



8365 Keystone Crossing, Suite 201
Indianapolis, IN 46240
Phone: (317) 202-0864 Fax: (317) 202-0908

Transportation & Site Engineering
Creating Order Since 1966



CORRIDOR STUDY

PLEASANT STREET EXTENSION

PREPARED FOR



***OCTOBER 2017
(UPDATED OCTOBER 2018)***

COPYRIGHT

This analysis and the ideas, designs, concepts and data contained herein are the exclusive intellectual property of A&F Engineering Co., LLC and are not to be used or reproduced in whole or in part, without the written consent of A&F Engineering Co., LLC.

©2018, A&F Engineering Co., LLC

TABLE OF CONTENTS

TABLE OF CONTENTS	II
LIST OF FIGURES	II
CERTIFICATION	III
INTRODUCTION & PURPOSE.....	1
SCOPE OF WORK.....	1
DESCRIPTION OF THE PROJECT	2
EXISTING TRAFFIC DATA & PEAK HOUR.....	2
YEAR 2027 TRAFFIC VOLUMES	3
YEAR 2027 RE-ASSIGNED TRAFFIC VOLUMES	3
CAPACITY ANALYSIS	9
DESCRIPTION OF LEVELS OF SERVICE	9
ANALYSIS RESULTS & RECOMMENDATIONS	10
TABLE 1 – LEVEL OF SERVICE SUMMARY.....	10
TABLE 2 – 95 TH PERCENTILE QUEUE LENGTH SUMMARY	12

LIST OF FIGURES

FIGURE 1: EXISTING TRAFFIC VOLUMES	4
FIGURE 2: EXISTING AVERAGE DAILY TRAFFIC	5
FIGURE 3: YEAR 2027 TRAFFIC VOLUMES	6
FIGURE 4: YEAR 2027 AVERAGE DAILY TRAFFIC	7
FIGURE 5: YEAR 2027 RE-ASSIGNED TRAFFIC VOLUMES	8
FIGURE 6: RECOMMENDED GEOMETRICS AND CONTROL	13
FIGURE 7A: LEVELS OF SERVICE AND 95 TH PERCENTILE QUEUE LENGTHS FOR THE RECOMMENDED GEOMETRICS AND CONTROL (AM PEAK)	14
FIGURE 7B: LEVELS OF SERVICE AND 95 TH PERCENTILE QUEUE LENGTHS FOR THE RECOMMENDED GEOMETRICS AND CONTROL (PM PEAK).....	15

CERTIFICATION

I certify that this **CORRIDOR STUDY** has been prepared by me and under my immediate supervision and that I have experience and training in the field of traffic and transportation engineering.

A&F ENGINEERING Co., LLC



R. Matt Brown, P.E.
Indiana Registration 10200056



Dixian Qiu, E.I
Traffic Engineer



Antoun Fadoul
Traffic Engineer

INTRODUCTION & PURPOSE

This **CORRIDOR STUDY**, prepared at the request of The City of Noblesville, is for the proposed extension of Pleasant Street from 8th Street to Hague Road in Noblesville, Indiana. The purpose of this study is to determine the amount of traffic that will make use of the Pleasant Street corridor between Hague Road and SR 37. Additionally, determine what geometrics and controls are needed along Pleasant Street. This analysis will be completed with the proposed White River Crossing and without the White River Crossing.

SCOPE OF WORK

The scope of work for this analysis is as follows:

First, obtain peak hour turning movement traffic volume counts between the hours of 6:30 AM to 8:30 AM and 3:30 P.M. to 6:30 P.M. during a typical weekday, at the following intersections:

- SR 32 & Hague Road
- SR 32 & Cherry Tree Road
- SR 32 & River Road
- SR 32 & SR 38
- SR 32/SR 38 & Highway 19
- SR 32/SR 38 & 8th Street
- SR 32/SR 38 & 10th Street
- SR 32/SR 38 & 19th Street
- SR 32/SR 38 & Cumberland Road
- SR 32/SR 38 & SR 37
- Pleasant Street & 8th Street
- Pleasant Street & 10th Street
- Pleasant Street & 16th Street
- Pleasant Street & 19th Street
- Pleasant Street & Clover Road
- Pleasant Street & SR 37

Second, collect average daily traffic volumes along SR 32 at the following locations:

- SR 32 west of Hague Road
- SR 32 east of Hague Road
- Hague Road north of SR 32
- SR 32 west of River Road
- SR 32 east of River Road
- SR 32/SR 38 west of White River
- SR 32/SR 38 east of White River
- SR 32/SR 38 west of 8th Street
- SR 32/SR 38 east of 8th Street
- 8th Street north of SR 32/SR 38
- 8th Street south of SR 32/SR 38
- SR 32/SR 38 west of 14th Street
- SR 32/SR 38 east of 14th Street
- SR 32/SR 38 west of Cumberland Road
- SR 32/SR 38 east of Cumberland Road

Third, collect origin and destination data via Bluetooth devices at several locations throughout the city.

Fourth, construct and calibrate a dynamic traffic model to resemble existing traffic conditions within the study area.

Fifth, calculate future peak hour traffic volumes for the study intersections and roadway segments based on a 10-year horizon period.

Sixth, review the amount of traffic that will divert from the existing SR 32 corridor between Hague Road and SR 37 when the Pleasant Street Extension is completed from Hague Road/SR 32 to SR 37.

Seventh, calculate level of service and queue length analysis at each of the following intersections along Pleasant Street for both roundabout and conventional intersection design:

- Pleasant Street & Hague Road
- Pleasant Street & River Road
- Pleasant Street & 8th Street
- Pleasant Street & 10th Street
- Pleasant Street & 16th Street
- Pleasant Street & 19th Street
- Pleasant Street & Clover Road
- Pleasant Street & SR 37

Finally, prepare a **CORRIDOR STUDY** report documenting all data, analyses, and conclusions and recommendations to best provide for the safe and efficient movement of traffic through the study area.

DESCRIPTION OF THE PROJECT

The project will consist of constructing an extension of Pleasant Street from 8th Street to Hague Road that will include a bridge over White River. Additionally, future improvements could include traffic signals and/or roundabouts at the following intersections:

- Pleasant Street & Hague Road
- Pleasant Street & River Road
- Pleasant Street & 8th Street
- Pleasant Street & 10th Street
- Pleasant Street & 16th Street
- Pleasant Street & 19th Street
- Pleasant Street & Clover Road

EXISTING TRAFFIC DATA & PEAK HOUR

Peak hour turning movement traffic volume counts were collected at each of the study intersections by A&F Engineering Co., LLC. The counts include all "through" traffic and all "turning" traffic at the intersections and were made between the hours of 6:30 AM to 8:30 AM and 4:30 PM to 6:30 PM during a typical weekday in September, 2017, under good weather conditions. Additionally, 24-hour traffic volume counts were gathered during a typical weekday in September 2017 along SR 32, in order to determine the average daily traffic volumes (ADT) and peak hour volumes along a

variety of roadway segments. The AM and PM peak hour volumes are graphically illustrated on **Figure 1**, while the ADT's are shown on **Figure 2**. The count output summary sheets for the study intersections and segments are included in the **Appendix**. In addition, several Bluetooth devices were placed across city to collect origin-destination information to be used for the traffic model.


YEAR 2027 TRAFFIC VOLUMES

It is anticipated that several developments will be constructed within the next few years that will have an impact on traffic volumes along Pleasant Street. In order to estimate additional traffic attributed to these developments, historical counts collected along SR 32 and previous growth rates used by INDOT were analyzed. This analysis showed that a 2% per year growth rate would be reasonable over a ten year study period. Therefore, the existing traffic volumes have been increased by a 1.2 growth factor to estimate year 2027 traffic volumes. The year 2027 peak hour turning movement volumes are shown on **Figure 3**, while the future ADT's are shown on **Figure 4**.

YEAR 2027 RE-ASSIGNED TRAFFIC VOLUMES

When the Pleasant Street extension is constructed, it is expected that some of the traffic using SR 32 to cross the White River will utilize the new Pleasant Street extension. *VISUM 16¹* was used to analyze the amount of traffic diverted to the Pleasant Street extension. *VISUM* utilizes the intersection and roadway segment input data to assign traffic for each Origin-Destination pair onto one or more travel routes within the network. Each of the scenarios was incorporated in the model and a traffic assignment was performed based on collected O-D Bluetooth data and existing traffic volumes to evaluate the impact of the Pleasant Street Extension. The re-assigned volumes are illustrated on **Figure 5**.

¹ *PTV VISUM 16.01-10*, PTV Group, 2016.

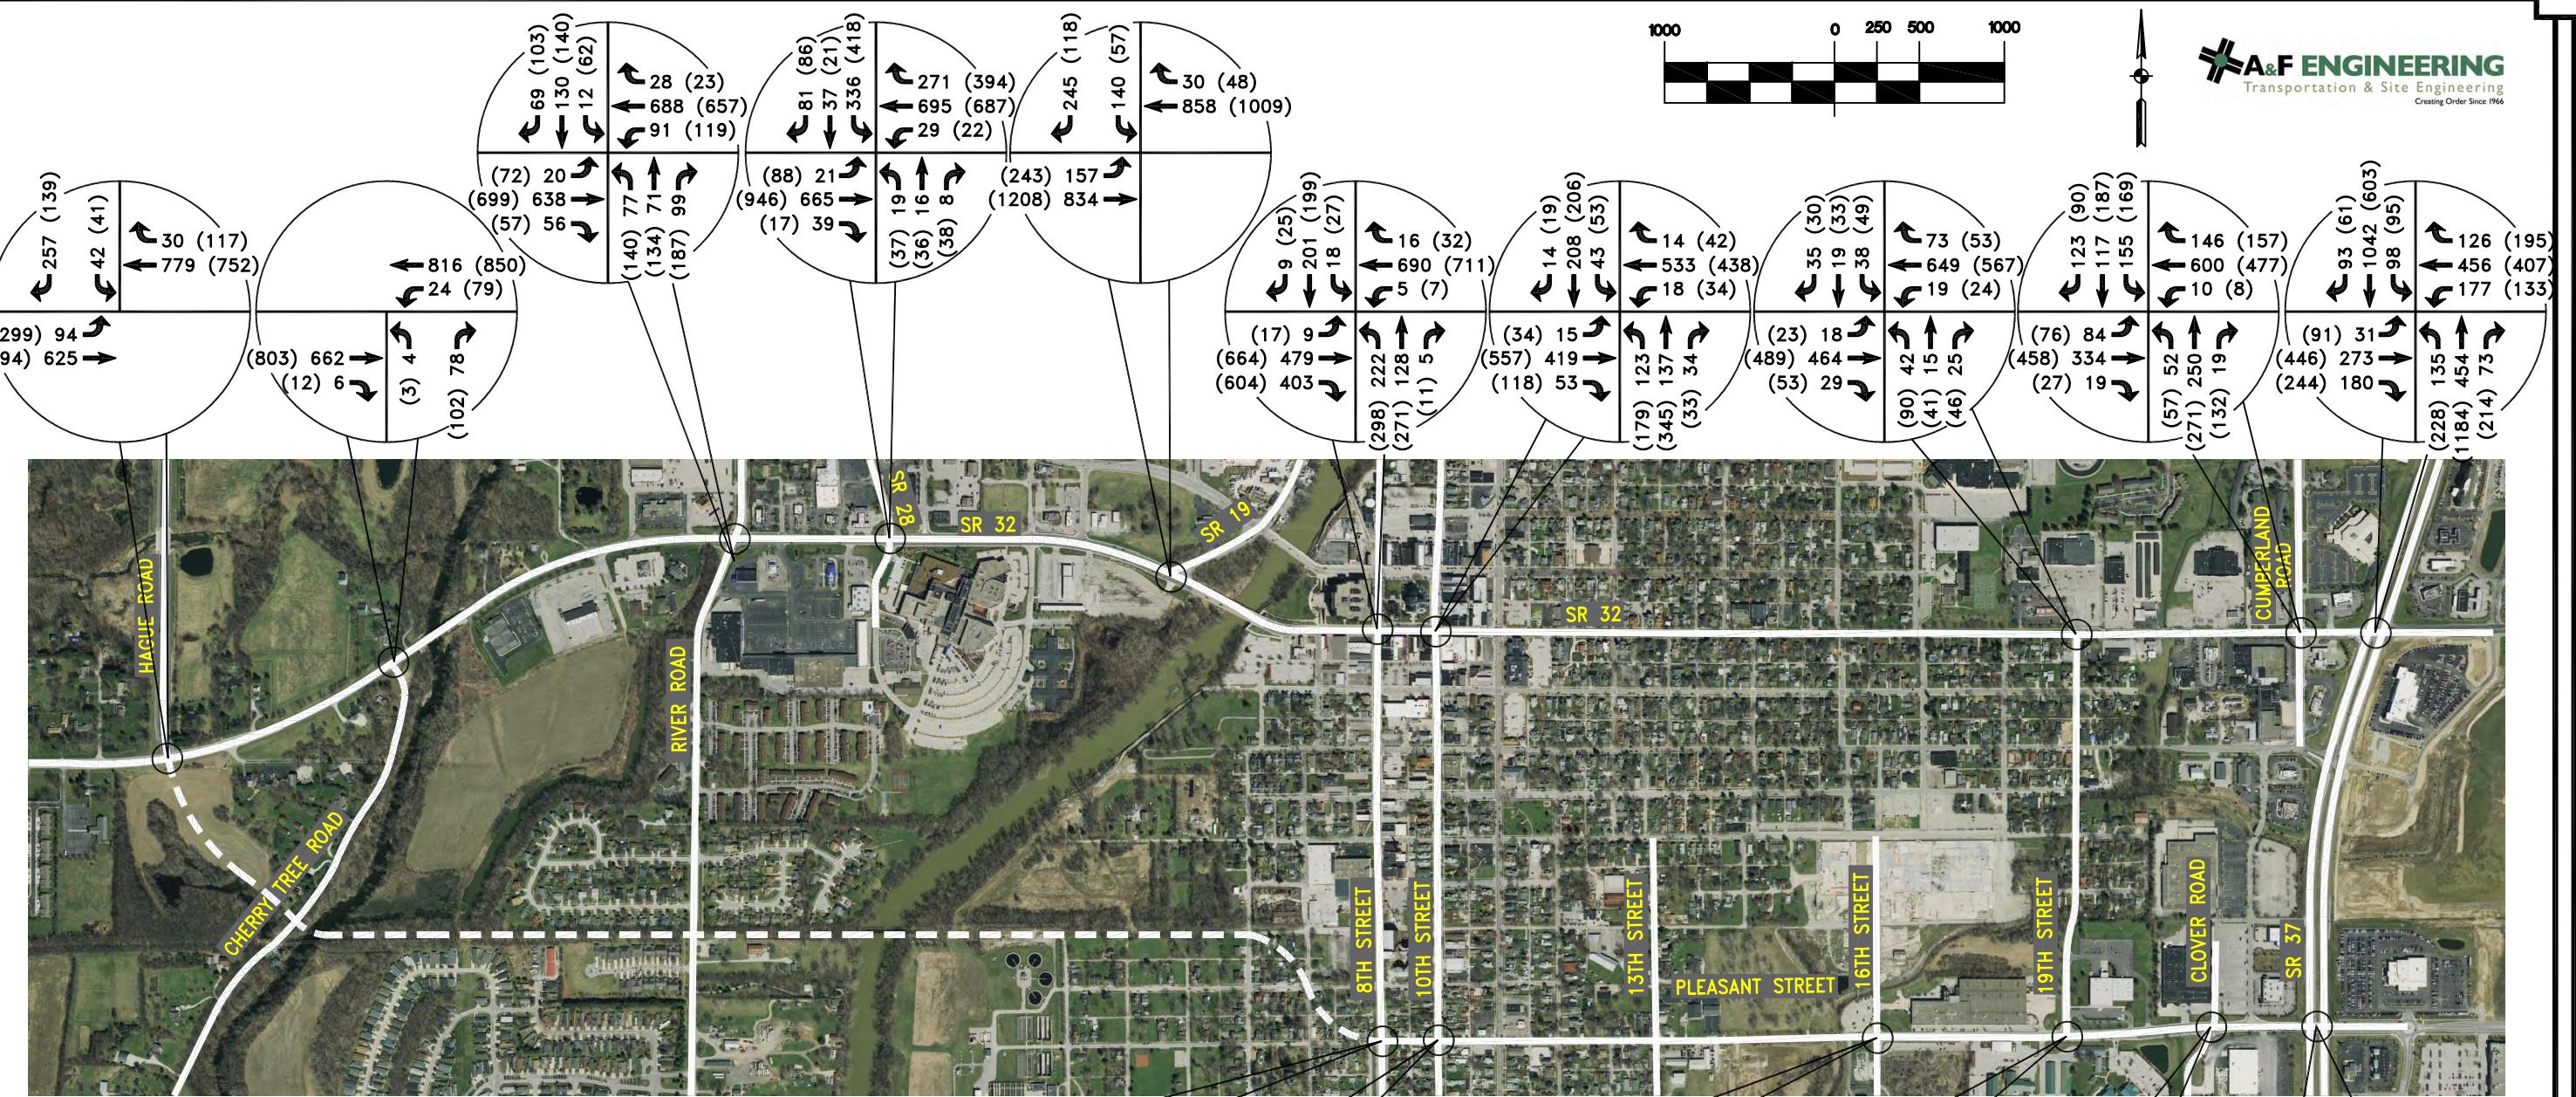

Z:\2016\16008S Nobelsville Pleasant Street\Corridor Queue Length Map.dwg 1=20 6-9-16 AF


**CORRIDOR STUDY
PLEASANT STREET EXTENSION - NOBLESVILLE, IN**

LEGEND

LEGEND

FIGURE 1

EXISTING TRAFFIC VOLUMES

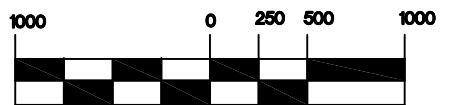


NOTE: THESE VOLUMES ARE ROUNDED TO THE NEAREST 10.

LEGEND
XX,XXX = AVERAGE DAILY TRAFFIC

CORRIDOR STUDY
PLEASANT STREET EXTENSION - NOBLESVILLE, IN

LEGEND
— EXISTING ROADWAY
- - - PROPOSED ROADWAY

FIGURE 2
EXISTING AVERAGE DAILY TRAFFIC

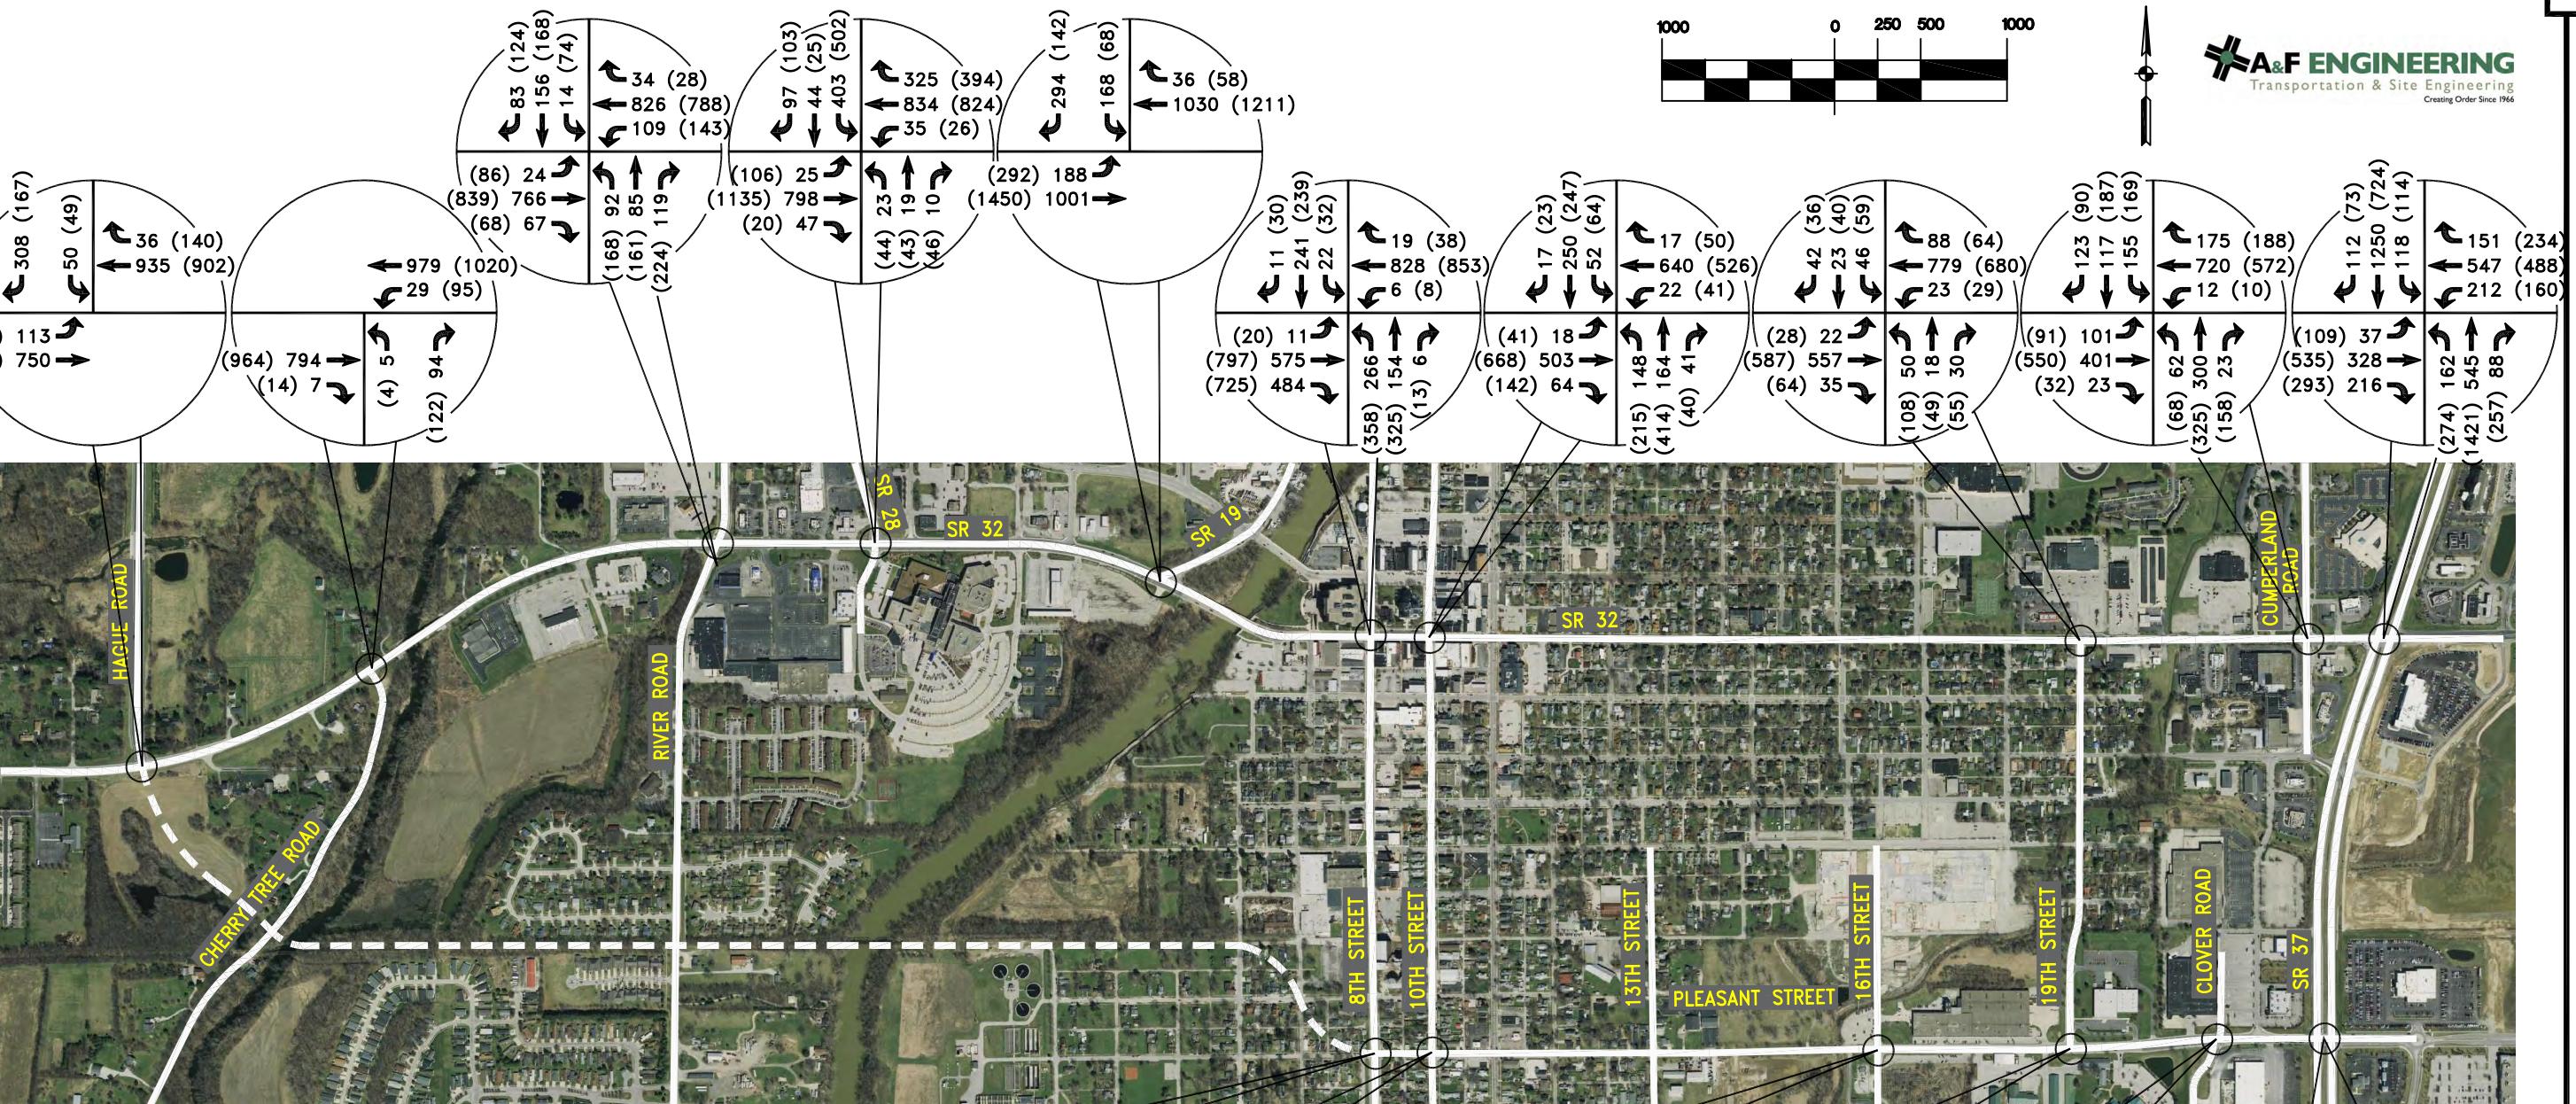


Z:\2016\Roads\Noblesville Pleasant Street\Corridor Queue Length Map.dwg 1=20 6-9-16 AF


LEGEND
XX = AM PEAK HOUR
(XX) = PM PEAK HOUR

CORRIDOR STUDY
PLEASANT STREET EXTENSION - NOBLESVILLE, IN

LEGEND
— EXISTING ROADWAY
- - - PROPOSED ROADWAY

FIGURE 3
YEAR 2027
TRAFFIC VOLUMES

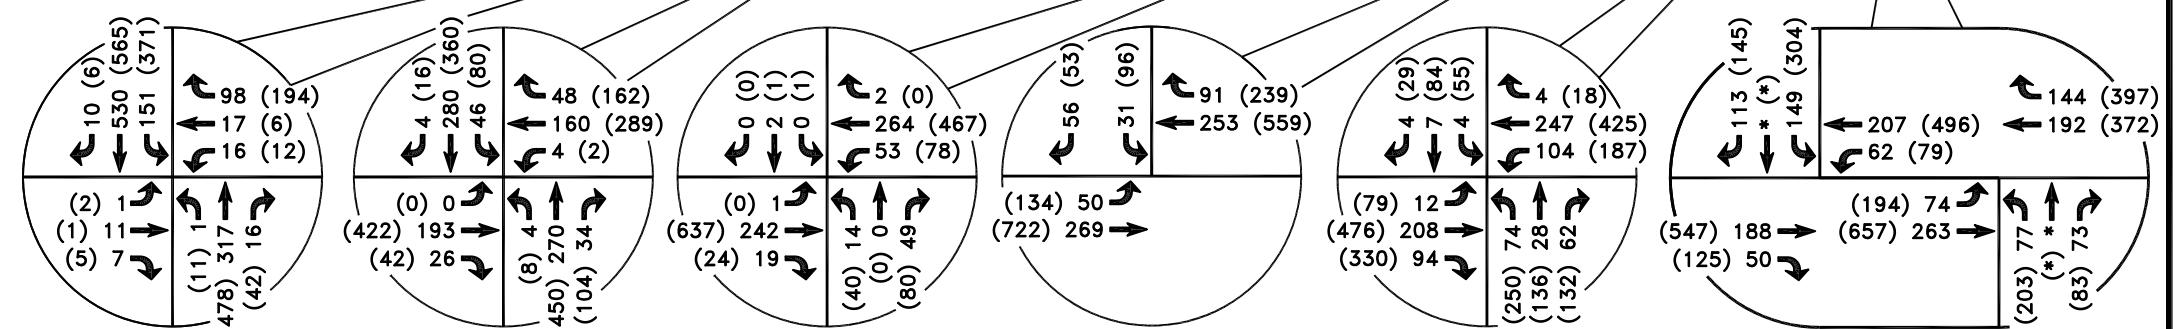

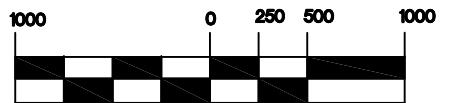

A&F ENGINEERING
Transportation & Site Engineering
Creating Order Since 1966




NOTE: THESE VOLUMES ARE ROUNDED TO THE NEAREST 10.

LEGEND
XX,XXX = AVERAGE DAILY TRAFFIC









CORRIDOR STUDY
PLEASANT STREET EXTENSION - NOBLESVILLE, IN

LEGEND
— EXISTING ROADWAY
- - - PROPOSED ROADWAY

FIGURE 4
YEAR 2027 AVERAGE DAILY TRAFFIC

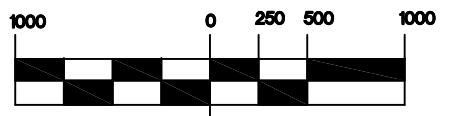

Z:\2016\Roads\Noblesville Pleasant Street Corridor Queue Length Map.dwg 1=20 6-9-16 AF

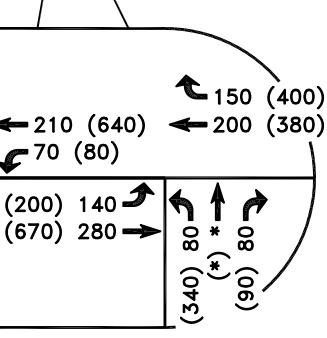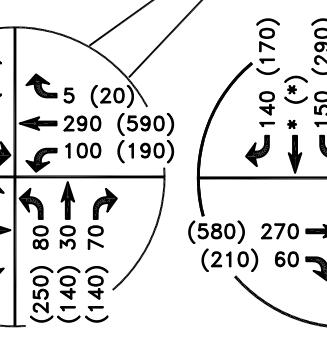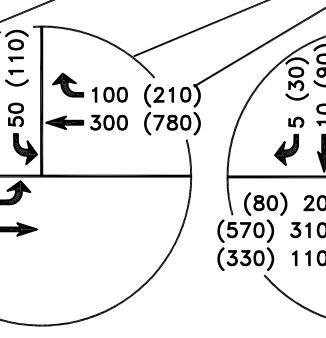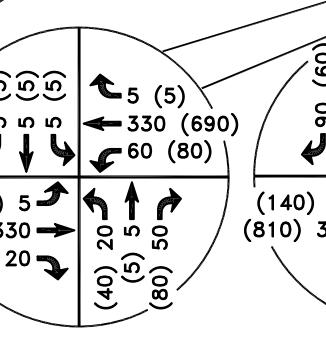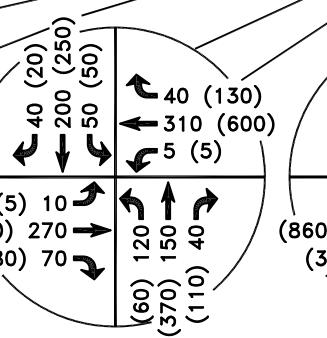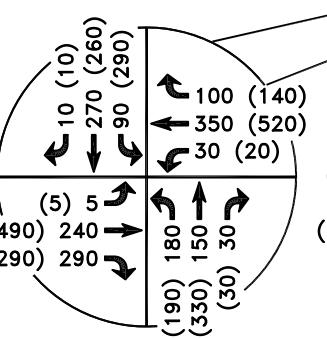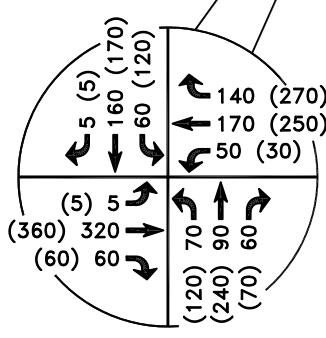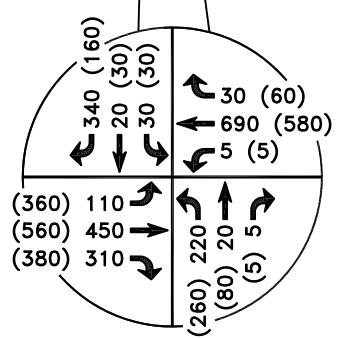

LEGEND

XX = AM PEAK HOUR
(XX) = PM PEAK HOUR

CORRIDOR STUDY
PLEASANT STREET EXTENSION - NOBLESVILLE, IN

LEGEND

— EXISTING ROADWAY
- - - PROPOSED ROADWAY

FIGURE 5

YEAR 2027 RE-ASSIGNED TRAFFIC VOLUMES

CAPACITY ANALYSIS

The "efficiency" of an intersection is based on its ability to accommodate the traffic volumes that approach the intersection. It is defined by the Level-of-Service (LOS) of the intersection. The LOS is determined by a series of calculations commonly called a "capacity analysis". Input data into a capacity analysis include traffic volumes, intersection geometry, number and use of lanes and, in the case of signalized intersections, traffic signal timing. To determine the LOS at each of the study intersections, a capacity analysis has been made using the recognized computer programs *Synchro*² and *SIDRA*³. *Synchro/SimTraffic* allows multiple intersections to be optimized and analyzed using the capacity calculation methods outlined within the *Highway Capacity Manual (HCM 6th Edition)*⁴. For this study, *Synchro* was used to analyze unsignalized and signalized intersections and *SIDRA* was used to analyze roundabout intersections.

DESCRIPTION OF LEVELS OF SERVICE

The following list shows the delays related to the levels of service for unsignalized, signalized, and roundabout intersections:

<u>Level of Service</u>	<u>Control Delay (seconds/vehicle)</u>	
	<u>UN SIGNALIZED</u>	<u>SIGNALIZED/RAB</u>
A	Less than or equal to 10	Less than or equal to 10
B	Between 10.1 and 15	Between 10.1 and 20
C	Between 15.1 and 25	Between 20.1 and 35
D	Between 25.1 and 35	Between 35.1 and 55
E	Between 35.1 and 50	Between 55.1 and 80
F	greater than 50	greater than 80

It should also be noted that LOS thresholds for signalized intersections were used for roundabouts in order to create an "apples to apples" comparison of each alternative.

² *Synchro/SimTraffic 10.0*, Trafficware, 2016.

³ *SIDRA INTERSECTION 6.1*, Akcelik & Associates Pty Ltd, 2015.

⁴ *Highway Capacity Manual (HCM 6th Edition)* Transportation Research Board, National Research Council, Washington, DC, 2016.

ANALYSIS RESULTS & RECOMMENDATIONS

Several conventional and roundabout improvement scenarios were considered for each of the study intersections. The following tables show a summary of the geometrics, LOS, and 95th percentile queue lengths for those scenarios at the study intersections. Based on the LOS and the 95th percentile queue length analysis, recommended geometrics and traffic control options were formulated. These recommendations are highlighted in the tables below along with the LOS and the 95th percentile queue results for each intersection. **Figure 6** illustrates these recommendations graphically, while **Figure 7A** and **Figure 7B** show the 95th percentile queue lengths corresponding to these recommendations.

TABLE 1 – LEVEL OF SERVICE SUMMARY


Intersection	Control Type	Geometrics	AM PEAK					PM PEAK				
			NB	SB	EB	WB	INT	NB	SB	EB	WB	INT
Pleasant St & SR 37 East Interchange	Roundabout Interchange	NBL, NBT/R; EBL/T, EBT; WBL/T, WBT/R	A	-	A	A	A	B	-	A	B	B
Pleasant St & SR 37 West Interchange	Roundabout Interchange	SBL, SBT/R; EBL/T, EBT/R; WBL/T, WBT	-	A	A	A	A	-	B	A	A	A
Pleasant Street & Clover Road	Signal	NBL, NBT/R; SBL, SBT/R; EBL, EBT, EBR; WBL, WBT, WBR	C	C	B	B	B	D	D	D	D	D
	Roundabout	NBL/T/R; SBL/T/R; EBT/L, EBT/R; WBT/L, WBT/R	A	A	A	A	A	C	B	B	B	B
Pleasant Street & 19th Street	Two-Way Stop	SBL, SBR; EBL, EBT; WBT, WBR	-	B	A	-	-	-	F	B	-	-
	Signal	SBL, SBR; EBL, EBT; WBT, WBR	-	B	A	A	A	-	C	A	B	B
	Roundabout	SBL/R; EBT/L, EBT; WBT, WBT/R	-	A	A	A	A	-	A	A	A	A
	Roundabout	SBL/R; EBL/T; WBT/R	-	A	A	A	A	-	B	E	C	D

Intersection	Control Type	Geometrics	AM PEAK					PM PEAK				
			NB	SB	EB	WB	INT	NB	SB	EB	WB	INT
Pleasant Street & 16th Street	Two-Way Stop	NBL/T/R; SBL/T/R; EBL, EBT/R; WBL, WBT/R	B	B	A	A	-	F	E	A	B	-
	Signal	NBL/T/R; SBL/T/R; EBL, EBT/R; WBL, WBT/R	A	A	A	A	A	C	C	A	A	A
	Roundabout	NBL/T/R; SBL/T/R; EBL/T/R; WBL/T/R	A	A	A	A	A	B	A	D	B	C
Pleasant Street & 10th Street	Signal	NBL, NBT/R; SBL, SBT/R; EBL, EBT/R; WBL, WBT/R	A	A	A	A	A	C	B	C	C	C
	Roundabout	NBL, NBT/R; SBL, SBT/R; EBL/T, EBT/R; WBL/T, WBT/R	A	A	A	A	A	C	A	A	A	B
Pleasant Street & 8th Street	Signal	NBL, NBT/R; SBL, SBT/R; EBL, EBT/R; WBL, WBT/R	B	C	C	B	B	D	D	E	C	D
	Roundabout	NBL, NBT/R; SBL, SBT/R; EBL/T, EBT/R; WBL/T, WBT/R	A	A	A	A	A	B	B	B	B	B
Pleasant Street & River Road	Signal	NBL, NBT/R; SBL, SBT/R; EBL, EBT/R; WBL, WBT/R	B	B	B	B	B	C	B	B	C	C
	Roundabout	NBL/T/R; SBL/T/R; EBL/T/R; WBL/T/R	A	A	A	A	A	B	A	A	B	B
SR 32 & Pleasant Street/ Hague Road	Signal	NBL, NBT/R; SBL, SBT/R; EBL, EBT, EBR; WBL, WBT, WBR	D	B	B	C	C	D	C	D	B	C
	Roundabout	NBL/T, NBT/R; SBL/T, SBT/R; EBL/T, EBT/R; WBL/T, WBT/R	A	B	A	A	A	B	A	A	B	B


TABLE 2 – 95TH PERCENTILE QUEUE LENGTH SUMMARY

Intersection	Control Type	Geometrics	AM PEAK				PM PEAK			
			NB	SB	EB	WB	NB	SB	EB	WB
Pleasant Street & SR 37 East Interchange	Roundabout	NBL, NBT/R; EBL/T, EBT; WBL/T, WBT/R	10'	-	-	20'	100'	-	-	80'
Pleasant Street & SR 37 West Interchange	Roundabout	SBL, SBT/R; EBL/T, EBT/R; WBL/T, WBT	-	20'	20'	-	-	60'	60'	-
Pleasant Street & Clover Road	Signal	NBL, NBT/R; SBL, SBT/R; EBL, EBT, EBR; WBL, WBT, WBR	80'	20'	200'	160'	330'	110'	590'	550'
	Roundabout	NBL/T/R; SBL/T/R; EBT/L, EBT/R; WBL/L, WBT/R	20'	0'	20'	20'	190'	40'	90'	80'
Pleasant Street & 19th Street	Two-Way Stop	SBL, SBR; EBL, EBT; WBT, WBR	-	10'	0'	0'	-	110'	30'	0'
	Signal	SBL, SBR; EBL, EBT; WBT, WBR	-	40'	80'	120'	-	90'	340'	540'
	Roundabout	SBL/R; EBT/L, EBT; WBT, WBT/R	-	10'	20'	20'	-	30'	60'	80'
	Roundabout	SBL/R; EBL/T; WBT/R	-	20'	50'	50'	-	40'	1560'	460'
Pleasant Street & 16th Street	Two-Way Stop	NBL/T/R; SBL/T/R; EBL, EBT/R; WBL, WBT/R	20'	0'	0'	0'	90'	10'	0'	10'
	Signal	NBL/T/R; SBL/T/R; EBL, EBT/R; WBL, WBT/R	30'	10'	80'	80'	60'	20'	410'	250'
	Roundabout	NBL/T/R; SBL/T/R; EBL/T/R; WBL/T/R	10'	0'	50'	50'	30'	0'	320'	160'
Pleasant Street & 10th Street	Signal	NBL, NBT/R; SBL, SBT/R; EBL, EBT/R; WBL, WBT/R	70'	100'	120'	130'	330'	140'	530'	450'
	Roundabout	NBL, NBT/R; SBL, SBT/R; EBL/T, EBT/R; WBL/T, WBT/R	20'	30'	20'	20'	170'	40'	80'	60'
Pleasant Street & 8th Street	Signal	NBL, NBT/R; SBL, SBT/R; EBL, EBT/R; WBL, WBT/R	130'	220'	320'	280'	420'	330'	800'	610'
	Roundabout	NBL, NBT/R; SBL, SBT/R; EBL/T, EBT/R; WBL/T, WBT/R	20'	40'	40'	40'	90'	60'	80'	80'
Pleasant Street & River Road	Signal	NBL, NBT/R; SBL, SBT/R; EBL, EBT/R; WBL, WBT/R	100'	130'	240'	170'	260'	150'	310'	420'
	Roundabout	NBL/T/R; SBL/T/R; EBL/T/R; WBL/T/R	30'	30'	60'	50'	110'	50'	80'	150'
SR 32 & Pleasant Street/Hague Road	Signal	NBL, NBT/R; SBL, SBT/R; EBL, EBT, EBR; WBL, WBR	200'	150'	200'	430'	250'	80'	390'	540'
	Roundabout	NBL/T, NBT/R; SBL/T, SBT/R; EBL/T, EBT/R; WBL/T, WBT/R	30'	110'	60'	50'	70'	30'	110'	80'

* Note: The queues are rounded to the nearest 10.

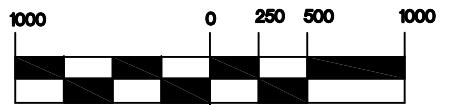

A&F ENGINEERING
Transportation & Site Engineering
Creating Order Since 1966

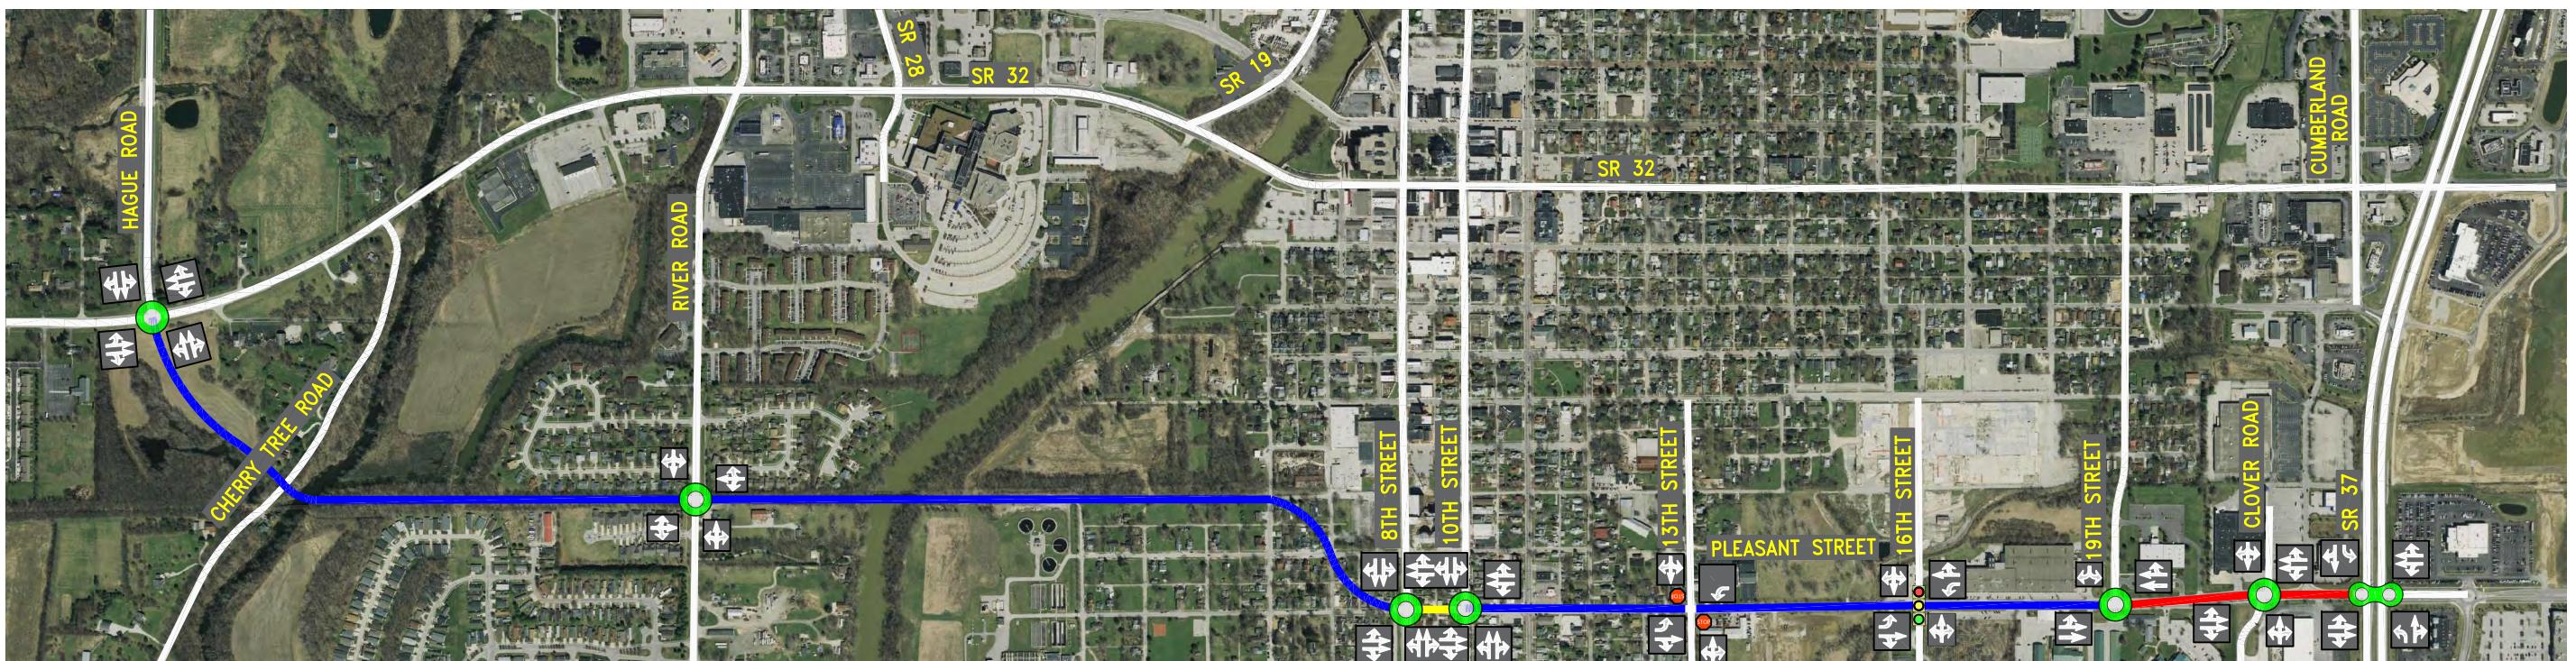



Z:\2016\Roads\Noblesville Pleasant Street Corridor Queue Length Map.dwg 1=20 6-9-16 AF

CORRIDOR STUDY
PLEASANT STREET EXTENSION - NOBLESVILLE, IN

LEGEND	
	4-Lane Section with Optional Median/TWLTL
	2-Lane Section with Optional Median/TWLTL
	4-Lane Section with Median
	Traffic Signal
	Single or Multi-Lane Roundabout

FIGURE 6

**RECOMMENDED INTERSECTION
GEOMETRICS & CONTROL**

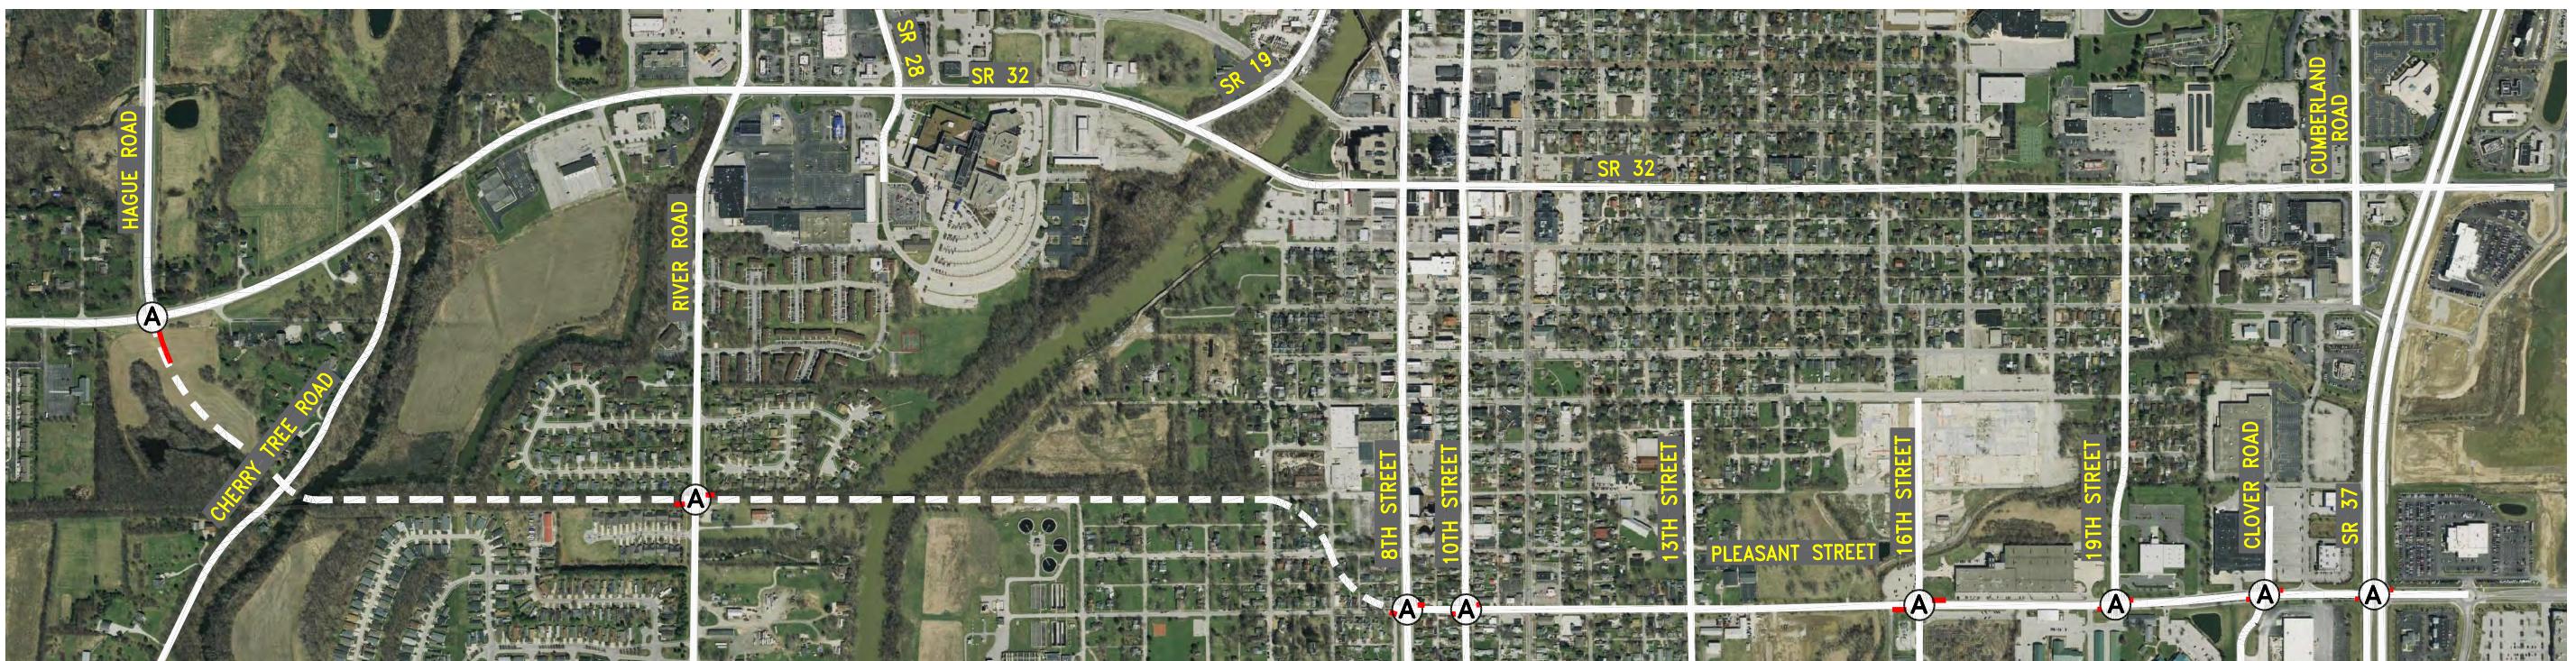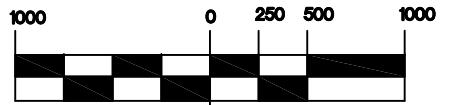

Z:\2016\Roads\Noblesville Pleasant Street\Corridor Queue Length Map.dwg 1=20 6-9-16 AF

CORRIDOR STUDY
PLEASANT STREET EXTENSION - NOBLESVILLE, IN



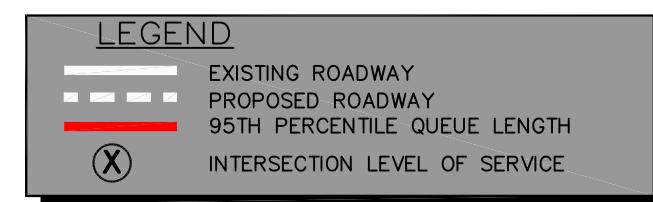


FIGURE 7A

**LOS & 95TH PERCENTILE
QUEUE LENGTHS
(AM PEAK)**

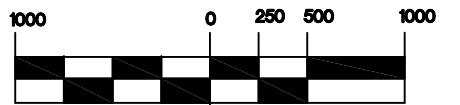

A&F ENGINEERING
Transportation & Site Engineering
Creating Order Since 1966

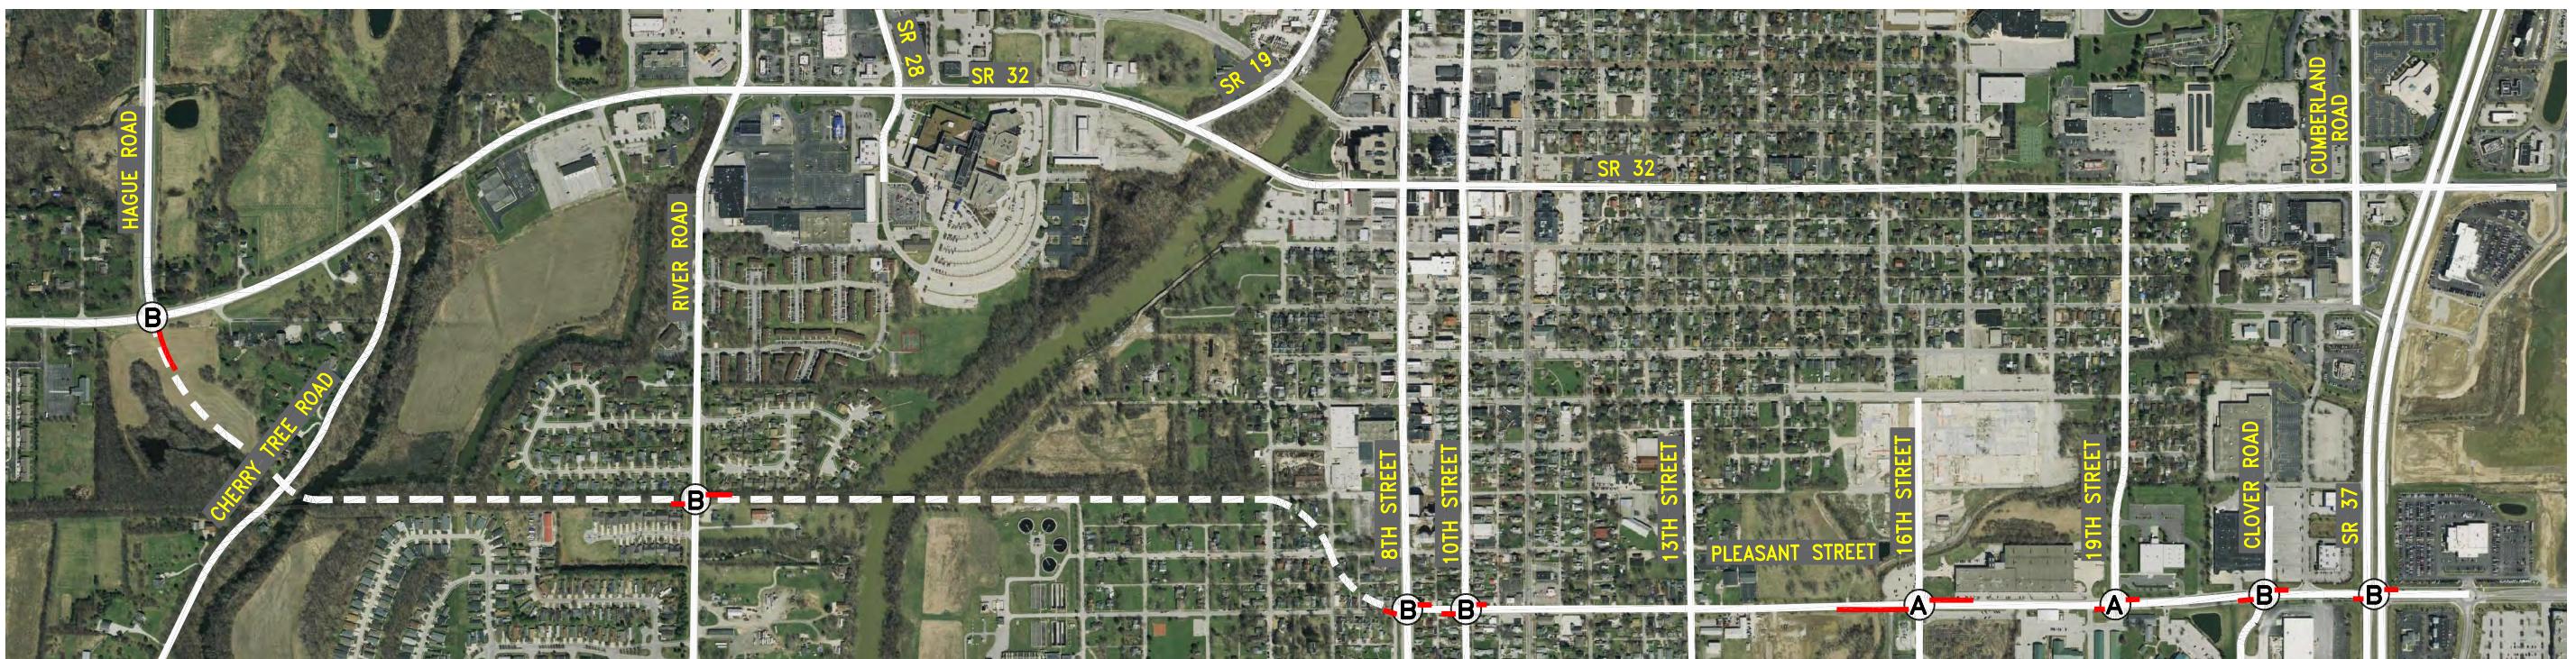

Z:\2016\Roads\Noblesville Pleasant Street Corridor Queue Length Map.dwg 1=20 6-9-16 AF

**CORRIDOR STUDY
PLEASANT STREET EXTENSION - NOBLESVILLE, IN**

LEGEND	
—	EXISTING ROADWAY
- - -	PROPOSED ROADWAY
—	95TH PERCENTILE QUEUE LENGTH
(X)	INTERSECTION LEVEL OF SERVICE

FIGURE 7B

**LOS & 95TH PERCENTILE
QUEUE LENGTHS
(PM PEAK)**

CORRIDOR STUDY

APPENDIX



***8365 Keystone Crossing Boulevard, Suite 201
Indianapolis, IN 46240
Phone: (317) 202-0864 Fax: (317) 202-0908***

SR 32 & SR 37

TRAFFIC VOLUME COUNTS

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :
COUNTED BY :

City of Noblesville
SR 32/SR 38 & SR 37
8/30/2017
Miovisions

	TOTAL VEHICLES (PASSENGER CARS + TRUCKS)											
	AM PEAK HOUR VOLUMES BEGINS 7:00 AM				OFF PEAK HOUR VOLUMES BEGINS 2:00 PM				PM PEAK HOUR VOLUMES BEGINS 4:45 PM			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	135	454	73	662	200	670	146	1016	228	1184	214	1626
SOUTHBOUND	98	1042	93	1233	71	496	34	601	95	603	61	759
EASTBOUND	31	273	180	484	72	338	295	705	91	446	244	781
WESTBOUND	177	456	126	759	164	295	94	553	133	407	195	735

	PEAK HOUR FACTOR					
	AM PEAK HOUR FACTOR		OFF PEAK HOUR FACTOR		PM PEAK HOUR FACTOR	
	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION
NORTHBOUND	0.92		0.89		0.93	
SOUTHBOUND	0.90		0.92		0.93	
EASTBOUND	0.89	0.95	0.96	0.93	0.90	
WESTBOUND	0.90		0.89		0.92	

	TRUCK PERCENTAGE											
	AM PEAK HOUR PERCENTAGE				OFF PEAK HOUR PERCENTAGE				PM PEAK HOUR PERCENTAGE			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	3.0%	6.6%	6.8%	5.9%	5.0%	5.2%	7.5%	5.5%	0.9%	0.7%	2.3%	0.9%
SOUTHBOUND	6.1%	2.8%	6.5%	3.3%	5.6%	6.0%	0.0%	5.7%	1.1%	3.0%	3.3%	2.8%
EASTBOUND	9.7%	5.5%	9.4%	7.2%	0.0%	7.1%	4.7%	5.4%	0.0%	3.4%	3.7%	3.1%
WESTBOUND	6.2%	5.5%	2.4%	5.1%	6.7%	9.8%	3.2%	7.8%	1.5%	1.0%	1.5%	1.2%

HOURLY SUMMARY												
	HOUR		NB	SB	NB+SB	EB	WB	EB+WB				TOTAL
12:00 AM	TO	1:00 AM	52	28	80	30	25	55				135
1:00 AM	TO	2:00 AM	44	26	70	33	35	68				138
2:00 AM	TO	3:00 AM	38	31	69	30	12	42				111
3:00 AM	TO	4:00 AM	32	57	89	28	19	47				136
4:00 AM	TO	5:00 AM	55	151	206	34	53	87				293
5:00 AM	TO	6:00 AM	128	452	580	123	163	286				866
6:00 AM	TO	7:00 AM	356	991	1347	349	458	807				2154
7:00 AM	TO	8:00 AM	662	1233	1895	484	759	1243				3138
8:00 AM	TO	9:00 AM	623	986	1609	485	658	1143				2752
9:00 AM	TO	10:00 AM	656	741	1397	562	489	1051				2448
10:00 AM	TO	11:00 AM	667	591	1258	597	445	1042				2300
11:00 AM	TO	12:00 PM	755	676	1431	682	490	1172				2603
12:00 PM	TO	1:00 PM	889	663	1552	740	540	1280				2832
1:00 PM	TO	2:00 PM	895	598	1493	663	561	1224				2717
2:00 PM	TO	3:00 PM	1016	601	1617	705	553	1258				2875
3:00 PM	TO	4:00 PM	1147	733	1880	747	521	1268				3148
4:00 PM	TO	5:00 PM	1447	745	2192	764	686	1450				3642
5:00 PM	TO	6:00 PM	1596	774	2370	788	704	1492				3862
6:00 PM	TO	7:00 PM	1233	736	1969	732	468	1200				3169
7:00 PM	TO	8:00 PM	878	634	1512	633	322	955				2467
8:00 PM	TO	9:00 PM	695	498	1193	466	296	762				1955
9:00 PM	TO	10:00 PM	499	265	764	276	182	458				1222
10:00 PM	TO	11:00 PM	294	131	425	153	117	270				695
11:00 PM	TO	12:00 AM	124	71	195	80	132	327				
TOTAL VOLUME				14781	12412	27193	10184	8608	18792			45985
PERCENTAGE				32.1%	27.0%	59.1%	22.1%	18.7%	40.9%			100.0%

CLIENT :
INTERSECTION :
DATE :City of Noblesville
SR 32/SR 38 & SR 37
8/30/2017

DIRECTION OF TRAVEL : NORTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
12:00 AM - 1:00 AM	7	0	7	33	1	34	10	2	11	50	52	52
1:00 AM - 2:00 AM	4	3	7	1	25	26	0	2	12	38	6	44
2:00 AM - 3:00 AM	4	0	4	18	2	20	12	2	14	34	4	38
3:00 AM - 4:00 AM	6	3	9	18	0	18	5	0	5	29	3	32
4:00 AM - 5:00 AM	5	2	7	28	8	36	12	0	12	45	10	55
5:00 AM - 6:00 AM	29	1	30	73	8	81	16	1	17	118	10	128
6:00 AM - 7:00 AM	69	5	74	220	26	246	32	4	36	321	35	356
7:00 AM - 8:00 AM	131	4	135	36	454	464	65	5	73	623	39	662
8:00 AM - 9:00 AM	167	14	181	315	45	360	75	7	82	567	66	623
9:00 AM - 10:00 AM	169	10	179	342	33	375	92	10	102	603	66	656
OFF TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
10:00 AM - 11:00 AM	167	16	183	338	38	376	102	6	108	607	60	667
11:00 AM - 12:00 PM	9	206	387	32	419	118	12	130	702	50	755	
12:00 PM - 1:00 PM	224	6	230	506	27	533	119	7	126	848	40	889
1:00 PM - 2:00 PM	240	8	248	491	27	518	122	7	129	853	42	895
2:00 PM - 3:00 PM	190	10	200	635	35	670	135	11	146	960	56	1016
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
3:00 PM - 4:00 PM	20	5	21	26	1	27	7	170	109	30	1147	
4:00 PM - 5:00 PM	198	3	201	97	15	1012	230	4	224	1429	22	1447
5:00 PM - 6:00 PM	244	2	246	1152	11	1163	181	6	187	1577	19	1596
6:00 PM - 7:00 PM	197	1	198	880	12	892	140	3	143	1217	16	1233
7:00 PM - 8:00 PM	152	4	156	613	3	616	104	2	106	869	9	878
8:00 PM - 9:00 PM	103	2	105	503	5	508	82	0	82	688	7	695
9:00 PM - 10:00 PM	82	1	83	353	4	357	59	0	59	494	5	499
10:00 PM - 11:00 PM	32	0	32	208	3	211	50	1	51	290	4	294
11:00 PM - 12:00 AM	16	0	16	83	3	86	22	0	22	121	1	124
PASSENGER	2838			9382			1959			14797		
	95.3%			86.9%			85.2%			85.9%		
TRUCK	109			365			98			602		
BOTH	2947			9777			2057			14781		
	19.9%			66.1%			13.9%			100.0%		

DIRECTION OF TRAVEL : SOUTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
12:00 AM - 1:00 AM	1	0	1	24	1	25	2	0	2	27	1	28
1:00 AM - 2:00 AM	3	1	4	18	2	20	0	2	2	21	5	26
2:00 AM - 3:00 AM	2	0	2	24	4	28	1	0	1	27	4	31
3:00 AM - 4:00 AM	3	0	5	12	4	13	5	0	5	53	4	57
4:00 AM - 5:00 AM	13	0	13	125	6	131	7	0	7	145	6	151
5:00 AM - 6:00 AM	13	0	13	401	15	416	23	0	23	437	15	452
6:00 AM - 7:00 AM	36	3	39	866	21	887	64	1	65	966	25	991
7:00 AM - 8:00 AM	92	6	98	1013	29	1042	87	6	93	1192	41	1233
8:00 AM - 9:00 AM	76	4	80	795	26	821	82	3	85	953	33	986
9:00 AM - 10:00 AM	59	6	65	572	32	604	69	3	72	700	41	741
OFF TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
10:00 AM - 11:00 AM	50	5	55	461	21	482	51	3	54	562	29	591
11:00 AM - 12:00 PM	61	3	64	510	33	549	62	7	69	633	43	676
12:00 PM - 1:00 PM	74	5	79	507	25	532	47	5	52	626	32	693
1:00 PM - 2:00 PM	58	5	63	448	36	484	48	3	51	554	34	598
2:00 PM - 3:00 PM	67	4	71	466	30	496	34	0	34	567	34	601
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
3:00 PM - 4:00 PM	91	7	98	546	37	583	51	1	58	688	45	733
4:00 PM - 5:00 PM	106	1	107	555	25	580	56	2	58	717	28	745
5:00 PM - 6:00 PM	88	1	89	608	14	622	62	1	63	758	16	774
6:00 PM - 7:00 PM	89	1	90	580	14	594	52	0	52	721	15	736
7:00 PM - 8:00 PM	75	0	75	521	11	528	26	1	27	622	12	634
8:00 PM - 9:00 PM	68	3	69	307	10	407	21	1	22	484	14	496
9:00 PM - 10:00 PM	20	1	21	203	4	207	31	0	31	260	5	265
10:00 PM - 11:00 PM	14	0	14	97	3	100	16	1	17	127	4	131
11:00 PM - 12:00 AM	6	0	6	59	2	61	4	0	4	69	2	71
PASSENGER	1171			9839			901			11911		
	95.4%			96.0%			95.7%			96.0%		
TRUCK	56			405			40			501		
BOTH	1227			10244			941			12412		
	9.9%			82.5%			7.6%			100.0%		

DIRECTION OF TRAVEL : EASTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
12:00 AM - 1:00 AM	3	0	3	19	2	20	9	1	10	28	5	33
1:00 AM - 2:00 AM	2	0	3	16	4	20	0	2	2	25	3	28
2:00 AM - 3:00 AM	3	1	4	10	2	12	11	3	14	24	6	30
3:00 AM - 4:00 AM	1	1	2	13	1	14	11	1	12	25	3	28
4:00 AM - 5:00 AM	1	1	2	14	2	16	13	2	15	28	6	34
5:00 AM - 6:00 PM	85	1	86	146	16	143	43	0	43	250	76	768
6:00 PM - 7:00 PM	109	0	109	303	9	372	24	6	246	718	14	723
7:00 PM - 8:00 PM	71	2	73	307	4	311	247	2	249	625	8	633
8:00 PM - 9:00 PM	61	0	61	181	2	183	221	1	222	463	3	466
9:00 PM - 10:00 PM	41	0	41	130	6	136	96	3	99	267	9	276
10:00 PM - 11:00 PM	10	3	13	79	5	84	53	3	56	142	11	153
11:00 PM - 12:00 AM	7	1	8	40	1	41	31	0	31	78	2	80
PASSENGER	1050			4667			3913			9630		
	95.6%			93.5%			95.5%			94.6%		
TRUCK	44			324			186			554		
BOTH	1094			4991			4069			10184		
	10.7%			49.0%			40.2%			100.0%		

DIRECTION OF TRAVEL : WESTBOUND

| HOUR | LEFT | | | THROUGH | | |
<th colspan
| --- | --- | --- | --- | --- | --- | --- |

SR 32 & CUMBERLAND ROAD

TRAFFIC VOLUME COUNTS

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :
COUNTED BY :

City of Noblesville
SR32/38 & Cumberland Road
9/21/2017
Miovision

	TOTAL VEHICLES (PASSENGER CARS + TRUCKS)											
	AM PEAK HOUR VOLUMES BEGINS 7:00 AM				OFF PEAK HOUR VOLUMES BEGINS 12:45 PM				PM PEAK HOUR VOLUMES BEGINS 5:00 PM			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	52	250	19	321	59	211	71	341	57	271	132	460
SOUTHBOUND	155	117	123	395	179	186	99	464	169	187	90	446
EASTBOUND	84	334	19	437	79	524	66	669	76	458	27	561
WESTBOUND	10	600	146	756	24	523	109	656	8	477	157	642

	PEAK HOUR FACTOR											
	AM PEAK HOUR FACTOR				OFF PEAK HOUR FACTOR				PM PEAK HOUR FACTOR			
	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION
NORTHBOUND	0.70		0.86		0.84							
SOUTHBOUND	0.80		0.60		0.83							
EASTBOUND	0.87	0.81	0.86		0.86							
WESTBOUND	0.84		0.96		0.94							

	TRUCK PERCENTAGE											
	AM PEAK HOUR PERCENTAGE				OFF PEAK HOUR PERCENTAGE				PM PEAK HOUR PERCENTAGE			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	1.9%	4.0%	10.5%	4.0%	1.7%	3.3%	4.2%	3.2%	0.0%	0.7%	0.8%	0.7%
SOUTHBOUND	6.5%	1.7%	0.0%	3.0%	1.7%	0.5%	2.0%	1.3%	0.0%	0.5%	0.0%	0.2%
EASTBOUND	0.0%	8.7%	0.0%	6.6%	2.5%	9.2%	1.5%	7.6%	0.0%	3.7%	0.0%	3.0%
WESTBOUND	10.0%	7.2%	5.5%	6.9%	4.2%	8.0%	1.8%	6.9%	0.0%	2.3%	0.0%	1.7%

HOURLY SUMMARY												
HOUR			NB	SB	NB+SB	EB	WB	EB+WB	TOTAL			
6:00 AM	TO	7:00 AM	86	184	270	261	421	682	952			
7:00 AM	TO	8:00 AM	321	395	716	437	756	1193	1909			
8:00 AM	TO	9:00 AM	188	319	507	474	592	1066	1573			
10:00 AM	TO	11:00 AM	218	356	574	581	606	1187	1761			
11:00 AM	TO	12:00 PM	240	328	568	653	530	1183	1751			
12:00 PM	TO	1:00 PM	354	356	710	655	593	1248	1958			
1:00 PM	TO	2:00 PM	330	463	793	675	637	1312	2105			
2:00 PM	TO	3:00 PM	306	486	792	658	545	1203	1995			
3:00 PM	TO	4:00 PM	318	409	727	608	528	1136	1863			
4:00 PM	TO	5:00 PM	429	490	919	551	603	1154	2073			
5:00 PM	TO	6:00 PM	460	446	906	561	642	1203	2109			
6:00 PM	TO	7:00 PM	289	345	634	615	536	1151	1785			
TOTAL VOLUME			3539	4577	8116	6729	6989	13718	21834			
PERCENTAGE			16.2%	21.0%	37.2%	30.8%	32.0%	62.8%	100.0%			

CLIENT : City of Noblesville
INTERSECTION : SR32/38 & Cumberland Road
DATE : 9/21/2017

DIRECTION OF TRAVEL : NORTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	25	0	25	56	1	57	4	0	4	85	1	86
7:00 AM - 8:00 AM	51	1	52	240	10	250	17	2	19	308	13	321
8:00 AM - 9:00 AM	43	3	46	108	21	129	13	0	13	164	24	188
OFF TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
10:00 AM - 11:00 AM	60	1	61	123	1	124	32	1	33	215	3	218
11:00 AM - 12:00 PM	58	0	58	130	4	134	46	2	48	234	6	240
12:00 PM - 1:00 PM	74	3	77	198	6	204	69	4	73	341	13	354
1:00 PM - 2:00 PM	59	1	60	186	6	192	76	2	78	321	9	330
2:00 PM - 3:00 PM	63	0	63	173	6	179	64	0	64	300	6	306
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
3:00 PM - 4:00 PM	57	5	62	158	15	173	80	3	83	295	23	318
4:00 PM - 5:00 PM	66	0	66	229	4	233	130	0	130	425	4	429
5:00 PM - 6:00 PM	57	0	57	269	2	271	131	1	132	457	3	460
6:00 PM - 7:00 PM	55	0	55	173	0	173	60	1	61	288	1	289
PASSENGER	668			2043			722			3433		
	97.9%			96.4%			97.8%			97.0%		
TRUCK	14			76			16			106		
	2.1%			3.6%			2.2%			3.0%		
BOTH	682			2119			738			3539		
	19.3%			59.9%			20.9%			100.0%		

DIRECTION OF TRAVEL : SOUTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	95	14	109	37	1	38	37	0	37	169	15	184
7:00 AM - 8:00 AM	145	10	155	115	2	117	123	0	123	383	12	395
8:00 AM - 9:00 AM	124	4	128	119	2	121	69	1	70	312	7	319
OFF TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
10:00 AM - 11:00 AM	139	4	143	121	2	123	89	1	90	349	7	356
11:00 AM - 12:00 PM	130	5	135	115	0	115	77	1	78	322	6	328
12:00 PM - 1:00 PM	132	2	134	140	1	141	79	2	81	351	5	356
1:00 PM - 2:00 PM	169	5	174	194	1	195	93	1	94	456	7	463
2:00 PM - 3:00 PM	168	4	172	195	4	199	115	0	115	478	8	486
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
3:00 PM - 4:00 PM	149	3	152	155	1	156	101	0	101	405	4	409
4:00 PM - 5:00 PM	191	2	193	198	0	198	99	0	99	488	2	490
5:00 PM - 6:00 PM	169	0	169	186	1	187	90	0	90	445	1	446
6:00 PM - 7:00 PM	122	0	122	148	0	148	75	0	75	345	0	345
PASSENGER	1733			1723			1047			4503		
	97.0%			99.1%			99.4%			98.4%		
TRUCK	53			15			6			74		
	3.0%			0.9%			0.6%			1.6%		
BOTH	1786			1738			1053			4577		
	39.0%			38.0%			23.0%			100.0%		

DIRECTION OF TRAVEL : EASTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	19	0	19	214	15	229	13	0	13	246	15	261
7:00 AM - 8:00 AM	84	0	84	305	29	334	19	0	19	408	29	437
8:00 AM - 9:00 AM	66	2	68	335	36	371	33	2	35	434	40	474
OFF TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
10:00 AM - 11:00 AM	72	0	72	417	41	458	51	0	51	540	41	581
11:00 AM - 12:00 PM	60	3	63	491	40	531	58	1	59	609	44	653
12:00 PM - 1:00 PM	82	1	83	475	37	512	60	0	60	617	38	655
1:00 PM - 2:00 PM	81	1	82	485	43	528	63	2	65	629	46	675
2:00 PM - 3:00 PM	91	0	91	469	57	526	41	0	41	601	57	658
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
3:00 PM - 4:00 PM	65	3	68	471	31	502	37	1	38	573	35	608
4:00 PM - 5:00 PM	67	0	67	426	32	458	26	0	26	519	32	551
5:00 PM - 6:00 PM	76	0	76	441	17	458	27	0	27	544	17	561
6:00 PM - 7:00 PM	86	1	87	473	14	487	41	0	41	600	15	615
PASSENGER	849			5002			469			6320		
	98.7%			92.7%			98.7%			93.9%		
TRUCK	11			392			6			409		
	1.3%			7.3%			1.3%			6.1%		
BOTH	860			5394			475			6729		
	12.8%			80.2%			7.1%			100.0%		

DIRECTION OF TRAVEL : WESTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	1	0	1	360	11	371	48	1	49	409	12	421
7:00 AM - 8:00 AM	9	1	10	557	43	600	138	8	146	704	52	756
8:00 AM - 9:00 AM	9	0	9	476	34	510	68	5	73	553	39	592
OFF TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
10:00 AM - 11:00 AM	16	0	16	475	31	506	81	3	84	572	34	606
11:00 AM - 12:00 PM	27	1	28	404	32	436	63	3	66	494	36	530
12:00 PM - 1:00 PM	21	0	21	432	41	473	98	1	99	551	42	593
1:00 PM - 2:00 PM	19	1	20	482	36	518	97	2	99	598	39	637
2:00 PM - 3:00 PM	19	0	19	399	23	422	103	1	104	521	24	545
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
3:00 PM - 4:00 PM	15	0	15	394	31	425	81	7	88	490	38	528
4:00 PM - 5:00 PM	23	0	23	423	23	446	134	0	134	580	23	603
5:00 PM - 6:00 PM	8	0	8	466	11	477	157	0	157	631	11	642
6:00 PM - 7:00 PM	7	0	7	390	4	394	135	0	135	532	4	536
PASSENGER	174			5258			1203			6635		
	98.3%											

SR 32 & 19th STREET

TRAFFIC VOLUME COUNTS

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :
COUNTED BY :

City of Noblesville SR
32/38 & 19th Street
9/12/2017
Miovision

	TOTAL VEHICLES (PASSENGER CARS + TRUCKS)											
	AM PEAK HOUR VOLUMES BEGINS 7:15 AM				OFF PEAK HOUR VOLUMES BEGINS				PM PEAK HOUR VOLUMES BEGINS 5:00 PM			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	42	15	25	82					90	41	46	177
SOUTHBOUND	38	19	35	92					49	33	30	112
EASTBOUND	18	464	29	511					23	489	53	565
WESTBOUND	19	649	73	741					24	567	53	644

	PEAK HOUR FACTOR											
	AM PEAK HOUR FACTOR				OFF PEAK HOUR FACTOR				PM PEAK HOUR FACTOR			
	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION
NORTHBOUND	0.71								0.96			
SOUTHBOUND	0.88								0.80			
EASTBOUND	0.95		0.92						0.94			0.97
WESTBOUND	0.89								0.93			

	TRUCK PERCENTAGE											
	AM PEAK HOUR PERCENTAGE				OFF PEAK HOUR PERCENTAGE				PM PEAK HOUR PERCENTAGE			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	0.0%	0.0%	0.0%	0.0%					0.0%	0.0%	0.0%	0.0%
SOUTHBOUND	5.3%	5.3%	0.0%	3.3%					0.0%	0.0%	0.0%	0.0%
EASTBOUND	0.0%	8.4%	3.4%	7.8%					0.0%	3.7%	1.9%	3.4%
WESTBOUND	0.0%	5.5%	1.4%	5.0%					0.0%	2.6%	0.0%	2.3%

HOURLY SUMMARY												
HOUR				NB	SB	NB+SB	EB	WB	EB+WB	TOTAL		
6:00 AM	TO	7:00 AM		26	27	53	139	311	450	503		
7:00 AM	TO	8:00 AM		84	82	166	504	728	1232	1398		
8:00 AM	TO	9:00 AM		34	42	76	221	315	536	612		
4:00 PM	TO	5:00 PM		101	47	148	284	284	568	716		
5:00 PM	TO	6:00 PM		177	112	289	565	644	1209	1498		
6:00 PM	TO	7:00 PM		68	61	129	298	275	573	702		
TOTAL VOLUME				490	371	861	2011	2557	4568	5429		
PERCENTAGE				9.0%	6.8%	15.9%	37.0%	47.1%	84.1%	100.0%		

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :

City of Noblesville
SR 32_38 & 19th Street
9/12/2017

DIRECTION OF TRAVEL : NORTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	11	0	11	6	0	6	9	0	9	26	0	26
7:00 AM - 8:00 AM	44	0	44	16	0	16	24	0	24	84	0	84
8:00 AM - 9:00 AM	15	1	16	6	0	6	12	0	12	33	1	34
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	51	0	51	20	0	20	30	0	30	101	0	101
5:00 PM - 6:00 PM	90	0	90	41	0	41	46	0	46	177	0	177
6:00 PM - 7:00 PM	34	0	34	8	0	8	26	0	26	68	0	68
PASSENGER	245 99.6%			97 100.0%			147 100.0%			489 99.8%		
TRUCK	1 0.4%			0 0.0%			0 0.0%			1 0.2%		
BOTH	246 50.2%			97 19.8%			147 30.0%			490 100.0%		

DIRECTION OF TRAVEL : SOUTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	19	0	19	0	0	0	8	0	8	27	0	27
7:00 AM - 8:00 AM	33	1	34	15	1	16	32	0	32	80	2	82
8:00 AM - 9:00 AM	17	1	18	8	0	8	16	0	16	41	1	42
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	17	1	18	12	0	12	17	0	17	46	1	47
5:00 PM - 6:00 PM	49	0	49	33	0	33	30	0	30	112	0	112
6:00 PM - 7:00 PM	29	0	29	15	0	15	17	0	17	61	0	61
PASSENGER	164 98.2%			83 98.8%			120 100.0%			367 98.9%		
TRUCK	3 1.8%			1 1.2%			0 0.0%			4 1.1%		
BOTH	167 45.0%			84 22.6%			120 32.3%			371 100.0%		

DIRECTION OF TRAVEL : EASTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	2	0	2	131	4	135	1	1	2	134	5	139
7:00 AM - 8:00 AM	15	0	15	435	32	467	21	1	22	471	33	504
8:00 AM - 9:00 AM	10	0	10	178	22	200	11	0	11	199	22	221
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	12	1	13	236	11	247	24	0	24	272	12	284
5:00 PM - 6:00 PM	23	0	23	471	18	489	52	1	53	546	19	565
6:00 PM - 7:00 PM	12	0	12	254	17	271	15	0	15	281	17	298
PASSENGER	74 98.7%			1705 94.3%			124 97.6%			1903 94.6%		
TRUCK	1 1.3%			104 5.7%			3 2.4%			108 5.4%		
BOTH	75 3.7%			1809 90.0%			127 6.3%			2011 100.0%		

DIRECTION OF TRAVEL : WESTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	4	0	4	277	15	292	15	0	15	296	15	311
7:00 AM - 8:00 AM	15	0	15	609	37	646	67	0	67	691	37	728
8:00 AM - 9:00 AM	7	0	7	263	15	278	29	1	30	299	16	315
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	15	0	15	237	8	245	24	0	24	276	8	284
5:00 PM - 6:00 PM	24	0	24	552	15	567	53	0	53	629	15	644
6:00 PM - 7:00 PM	12	0	12	234	7	241	22	0	22	268	7	275
PASSENGER	77 100.0%			2172 95.7%			210 99.5%			2459 96.2%		
TRUCK	0 0.0%			97 4.3%			1 0.5%			98 3.8%		
BOTH	77 3.0%			2269 88.7%			211 8.3%			2557 100.0%		

SR 32 & 10th STREET

TRAFFIC VOLUME COUNTS

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :
COUNTED BY :

City of Noblesville
SR 32/38 & 10th Street
9/12/2017
Miovision

	TOTAL VEHICLES (PASSENGER CARS + TRUCKS)											
	AM PEAK HOUR VOLUMES BEGINS 7:15 AM				OFF PEAK HOUR VOLUMES BEGINS				PM PEAK HOUR VOLUMES BEGINS 4:30 PM			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	123	137	34	294					179	345	33	557
SOUTHBOUND	43	208	14	265					53	206	19	278
EASTBOUND	15	419	53	487					34	557	118	709
WESTBOUND	18	533	14	565					34	438	42	514

	PEAK HOUR FACTOR											
	AM PEAK HOUR FACTOR				OFF PEAK HOUR FACTOR				PM PEAK HOUR FACTOR			
	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION
NORTHBOUND	0.89								0.90			
SOUTHBOUND	0.93								0.77			
EASTBOUND	0.89			0.96					0.95			
WESTBOUND	0.90								0.95			

	TRUCK PERCENTAGE											
	AM PEAK HOUR PERCENTAGE				OFF PEAK HOUR PERCENTAGE				PM PEAK HOUR PERCENTAGE			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	8.1%	2.2%	2.9%	4.8%					0.0%	0.0%	0.0%	0.0%
SOUTHBOUND	0.0%	2.9%	14.3%	3.0%					0.0%	0.5%	0.0%	0.4%
EASTBOUND	0.0%	8.8%	3.8%	8.0%					0.0%	3.8%	2.5%	3.4%
WESTBOUND	0.0%	6.2%	7.1%	6.0%					0.0%	3.2%	0.0%	2.7%

HOURLY SUMMARY												
HOUR				NB	SB	NB+SB	EB	WB	EB+WB	TOTAL		
6:00 AM	TO	7:00 AM		60	71	131	132	255	387	518		
7:00 AM	TO	8:00 AM		289	247	536	492	576	1068	1604		
8:00 AM	TO	9:00 AM		127	122	249	208	271	479	728		
4:00 PM	TO	5:00 PM		295	125	420	347	244	591	1011		
5:00 PM	TO	6:00 PM		479	290	769	676	531	1207	1976		
6:00 PM	TO	7:00 PM		209	119	328	320	215	535	863		
TOTAL VOLUME				1459	974	2433	2175	2092	4267	6700		
PERCENTAGE				21.8%	14.5%	36.3%	32.5%	31.2%	63.7%	100.0%		

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :

City of Noblesville
SR 32/38 & 10th Street
9/12/2017

DIRECTION OF TRAVEL : NORTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	28	1	29	19	3	22	9	0	9	56	4	60
7:00 AM - 8:00 AM	104	8	112	140	8	148	27	2	29	271	18	289
8:00 AM - 9:00 AM	52	2	54	60	1	61	12	0	12	124	3	127
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	103	0	103	180	0	180	12	0	12	295	0	295
5:00 PM - 6:00 PM	159	0	159	282	0	282	38	0	38	479	0	479
6:00 PM - 7:00 PM	69	0	69	122	1	123	17	0	17	208	1	209
PASSENGER	515 97.9%			803 98.4%			115 98.3%			1433 98.2%		
TRUCK	11 2.1%			13 1.6%			2 1.7%			26 1.8%		
BOTH	526 36.1%			816 55.9%			117 8.0%			1459 100.0%		

DIRECTION OF TRAVEL : SOUTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	12	0	12	48	6	54	4	1	5	64	7	71
7:00 AM - 8:00 AM	40	0	40	186	5	191	14	2	16	240	7	247
8:00 AM - 9:00 AM	27	0	27	86	2	88	7	0	7	120	2	122
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	26	0	26	90	1	91	8	0	8	124	1	125
5:00 PM - 6:00 PM	55	0	55	206	0	206	28	1	29	289	1	290
6:00 PM - 7:00 PM	24	1	25	84	0	84	10	0	10	118	1	119
PASSENGER	184 99.5%			700 98.0%			71 94.7%			955 98.0%		
TRUCK	1 0.5%			14 2.0%			4 5.3%			19 2.0%		
BOTH	185 19.0%			714 73.3%			75 7.7%			974 100.0%		

DIRECTION OF TRAVEL : EASTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	3	0	3	114	4	118	11	0	11	128	4	132
7:00 AM - 8:00 AM	16	0	16	402	28	430	45	1	46	463	29	492
8:00 AM - 9:00 AM	4	0	4	159	21	180	22	2	24	185	23	208
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	14	0	14	268	11	279	53	1	54	335	12	347
5:00 PM - 6:00 PM	36	0	36	509	18	527	111	2	113	656	20	676
6:00 PM - 7:00 PM	9	0	9	250	21	271	38	2	40	297	23	320
PASSENGER	82 100.0%			1702 94.3%			280 97.2%			2064 94.9%		
TRUCK	0 0.0%			103 5.7%			8 2.8%			111 5.1%		
BOTH	82 3.8%			1805 83.0%			288 13.2%			2175 100.0%		

DIRECTION OF TRAVEL : WESTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	8	0	8	230	15	245	2	0	2	240	15	255
7:00 AM - 8:00 AM	18	0	18	515	28	543	15	0	15	548	28	576
8:00 AM - 9:00 AM	13	0	13	230	21	251	6	1	7	249	22	271
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	18	0	18	202	5	207	19	0	19	239	5	244
5:00 PM - 6:00 PM	30	0	30	453	15	468	33	0	33	516	15	531
6:00 PM - 7:00 PM	10	1	11	188	7	195	9	0	9	207	8	215
PASSENGER	97 99.0%			1818 95.2%			84 98.8%			1999 95.6%		
TRUCK	1 1.0%			91 4.8%			1 1.2%			93 4.4%		
BOTH	98 4.7%			1909 91.3%			85 4.1%			2092 100.0%		

SR 32 & 8TH STREET

TRAFFIC VOLUME COUNTS

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :
COUNTED BY :

City of Noblesville
SR32/38 & 8th Street
9/12/2017
Miovision

	TOTAL VEHICLES (PASSENGER CARS + TRUCKS)											
	AM PEAK HOUR VOLUMES BEGINS 7:15 AM				OFF PEAK HOUR VOLUMES BEGINS 12:30 PM				PM PEAK HOUR VOLUMES BEGINS 4:30 PM			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	222	128	5	355	256	171	13	440	298	271	11	580
SOUTHBOUND	18	201	9	228	36	154	23	213	27	199	25	251
EASTBOUND	9	479	403	891	21	506	398	925	17	664	604	1285
WESTBOUND	5	690	16	711	14	632	65	711	7	711	32	750

	PEAK HOUR FACTOR											
	AM PEAK HOUR FACTOR				OFF PEAK HOUR FACTOR				PM PEAK HOUR FACTOR			
	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION
NORTHBOUND	0.87		0.96		0.90							
SOUTHBOUND	0.92		0.93		0.86							
EASTBOUND	0.97		0.91		0.98							
WESTBOUND	0.93		0.96		0.95							

	TRUCK PERCENTAGE											
	AM PEAK HOUR PERCENTAGE				OFF PEAK HOUR PERCENTAGE				PM PEAK HOUR PERCENTAGE			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	7.2%	0.8%	20.0%	5.1%	8.2%	2.3%	7.7%	5.9%	0.3%	0.0%	0.0%	0.2%
SOUTHBOUND	11.1%	1.0%	0.0%	1.8%	5.6%	1.3%	0.0%	1.9%	3.7%	0.5%	0.0%	0.8%
EASTBOUND	11.1%	7.9%	3.2%	5.8%	0.0%	8.7%	4.8%	6.8%	0.0%	3.8%	1.3%	2.6%
WESTBOUND	20.0%	7.2%	0.0%	7.2%	0.0%	7.9%	1.5%	7.2%	0.0%	2.1%	3.1%	2.1%

HOURLY SUMMARY												
HOUR			NB	SB	NB+SB	EB	WB	EB+WB	TOTAL			
6:00 AM	TO	7:00 AM	201	92	293	511	461	972	1265			
7:00 AM	TO	8:00 AM	346	224	570	869	702	1571	2141			
8:00 AM	TO	9:00 AM	373	231	604	896	659	1555	2159			
10:00 AM	TO	11:00 AM	337	163	500	855	536	1391	1891			
11:00 AM	TO	12:00 PM	368	174	542	858	573	1431	1973			
12:00 PM	TO	1:00 PM	416	208	624	914	674	1588	2212			
1:00 PM	TO	2:00 PM	443	216	659	866	697	1563	2222			
2:00 PM	TO	3:00 PM	480	177	657	933	694	1627	2284			
3:00 PM	TO	4:00 PM	467	229	696	1004	629	1633	2329			
4:00 PM	TO	5:00 PM	563	243	806	1203	725	1928	2734			
5:00 PM	TO	6:00 PM	603	220	823	1241	724	1965	2788			
6:00 PM	TO	7:00 PM	468	159	627	968	597	1565	2192			
TOTAL VOLUME			5065	2336	7401	11118	7671	18789	26190			
PERCENTAGE			19.3%	8.9%	28.3%	42.5%	29.3%	71.7%	100.0%			

CLIENT :
INTERSECTION :
DATE :

City of Noblesville
SR32/38 & 8th Street
9/12/2017

DIRECTION OF TRAVEL : NORTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
AM TIME PERIOD												
6:00 AM - 7:00 AM	150	2	152	45	0	45	3	1	4	198	3	201
7:00 AM - 8:00 AM	209	11	220	117	1	118	8	0	8	334	12	346
8:00 AM - 9:00 AM	209	19	228	136	3	139	5	1	6	350	23	373
OFF TIME PERIOD												
10:00 AM - 11:00 AM	206	10	216	98	7	105	14	2	16	318	19	337
11:00 AM - 12:00 PM	231	12	243	100	2	102	23	0	23	354	14	368
12:00 PM - 1:00 PM	246	8	254	139	3	142	20	0	20	405	11	416
1:00 PM - 2:00 PM	226	28	254	174	4	178	10	1	11	410	33	443
2:00 PM - 3:00 PM	272	9	281	175	5	180	19	0	19	466	14	480
PM TIME PERIOD												
3:00 PM - 4:00 PM	262	7	269	185	3	188	8	2	10	455	12	467
4:00 PM - 5:00 PM	299	3	302	247	1	248	13	0	13	559	4	563
5:00 PM - 6:00 PM	315	4	319	275	0	275	9	0	9	599	4	603
6:00 PM - 7:00 PM	271	4	275	184	0	184	9	0	9	464	4	468
PASSENGER				2896			1875			141		4912
	96.1%						98.5%			95.3%		97.0%
TRUCK				117			29			7		153
	3.9%						1.5%			4.7%		3.0%
BOTH				3013			1904			148		5065
	59.5%						37.6%			2.9%		100.0%

DIRECTION OF TRAVEL : SOUTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
AM TIME PERIOD												
6:00 AM - 7:00 AM	5	0	5	84	0	84	3	0	3	92	0	92
7:00 AM - 8:00 AM	13	2	15	198	1	199	10	0	10	221	3	224
8:00 AM - 9:00 AM	21	1	22	192	3	195	14	0	14	227	4	231
OFF TIME PERIOD												
10:00 AM - 11:00 AM	31	0	31	111	9	120	12	0	12	154	9	163
11:00 AM - 12:00 PM	24	2	26	131	3	134	13	1	14	168	6	174
12:00 PM - 1:00 PM	35	1	36	147	2	149	23	0	23	205	3	208
1:00 PM - 2:00 PM	34	1	35	154	4	158	23	0	23	211	5	216
2:00 PM - 3:00 PM	18	1	19	125	4	129	28	1	29	171	6	177
PM TIME PERIOD												
3:00 PM - 4:00 PM	25	0	25	170	5	175	28	1	29	223	6	229
4:00 PM - 5:00 PM	24	3	27	193	1	194	22	0	22	239	4	243
5:00 PM - 6:00 PM	20	0	20	186	1	187	13	0	13	219	1	220
6:00 PM - 7:00 PM	20	1	21	133	1	134	4	0	4	157	2	159
PASSENGER				270			1824			193		2287
	95.7%						98.2%			98.5%		97.9%
TRUCK				12			34			3		49
	4.3%						1.8%			1.5%		2.1%
BOTH				282			1858			196		2336
	12.1%						79.5%			8.4%		100.0%

DIRECTION OF TRAVEL : EASTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
AM TIME PERIOD												
6:00 AM - 7:00 AM	1	0	1	222	11	233	273	4	277	496	15	511
7:00 AM - 8:00 AM	8	1	9	450	28	478	370	12	382	828	41	869
8:00 AM - 9:00 AM	20	0	20	392	45	437	432	7	439	844	52	896
OFF TIME PERIOD												
10:00 AM - 11:00 AM	18	0	18	449	47	496	329	12	341	796	59	855
11:00 AM - 12:00 PM	16	1	17	433	45	478	351	12	363	800	58	858
12:00 PM - 1:00 PM	28	0	28	467	36	503	378	5	383	873	41	914
1:00 PM - 2:00 PM	13	0	13	427	53	480	351	22	373	791	75	866
2:00 PM - 3:00 PM	15	0	15	473	54	527	371	20	391	859	74	933
PM TIME PERIOD												
3:00 PM - 4:00 PM	17	0	17	495	38	533	441	13	454	953	51	1004
4:00 PM - 5:00 PM	17	0	17	608	26	634	541	11	552	1166	37	1203
5:00 PM - 6:00 PM	16	0	16	624	21	645	574	6	580	1214	27	1241
6:00 PM - 7:00 PM	14	0	14	534	26	560	391	3	394	939	29	968
PASSENGER				183			5574			4802		10559
	98.9%						92.8%			97.4%		95.0%
TRUCK				2			430			127		559
	1.1%						7.2%			2.6%		5.0%
BOTH				185			6004			4929		11118
	1.7%						54.0%			44.3%		100.0%

DIRECTION OF TRAVEL : WESTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
AM TIME PERIOD												
6:00 AM - 7:00 AM	4	0	4	428	26	454	3	0	3	435	26	461
7:00 AM - 8:00 AM	4	1	5	644	38	682	15	0	15	663	39	702
8:00 AM - 9:00 AM	3	0	3	575	54	629	27	0	27	605	54	659
OFF TIME PERIOD												
10:00 AM - 11:00 AM	9	1	10	456	42	498	28	0	28	493	43	536
11:00 AM - 12:00 PM	7	1	8	502	40	542	23	0	23	532	41	573
12:00 PM - 1:00 PM	15	0	15	548	41	589	70	0	70	633	41	674
1:00 PM - 2:00 PM	10	2	12	584	47	631	53	1	54	647	50	697
2:00 PM - 3:00 PM	11	0	11	601	46	647	36	0	36	648	46	694
PM TIME PERIOD												
3:00 PM - 4:00 PM	6	2	8	545	35	580	41	0	41	592	37	629
4:00 PM - 5:00 PM	10	0	10	660	19	679	36	0	36	706	19	725
5:00 PM - 6:00 PM	7	0	7	680	15	695	21	1	22	708	16	724
6:00 PM - 7:00 PM	2	0	2	558	8	566	29	0	29	589	8	597
PASSENGER				88			6781			382		7251
	92.6%						94.3%			99.5%		94.5%
TRUCK				7			411			2		420
	7.4%						5.7%			0.5%		5.5%
BOTH				95			7192			384		7671
	1.2%						93.8%			5.0%		100.0%

SR 32 & HIGHWAY 19

TRAFFIC VOLUME COUNTS

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :
COUNTED BY :

City of Noblesville
SR32/38 & HWY 19
9/12/2017
Miovision

	TOTAL VEHICLES (PASSENGER CARS + TRUCKS)											
	AM PEAK HOUR VOLUMES BEGINS 7:00 AM				OFF PEAK HOUR VOLUMES BEGINS 2:00 PM				PM PEAK HOUR VOLUMES BEGINS 4:30 PM			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
SOUTHBOUND	140		245	385	47		116	163	57		118	175
EASTBOUND	157		834	991	134		914	1048	243		1208	1451
WESTBOUND		858	30	888		897	47	944		1009	48	1057

	PEAK HOUR FACTOR					
	AM PEAK HOUR FACTOR			OFF PEAK HOUR FACTOR		PM PEAK HOUR FACTOR
	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION
SOUTHBOUND	0.88		0.91		0.88	
EASTBOUND	0.90	0.95	0.98	0.97	0.98	
WESTBOUND	0.88		0.96		0.91	0.96

	TRUCK PERCENTAGE											
	AM PEAK HOUR PERCENTAGE				OFF PEAK HOUR PERCENTAGE				PM PEAK HOUR PERCENTAGE			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
SOUTHBOUND	1.4%		5.3%	3.9%	0.0%		13.8%	9.8%	1.8%		2.5%	2.3%
EASTBOUND	7.6%	5.2%	5.5%	5.2%	7.9%		7.5%	7.5%	1.2%	3.1%	1.4%	2.8%
WESTBOUND	5.6%	13.3%	5.9%		6.7%	0.0%	6.4%		0.0%	0.0%		1.3%

HOURLY SUMMARY												
HOUR			NB	SB	NB+SB	EB	WB	EB+WB	TOTAL			
6:00 AM	TO	7:00 AM		182	182	549	608	1157	1339			
7:00 AM	TO	8:00 AM		385	385	991	888	1879	2264			
8:00 AM	TO	9:00 AM		287	287	924	857	1781	2068			
10:00 AM	TO	11:00 AM		137	137	844	724	1568	1705			
11:00 AM	TO	12:00 PM		147	147	934	792	1726	1873			
12:00 PM	TO	1:00 PM		167	167	959	854	1813	1980			
1:00 PM	TO	2:00 PM		171	171	909	903	1812	1983			
2:00 PM	TO	3:00 PM		163	163	1048	944	1992	2155			
3:00 PM	TO	4:00 PM		173	173	1121	884	2005	2178			
4:00 PM	TO	5:00 PM		176	176	1395	1029	2424	2600			
5:00 PM	TO	6:00 PM		171	171	1408	1012	2420	2591			
6:00 PM	TO	7:00 PM		148	148	1104	836	1940	2088			
TOTAL VOLUME				2307	2307	12186	10331	22517	24824			
PERCENTAGE				9.3%	9.3%	49.1%	41.6%	90.7%	100.0%			

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :

City of Noblesville
SR32/38 & HWY 19
9/12/2017

DIRECTION OF TRAVEL : SOUTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	54	0	54				115	13	128	169	13	182
7:00 AM - 8:00 AM	138	2	140				232	13	245	370	15	385
8:00 AM - 9:00 AM	100	6	106				170	11	181	270	17	287
OFF TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
10:00 AM - 11:00 AM	70	4	74				55	8	63	125	12	137
11:00 AM - 12:00 PM	59	4	63				79	5	84	138	9	147
12:00 PM - 1:00 PM	77	4	81				78	8	86	155	12	167
1:00 PM - 2:00 PM	69	7	76				88	7	95	157	14	171
2:00 PM - 3:00 PM	47	0	47				100	16	116	147	16	163
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
3:00 PM - 4:00 PM	67	1	68				95	10	105	162	11	173
4:00 PM - 5:00 PM	59	1	60				111	5	116	170	6	176
5:00 PM - 6:00 PM	51	1	52				117	2	119	168	3	171
6:00 PM - 7:00 PM	63	1	64				84	0	84	147	1	148
PASSENGER	854						1324			2178		
	96.5%						93.1%			94.4%		
TRUCK	31						98			129		
	3.5%						6.9%			5.6%		
BOTH	885						1422			2307		
	38.4%						61.6%			100.0%		

DIRECTION OF TRAVEL : EASTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	70	2	72	464	13	477				534	15	549
7:00 AM - 8:00 AM	145	12	157	791	43	834				936	55	991
8:00 AM - 9:00 AM	82	35	117	757	50	807				839	85	924
OFF TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
10:00 AM - 11:00 AM	80	7	87	708	49	757				788	56	844
11:00 AM - 12:00 PM	96	8	104	775	55	830				871	63	934
12:00 PM - 1:00 PM	104	12	116	806	37	843				910	49	959
1:00 PM - 2:00 PM	100	4	104	730	75	805				830	79	909
2:00 PM - 3:00 PM	127	7	134	842	72	914				969	79	1048
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
3:00 PM - 4:00 PM	158	10	168	907	46	953				1065	56	1121
4:00 PM - 5:00 PM	222	12	234	1122	39	1161				1344	51	1395
5:00 PM - 6:00 PM	222	4	226	1152	30	1182				1374	34	1408
6:00 PM - 7:00 PM	190	1	191	881	32	913				1071	33	1104
PASSENGER	1596			9935						11531		
	93.3%			94.8%						94.6%		
TRUCK	114			541						655		
	6.7%			5.2%						5.4%		
BOTH	1710			10476						12186		
	14.0%			86.0%						100.0%		

DIRECTION OF TRAVEL : WESTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM				567	24	591	15	2	17	582	26	608
7:00 AM - 8:00 AM				810	48	858	26	4	30	836	52	888
8:00 AM - 9:00 AM				772	65	837	19	1	20	791	66	857
OFF TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
10:00 AM - 11:00 AM				639	46	685	35	4	39	674	50	724
11:00 AM - 12:00 PM				717	49	766	24	2	26	741	51	792
12:00 PM - 1:00 PM				758	47	805	44	5	49	802	52	854
1:00 PM - 2:00 PM				791	75	866	36	1	37	827	76	903
2:00 PM - 3:00 PM				837	60	897	47	0	47	884	60	944
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
3:00 PM - 4:00 PM				796	44	840	44	0	44	840	44	884
4:00 PM - 5:00 PM				951	19	970	58	1	59	1009	20	1029
5:00 PM - 6:00 PM				953	18	971	41	0	41	994	18	1012
6:00 PM - 7:00 PM				784	13	797	38	1	39	822	14	836
PASSENGER				9375			427			9802		
	94.9%			95.3%						94.9%		
TRUCK				508			21			529		
	5.1%			4.7%						5.1%		
BOTH				9883			448			10331		
	95.7%			4.3%						100.0%		

SR 32 & SR 38

TRAFFIC VOLUME COUNTS

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :
COUNTED BY :

City of Noblesville
SR 32 & SR 38
9/6/2017
Miovision

	TOTAL VEHICLES (PASSENGER CARS + TRUCKS)											
	AM PEAK HOUR VOLUMES BEGINS 7:00 AM				OFF PEAK HOUR VOLUMES BEGINS				PM PEAK HOUR VOLUMES BEGINS 4:30 PM			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	19	16	8	43					37	36	38	111
SOUTHBOUND	336	37	81	454					418	21	86	525
EASTBOUND	21	665	39	725					88	946	17	1051
WESTBOUND	29	695	271	995					22	687	394	1103

	PEAK HOUR FACTOR											
	AM PEAK HOUR FACTOR				OFF PEAK HOUR FACTOR				PM PEAK HOUR FACTOR			
	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION
NORTHBOUND	0.77								0.73			
SOUTHBOUND	0.95								0.91			
EASTBOUND	0.83		0.98						0.94			
WESTBOUND	0.93								0.96			0.98

	TRUCK PERCENTAGE											
	AM PEAK HOUR PERCENTAGE				OFF PEAK HOUR PERCENTAGE				PM PEAK HOUR PERCENTAGE			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	5.3%	0.0%	0.0%	2.3%					0.0%	2.8%	0.0%	0.9%
SOUTHBOUND	4.5%	0.0%	3.7%	4.0%					3.8%	4.8%	0.0%	3.2%
EASTBOUND	14.3%	6.8%	5.1%	6.9%					2.3%	1.4%	0.0%	1.4%
WESTBOUND	0.0%	6.2%	4.8%	5.6%					0.0%	1.9%	1.5%	1.7%

HOURLY SUMMARY											
HOUR				NB	SB	NB+SB	EB	WB	EB+WB	TOTAL	
6:00 AM	TO	7:00 AM		9	192	201	203	413	616	817	
7:00 AM	TO	8:00 AM		43	454	497	725	995	1720	2217	
8:00 AM	TO	9:00 AM		19	223	242	306	478	784	1026	
4:00 PM	TO	5:00 PM		60	284	344	500	530	1030	1374	
5:00 PM	TO	6:00 PM		92	483	575	1073	1095	2168	2743	
6:00 PM	TO	7:00 PM		45	213	258	485	438	923	1181	
TOTAL VOLUME				268	1849	2117	3292	3949	7241	9358	
PERCENTAGE				2.9%	19.8%	22.6%	35.2%	42.2%	77.4%	100.0%	

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :

City of Noblesville
SR 32 & SR 38
9/6/2017

DIRECTION OF TRAVEL : NORTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	5	0	5	1	0	1	3	0	3	9	0	9
7:00 AM - 8:00 AM	18	1	19	16	0	16	8	0	8	42	1	43
8:00 AM - 9:00 AM	9	2	11	2	0	2	6	0	6	17	2	19
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	17	0	17	20	1	21	22	0	22	59	1	60
5:00 PM - 6:00 PM	39	0	39	27	0	27	26	0	26	92	0	92
6:00 PM - 7:00 PM	20	0	20	8	1	9	16	0	16	44	1	45
PASSENGER	108 97.3%			74 97.4%			81 100.0%			263 98.1%		
TRUCK	3 2.7%			2 2.6%			0 0.0%			5 1.9%		
BOTH	111 41.4%			76 28.4%			81 30.2%			268 100.0%		

DIRECTION OF TRAVEL : SOUTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	138	3	141	26	0	26	25	0	25	189	3	192
7:00 AM - 8:00 AM	321	15	336	37	0	37	78	3	81	436	18	454
8:00 AM - 9:00 AM	156	9	165	22	0	22	34	2	36	212	11	223
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	211	8	219	11	1	12	53	0	53	275	9	284
5:00 PM - 6:00 PM	378	10	388	16	1	17	78	0	78	472	11	483
6:00 PM - 7:00 PM	163	8	171	3	0	3	39	0	39	205	8	213
PASSENGER	1367 96.3%			115 98.3%			307 98.4%			1789 96.8%		
TRUCK	53 3.7%			2 1.7%			5 1.6%			60 3.2%		
BOTH	1420 76.8%			117 6.3%			312 16.9%			1849 100.0%		

DIRECTION OF TRAVEL : EASTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	0	1	1	176	6	182	20	0	20	196	7	203
7:00 AM - 8:00 AM	18	3	21	620	45	665	37	2	39	675	50	725
8:00 AM - 9:00 AM	16	1	17	247	21	268	21	0	21	284	22	306
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	44	1	45	443	6	449	6	0	6	493	7	500
5:00 PM - 6:00 PM	84	1	85	951	18	969	19	0	19	1054	19	1073
6:00 PM - 7:00 PM	51	0	51	420	13	433	1	0	1	472	13	485
PASSENGER	213 96.8%			2857 96.3%			104 98.1%			3174 96.4%		
TRUCK	7 3.2%			109 3.7%			2 1.9%			118 3.6%		
BOTH	220 6.7%			2966 90.1%			106 3.2%			3292 100.0%		

DIRECTION OF TRAVEL : WESTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	9	0	9	291	16	307	88	9	97	388	25	413
7:00 AM - 8:00 AM	29	0	29	652	43	695	258	13	271	939	56	995
8:00 AM - 9:00 AM	20	1	21	311	30	341	103	13	116	434	44	478
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	9	0	9	316	7	323	194	4	198	519	11	530
5:00 PM - 6:00 PM	19	0	19	687	18	705	364	7	371	1070	25	1095
6:00 PM - 7:00 PM	1	0	1	287	4	291	142	4	146	430	8	438
PASSENGER	87 98.9%			2544 95.6%			1149 95.8%			3780 95.7%		
TRUCK	1 1.1%			118 4.4%			50 4.2%			169 4.3%		
BOTH	88 2.2%			2662 67.4%			1199 30.4%			3949 100.0%		

SR 32 & RIVER ROAD

TRAFFIC VOLUME COUNTS

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :
COUNTED BY :

City of Noblesville
SR 32 & River Road
9/6/2017
Miovision

	TOTAL VEHICLES (PASSENGER CARS + TRUCKS)											
	AM PEAK HOUR VOLUMES BEGINS 7:00 AM				OFF PEAK HOUR VOLUMES BEGINS 2:00 PM				PM PEAK HOUR VOLUMES BEGINS 4:30 PM			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	77	71	99	247	125	97	103	325	140	134	187	461
SOUTHBOUND	12	130	69	211	43	104	61	208	62	140	103	305
EASTBOUND	20	638	56	714	51	594	71	716	72	699	57	828
WESTBOUND	91	688	28	807	89	606	39	734	119	657	23	799

	PEAK HOUR FACTOR											
	AM PEAK HOUR FACTOR				OFF PEAK HOUR FACTOR				PM PEAK HOUR FACTOR			
	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION
NORTHBOUND	0.87		0.90		0.92							
SOUTHBOUND	0.74	0.94	0.96	0.92	0.89	0.94						
EASTBOUND	0.94		0.92		0.94							
WESTBOUND	0.94		0.88		0.98							

	TRUCK PERCENTAGE											
	AM PEAK HOUR PERCENTAGE				OFF PEAK HOUR PERCENTAGE				PM PEAK HOUR PERCENTAGE			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	20.8%	11.3%	13.1%	15.0%	21.6%	12.4%	5.8%	13.8%	5.7%	5.2%	2.1%	4.1%
SOUTHBOUND	0.0%	6.2%	2.9%	4.7%	0.0%	15.4%	3.3%	8.7%	0.0%	7.1%	0.0%	3.3%
EASTBOUND	0.0%	3.6%	17.9%	4.6%	3.9%	6.4%	42.3%	9.8%	0.0%	2.7%	15.8%	3.4%
WESTBOUND	4.4%	5.8%	3.6%	5.6%	9.0%	7.3%	5.1%	7.4%	3.4%	2.4%	4.3%	2.6%

HOURLY SUMMARY												
HOUR			NB	SB	NB+SB	EB	WB	EB+WB	TOTAL			
6:00 AM	TO	7:00 AM	108	128	236	295	492	787	1023			
7:00 AM	TO	8:00 AM	247	211	458	714	807	1521	1979			
8:00 AM	TO	9:00 AM	227	228	455	661	684	1345	1800			
10:00 AM	TO	11:00 AM	237	152	389	564	568	1132	1521			
11:00 AM	TO	12:00 PM	286	199	485	638	577	1215	1700			
12:00 PM	TO	1:00 PM	314	191	505	654	687	1341	1846			
1:00 PM	TO	2:00 PM	289	207	496	719	677	1396	1892			
2:00 PM	TO	3:00 PM	325	208	533	716	734	1450	1983			
3:00 PM	TO	4:00 PM	389	248	637	749	705	1454	2091			
4:00 PM	TO	5:00 PM	412	265	677	807	780	1587	2264			
5:00 PM	TO	6:00 PM	474	288	762	824	789	1613	2375			
6:00 PM	TO	7:00 PM	304	204	508	809	598	1407	1915			
TOTAL VOLUME			3612	2529	6141	8150	8098	16248	22389			
PERCENTAGE			16.1%	11.3%	27.4%	36.4%	36.2%	72.6%	100.0%			

CLIENT :
INTERSECTION :
DATE :

City of Noblesville
SR 32 & River Road
9/6/2017

DIRECTION OF TRAVEL : NORTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	33	4	37	15	2	17	53	1	54	101	7	108
7:00 AM - 8:00 AM	61	16	77	63	8	71	86	13	99	210	37	247
8:00 AM - 9:00 AM	49	21	70	60	13	73	77	7	84	186	41	227
OFF TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
10:00 AM - 11:00 AM	35	23	58	57	14	71	99	9	108	191	46	237
11:00 AM - 12:00 PM	78	24	102	66	18	84	93	7	100	237	49	286
12:00 PM - 1:00 PM	79	38	117	83	10	93	95	9	104	257	57	314
1:00 PM - 2:00 PM	73	33	106	71	10	81	95	7	102	239	50	289
2:00 PM - 3:00 PM	98	27	125	85	12	97	97	6	103	280	45	325
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
3:00 PM - 4:00 PM	99	34	133	111	10	121	121	14	135	331	58	389
4:00 PM - 5:00 PM	123	13	136	119	5	124	146	6	152	388	24	412
5:00 PM - 6:00 PM	136	6	142	133	6	139	189	4	193	458	16	474
6:00 PM - 7:00 PM	106	5	111	75	3	78	109	6	115	290	14	304
PASSENGER	970			938			1260			3168		
	79.9%			89.4%			93.4%			87.7%		
TRUCK	244			111			89			444		
	20.1%			10.6%			6.6%			12.3%		
BOTH	1214			1049			1349			3612		
	33.6%			29.0%			37.3%			100.0%		

DIRECTION OF TRAVEL : SOUTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	11	1	85	1	86	28	2	30	124	4	128	
7:00 AM - 8:00 AM	12	0	12	8	130	67	2	69	201	10	211	
8:00 AM - 9:00 AM	20	2	22	123	12	135	70	1	71	213	15	228
OFF TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
10:00 AM - 11:00 AM	36	1	37	60	10	70	44	1	45	140	12	152
11:00 AM - 12:00 PM	68	1	69	63	14	77	52	1	53	183	16	199
12:00 PM - 1:00 PM	50	3	53	57	16	73	64	1	65	171	20	191
1:00 PM - 2:00 PM	45	3	48	90	8	98	61	0	61	196	11	207
2:00 PM - 3:00 PM	43	0	43	88	16	104	59	2	61	190	18	208
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
3:00 PM - 4:00 PM	47	0	47	108	14	122	77	2	79	232	16	248
4:00 PM - 5:00 PM	59	0	59	112	10	122	82	2	84	253	12	265
5:00 PM - 6:00 PM	52	0	52	121	12	133	102	1	103	275	13	288
6:00 PM - 7:00 PM	43	0	43	90	8	98	63	0	63	196	8	204
PASSENGER	486			1119			769			2374		
	97.8%			89.7%			98.1%			93.9%		
TRUCK	11			129			15			155		
	2.2%			10.3%			1.9%			6.1%		
BOTH	497			1248			784			2529		
	19.7%			49.3%			31.0%			100.0%		

DIRECTION OF TRAVEL : EASTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	3	0	3	256	13	269	20	3	23	279	16	295
7:00 AM - 8:00 AM	20	0	20	615	23	638	46	10	56	681	33	714
8:00 AM - 9:00 AM	42	2	44	499	53	552	46	19	65	587	74	661
OFF TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
10:00 AM - 11:00 AM	27	1	28	438	39	477	38	21	59	503	61	564
11:00 AM - 12:00 PM	33	0	33	524	27	551	29	25	54	586	52	638
12:00 PM - 1:00 PM	42	0	42	495	45	540	39	33	72	576	78	654
1:00 PM - 2:00 PM	54	1	55	553	40	593	43	28	71	650	69	719
2:00 PM - 3:00 PM	49	2	51	556	38	594	41	30	71	646	70	716
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
3:00 PM - 4:00 PM	43	3	46	613	27	640	38	25	63	694	55	749
4:00 PM - 5:00 PM	67	2	69	636	33	669	53	16	69	756	51	807
5:00 PM - 6:00 PM	50	0	50	707	13	720	50	4	54	807	17	824
6:00 PM - 7:00 PM	41	0	41	711	11	722	44	2	46	796	13	809
PASSENGER	471			6603			487			7561		
	97.7%			94.8%			69.3%			92.8%		
TRUCK	11			362			216			589		
	2.3%			5.2%			30.7%			7.2%		
BOTH	482			6965			703			8150		
	5.9%			85.5%			8.6%			100.0%		

DIRECTION OF TRAVEL : WESTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	48	4	52	417	17	434	5	1	6	470	22	492
7:00 AM - 8:00 AM	87	4	91	648	40	688	27	1	28	762	45	807
8:00 AM - 9:00 AM	62	8	70	554	33	587	25	2	27	641	43	684
OFF TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
10:00 AM - 11:00 AM	66	12	78	421	30	451	39	0	39	526	42	568
11:00 AM - 12:00 PM	71	7	78	428	29	457	40	2	42	539	38	577
12:00 PM - 1:00 PM	95	5	100	485	55	540	43	4	47	623	64	687
1:00 PM - 2:00 PM	75	8	83	520	35	555	38	1	39	633	44	677
2:00 PM - 3:00 PM	81	8	89	562	44	606	37	2	39	680	54	734
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
3:00 PM - 4:00 PM	102	4	106	550	22	572	27	0	27	679	26	705
4:00 PM - 5:00 PM	113	3	116	635	18	653	11	0	11	759	21	780
5:00 PM - 6:00 PM	106	5	111	636	14	650	26	2	28	768	21	789
6:00 PM - 7:00 PM	63	0	63	500	7	507	28	0	28	591	7	598
PASSENGER	969			6356			346			7671		

SR 32 & CHERRY TREE ROAD

TRAFFIC VOLUME COUNTS

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :
COUNTED BY :

City of Noblesville
SR 32 & Cherry Tree Road
9/6/2017
Miovision

	TOTAL VEHICLES (PASSENGER CARS + TRUCKS)											
	AM PEAK HOUR VOLUMES BEGINS 7:00 AM				OFF PEAK HOUR VOLUMES BEGINS 2:00 PM				PM PEAK HOUR VOLUMES BEGINS 5:00 PM			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	4		78	82	5		62	67	3		102	105
EASTBOUND		662	6	668		673	8	681		803	12	815
WESTBOUND	24		816	840	49		739	788	79		850	929

	PEAK HOUR FACTOR					
	AM PEAK HOUR FACTOR			OFF PEAK HOUR FACTOR		PM PEAK HOUR FACTOR
	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION
NORTHBOUND	0.73		0.73		0.94	
EASTBOUND	0.93	0.98	0.89	0.85	0.95	
WESTBOUND	0.94		0.84		0.94	0.98

	TRUCK PERCENTAGE											
	AM PEAK HOUR PERCENTAGE				OFF PEAK HOUR PERCENTAGE				PM PEAK HOUR PERCENTAGE			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	0.0%		2.6%	12.2%	0.0%		1.6%	19.4%	0.0%		0.0%	6.7%
EASTBOUND		5.6%	0.0%	5.5%		9.7%	25.0%	10.1%		1.9%	8.3%	2.0%
WESTBOUND	8.3%		8.8%	8.9%	4.1%		9.9%	9.8%	0.0%		2.8%	2.7%

HOURLY SUMMARY											
HOUR			NB	SB	NB+SB	EB	WB	EB+WB	TOTAL		
6:00 AM	TO	7:00 AM	28		28	313	519	832	860		
7:00 AM	TO	8:00 AM	82		82	668	840	1508	1590		
8:00 AM	TO	9:00 AM	62		62	680	731	1411	1473		
10:00 AM	TO	11:00 AM	42		42	535	537	1072	1114		
11:00 AM	TO	12:00 PM	59		59	598	610	1208	1267		
12:00 PM	TO	1:00 PM	54		54	612	689	1301	1355		
1:00 PM	TO	2:00 PM	68		68	680	724	1404	1472		
2:00 PM	TO	3:00 PM	67		67	681	788	1469	1536		
3:00 PM	TO	4:00 PM	63		63	739	812	1551	1614		
4:00 PM	TO	5:00 PM	93		93	785	873	1658	1751		
5:00 PM	TO	6:00 PM	105		105	815	929	1744	1849		
6:00 PM	TO	7:00 PM	113		113	724	676	1400	1513		
TOTAL VOLUME			836		836	7830	8728	16558	17394		
PERCENTAGE			4.8%		4.8%	45.0%	50.2%	95.2%	100.0%		

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :

City of Noblesville
SR 32 & Cherry Tree Road
9/6/2017

DIRECTION OF TRAVEL : NORTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	0	0	0				28	0	28	28	0	28
7:00 AM - 8:00 AM	4	0	4				76	2	78	80	2	82
8:00 AM - 9:00 AM	3	0	3				58	1	59	61	1	62
OFF TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
10:00 AM - 11:00 AM	4	0	4				37	1	38	41	1	42
11:00 AM - 12:00 PM	3	0	3				56	0	56	59	0	59
12:00 PM - 1:00 PM	4	0	4				44	6	50	48	6	54
1:00 PM - 2:00 PM	5	0	5				60	3	63	65	3	68
2:00 PM - 3:00 PM	5	0	5				61	1	62	66	1	67
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
3:00 PM - 4:00 PM	2	1	3				56	4	60	58	5	63
4:00 PM - 5:00 PM	5	0	5				84	4	88	89	4	93
5:00 PM - 6:00 PM	3	0	3				102	0	102	105	0	105
6:00 PM - 7:00 PM	11	0	11				102	0	102	113	0	113
PASSENGER	49						764			813		
	98.0%						97.2%			97.2%		
TRUCK	1						22			23		
	2.0%						2.8%			2.8%		
BOTH	50						786			836		
	6.0%						94.0%			100.0%		

DIRECTION OF TRAVEL : EASTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM				296	14	310	3	0	3	299	14	313
7:00 AM - 8:00 AM				625	37	662	6	0	6	631	37	668
8:00 AM - 9:00 AM				595	80	675	5	0	5	600	80	680
OFF TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
10:00 AM - 11:00 AM				470	57	527	8	0	8	478	57	535
11:00 AM - 12:00 PM				530	65	595	3	0	3	533	65	598
12:00 PM - 1:00 PM				535	71	606	5	1	6	540	72	612
1:00 PM - 2:00 PM				611	63	674	6	0	6	617	63	680
2:00 PM - 3:00 PM				608	65	673	6	2	8	614	67	681
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
3:00 PM - 4:00 PM				669	64	733	6	0	6	675	64	739
4:00 PM - 5:00 PM				729	38	767	17	1	18	746	39	785
5:00 PM - 6:00 PM				788	15	803	11	1	12	799	16	815
6:00 PM - 7:00 PM				703	9	712	12	0	12	715	9	724
PASSENGER	7159			92.5%			88			7247		
	92.5%						94.6%			92.6%		
TRUCK	578			7.5%			5			583		
							5.4%			7.4%		
BOTH	7737			98.8%			93			7830		
							1.2%			100.0%		

DIRECTION OF TRAVEL : WESTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	15	7	22	476	21	497				491	28	519
7:00 AM - 8:00 AM	22	2	24	744	72	816				766	74	840
8:00 AM - 9:00 AM	29	0	29	636	66	702				665	66	731
OFF TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
10:00 AM - 11:00 AM	29	2	31	452	54	506				481	56	537
11:00 AM - 12:00 PM	32	1	33	525	52	577				557	53	610
12:00 PM - 1:00 PM	31	0	31	564	94	658				595	94	689
1:00 PM - 2:00 PM	52	1	53	604	67	671				656	68	724
2:00 PM - 3:00 PM	47	2	49	666	73	739				713	75	788
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
3:00 PM - 4:00 PM	65	0	65	691	56	747				756	56	812
4:00 PM - 5:00 PM	66	1	67	774	32	806				840	33	873
5:00 PM - 6:00 PM	79	0	79	826	24	850				905	24	929
6:00 PM - 7:00 PM	57	0	57	607	12	619				664	12	676
PASSENGER	524			97.0%			7565			8089		
	97.0%						92.4%			92.7%		
TRUCK	16			3.0%			623			639		
							7.6%			7.3%		
BOTH	540			6.2%			8188			8728		
							93.8%			100.0%		

PLEASANT STREET & SR 37

***TRAFFIC VOLUME COUNTS
CAPACITY ANALYSIS***

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :
COUNTED BY :

City of Noblesville
Pleasant Street & SR 37
9/13/2017
Miovision

	TOTAL VEHICLES (PASSENGER CARS + TRUCKS)											
	AM PEAK HOUR VOLUMES BEGINS 7:00 AM				OFF PEAK HOUR VOLUMES BEGINS				PM PEAK HOUR VOLUMES BEGINS 4:30 PM			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	64	829	61	954					169	878	69	1116
SOUTHBOUND	124	1292	94	1510					253	888	121	1262
EASTBOUND	62	95	42	199					162	294	104	560
WESTBOUND	52	108	120	280					66	244	331	641

	PEAK HOUR FACTOR											
	AM PEAK HOUR FACTOR				OFF PEAK HOUR FACTOR				PM PEAK HOUR FACTOR			
	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION
NORTHBOUND	0.91								0.90			
SOUTHBOUND	0.92								0.93			
EASTBOUND	0.82								0.95			
WESTBOUND	0.90								0.82			
		0.96										1.00

	TRUCK PERCENTAGE											
	AM PEAK HOUR PERCENTAGE				OFF PEAK HOUR PERCENTAGE				PM PEAK HOUR PERCENTAGE			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	1.6%	5.5%	0.0%	4.9%					1.2%	3.2%	1.4%	2.8%
SOUTHBOUND	8.1%	2.8%	5.3%	3.4%					0.4%	3.3%	1.7%	2.5%
EASTBOUND	6.5%	4.2%	2.4%	4.5%					0.0%	0.3%	3.8%	0.9%
WESTBOUND	1.9%	1.9%	3.3%	2.5%					0.0%	0.8%	0.9%	0.8%

HOURLY SUMMARY												
HOUR				NB	SB	NB+SB	EB	WB	EB+WB	TOTAL		
6:00 AM	TO	7:00 AM		315	698	1013	66	87	153	1166		
7:00 AM	TO	8:00 AM		954	1510	2464	199	280	479	2943		
8:00 AM	TO	9:00 AM		341	662	1003	113	151	264	1267		
4:00 PM	TO	5:00 PM		578	645	1223	277	286	563	1786		
5:00 PM	TO	6:00 PM		1103	1211	2314	563	672	1235	3549		
6:00 PM	TO	7:00 PM		696	550	1246	260	296	556	1802		
TOTAL VOLUME				3987	5276	9263	1478	1772	3250	12513		
PERCENTAGE				31.9%	42.2%	74.0%	11.8%	14.2%	26.0%	100.0%		

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :

City of Noblesville
Pleasant Street & SR 37
9/13/2017

DIRECTION OF TRAVEL : NORTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	16	1	17	249	20	269	29	0	29	294	21	315
7:00 AM - 8:00 AM	63	1	64	783	46	829	61	0	61	907	47	954
8:00 AM - 9:00 AM	37	0	37	263	17	280	22	2	24	322	19	341
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	89	2	91	432	20	452	34	1	35	555	23	578
5:00 PM - 6:00 PM	146	0	146	876	14	890	67	0	67	1089	14	1103
6:00 PM - 7:00 PM	82	1	83	557	7	564	49	0	49	688	8	696
PASSENGER	433 98.9%			3160 96.2%			262 98.9%			3855 96.7%		
TRUCK	5 1.1%			124 3.8%			3 1.1%			132 3.3%		
BOTH	438 11.0%			3284 82.4%			265 6.6%			3987 100.0%		

DIRECTION OF TRAVEL : SOUTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	31	2	33	604	30	634	31	0	31	666	32	698
7:00 AM - 8:00 AM	114	10	124	1256	36	1292	89	5	94	1459	51	1510
8:00 AM - 9:00 AM	63	2	65	525	26	551	41	5	46	629	33	662
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	129	0	129	438	15	453	61	2	63	628	17	645
5:00 PM - 6:00 PM	244	1	245	836	26	862	104	0	104	1184	27	1211
6:00 PM - 7:00 PM	117	0	117	379	9	388	45	0	45	541	9	550
PASSENGER	698 97.9%			4038 96.6%			371 96.9%			5107 96.8%		
TRUCK	15 2.1%			142 3.4%			12 3.1%			169 3.2%		
BOTH	713 13.5%			4180 79.2%			383 7.3%			5276 100.0%		

DIRECTION OF TRAVEL : EASTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	19	1	20	31	2	33	12	1	13	62	4	66
7:00 AM - 8:00 AM	58	4	62	91	4	95	41	1	42	190	9	199
8:00 AM - 9:00 AM	22	5	27	54	2	56	29	1	30	105	8	113
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	89	0	89	133	1	134	53	1	54	275	2	277
5:00 PM - 6:00 PM	146	0	146	326	2	328	86	3	89	558	5	563
6:00 PM - 7:00 PM	76	0	76	143	1	144	40	0	40	259	1	260
PASSENGER	410 97.6%			778 98.5%			261 97.4%			1449 98.0%		
TRUCK	10 2.4%			12 1.5%			7 2.6%			29 2.0%		
BOTH	420 28.4%			790 53.5%			268 18.1%			1478 100.0%		

DIRECTION OF TRAVEL : WESTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	16	0	16	40	0	40	31	0	31	87	0	87
7:00 AM - 8:00 AM	51	1	52	106	2	108	116	4	120	273	7	280
8:00 AM - 9:00 AM	19	3	22	67	1	68	56	5	61	142	9	151
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	27	0	27	108	0	108	148	3	151	283	3	286
5:00 PM - 6:00 PM	65	0	65	256	3	259	348	0	348	669	3	672
6:00 PM - 7:00 PM	38	0	38	91	0	91	166	1	167	295	1	296
PASSENGER	216 98.2%			668 99.1%			865 98.5%			1749 98.7%		
TRUCK	4 1.8%			6 0.9%			13 1.5%			23 1.3%		
BOTH	220 12.4%			674 38.0%			878 49.5%			1772 100.0%		

PLEASANT STREET & CLOVER ROAD

TRAFFIC VOLUME COUNTS
CAPACITY ANALYSIS
QUEUE LENGTH ANALYSIS

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :
COUNTED BY :

City of Noblesville
Pleasant Street & Clover Road
9/13/2017
Miovision

	TOTAL VEHICLES (PASSENGER CARS + TRUCKS)											
	AM PEAK HOUR VOLUMES BEGINS 7:30 AM				OFF PEAK HOUR VOLUMES BEGINS				PM PEAK HOUR VOLUMES BEGINS 4:30 PM			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	62	23	52	137					208	113	110	431
SOUTHBOUND	3	6	3	12					46	70	24	140
EASTBOUND	10	173	78	261					66	397	275	738
WESTBOUND	87	206	3	296					156	354	15	525

	PEAK HOUR FACTOR											
	AM PEAK HOUR FACTOR				OFF PEAK HOUR FACTOR				PM PEAK HOUR FACTOR			
	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION
NORTHBOUND	0.93								0.86			
SOUTHBOUND	0.75								0.95			
EASTBOUND	0.89								0.92			
WESTBOUND	0.84								0.91			
		0.88										0.94

	TRUCK PERCENTAGE											
	AM PEAK HOUR PERCENTAGE				OFF PEAK HOUR PERCENTAGE				PM PEAK HOUR PERCENTAGE			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	3.2%	8.7%	3.8%	4.4%					0.0%	0.0%	0.0%	0.0%
SOUTHBOUND	0.0%	0.0%	0.0%	0.0%					0.0%	0.0%	0.0%	0.0%
EASTBOUND	0.0%	8.7%	1.3%	6.1%					0.0%	1.0%	0.0%	0.5%
WESTBOUND	1.1%	3.9%	0.0%	3.0%					0.6%	1.1%	0.0%	1.0%

HOURLY SUMMARY												
HOUR				NB	SB	NB+SB	EB	WB	EB+WB	TOTAL		
6:00 AM	TO	7:00 AM		33	7	40	79	90	169	209		
7:00 AM	TO	8:00 AM		125	9	134	218	274	492	626		
8:00 AM	TO	9:00 AM		64	7	71	145	143	288	359		
4:00 PM	TO	5:00 PM		225	70	295	359	268	627	922		
5:00 PM	TO	6:00 PM		401	129	530	703	483	1186	1716		
6:00 PM	TO	7:00 PM		185	59	244	285	203	488	732		
TOTAL VOLUME				1033	281	1314	1789	1461	3250	4564		
PERCENTAGE				22.6%	6.2%	28.8%	39.2%	32.0%	71.2%	100.0%		

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :

City of Noblesville
Pleasant Street & Clover Road
9/13/2017

DIRECTION OF TRAVEL : NORTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	8	0	8	5	0	5	20	0	20	33	0	33
7:00 AM - 8:00 AM	50	1	51	20	2	22	51	1	52	121	4	125
8:00 AM - 9:00 AM	29	1	30	12	0	12	21	1	22	62	2	64
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	100	0	100	58	0	58	67	0	67	225	0	225
5:00 PM - 6:00 PM	198	0	198	94	0	94	109	0	109	401	0	401
6:00 PM - 7:00 PM	84	0	84	34	0	34	67	0	67	185	0	185
PASSENGER	469			223			335			1027		
	99.6%			99.1%			99.4%			99.4%		
TRUCK	2			0.9%			0.6%			6		
BOTH	471			225			337			1033		
	45.6%			21.8%			32.6%			100.0%		

DIRECTION OF TRAVEL : SOUTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	1	0	1	4	0	4	2	0	2	7	0	7
7:00 AM - 8:00 AM	1	0	1	5	0	5	3	0	3	9	0	9
8:00 AM - 9:00 AM	3	0	3	4	0	4	0	0	0	7	0	7
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	21	0	21	38	0	38	11	0	11	70	0	70
5:00 PM - 6:00 PM	51	0	51	50	0	50	28	0	28	129	0	129
6:00 PM - 7:00 PM	22	0	22	27	0	27	10	0	10	59	0	59
PASSENGER	99			128			54			281		
	100.0%			100.0%			100.0%			100.0%		
TRUCK	0			0.0%			0.0%			0		
BOTH	99			128			54			281		
	35.2%			45.6%			19.2%			100.0%		

DIRECTION OF TRAVEL : EASTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	1	0	1	42	4	46	31	1	32	74	5	79
7:00 AM - 8:00 AM	8	0	8	134	9	143	65	2	67	207	11	218
8:00 AM - 9:00 AM	7	0	7	83	8	91	47	0	47	137	8	145
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	33	0	33	197	1	198	128	0	128	358	1	359
5:00 PM - 6:00 PM	49	0	49	374	5	379	275	0	275	698	5	703
6:00 PM - 7:00 PM	32	0	32	163	1	164	89	0	89	284	1	285
PASSENGER	130			993			635			1758		
	100.0%			97.3%			99.5%			98.3%		
TRUCK	0			28			3			31		
BOTH	130			1021			638			1789		
	7.3%			57.1%			35.7%			100.0%		

DIRECTION OF TRAVEL : WESTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	26	0	26	63	1	64	0	0	0	89	1	90
7:00 AM - 8:00 AM	69	1	70	194	9	203	1	0	1	264	10	274
8:00 AM - 9:00 AM	51	0	51	83	7	90	2	0	2	136	7	143
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	88	1	89	166	2	168	11	0	11	265	3	268
5:00 PM - 6:00 PM	132	0	132	340	2	342	9	0	9	481	2	483
6:00 PM - 7:00 PM	63	0	63	131	1	132	8	0	8	202	1	203
PASSENGER	429			977			31			1437		
	99.5%			97.8%			100.0%			98.4%		
TRUCK	2			22			0			24		
BOTH	431			999			31			1461		
	29.5%			68.4%			2.1%			100.0%		

HCM 6th Signalized Intersection Summary Proposed AM - Conventional Intersection (Signal)
 12: Clover Rd & Pleasant St 10/10/2017

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	20	310	110	100	290	5	80	30	70	5	10	5
Future Volume (veh/h)	20	310	110	100	290	5	80	30	70	5	10	5
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach		No			No			No			No	
Adj Sat Flow, veh/h/ln	1826	1826	1826	1811	1811	1811	1841	1841	1841	1841	1841	1841
Adj Flow Rate, veh/h	22	337	120	109	315	5	87	33	76	5	11	5
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	5	5	5	6	6	6	4	4	4	4	4	4
Cap, veh/h	47	489	415	148	592	502	133	80	185	12	111	51
Arrive On Green	0.03	0.27	0.27	0.09	0.33	0.33	0.08	0.16	0.16	0.01	0.09	0.09
Sat Flow, veh/h	1739	1826	1547	1725	1811	1535	1753	495	1140	1753	1198	545
Grp Volume(v), veh/h	22	337	120	109	315	5	87	0	109	5	0	16
Grp Sat Flow(s), veh/h/ln	1739	1826	1547	1725	1811	1535	1753	0	1635	1753	0	1743
Q Serve(g_s), s	0.5	6.9	2.6	2.6	5.9	0.1	2.0	0.0	2.5	0.1	0.0	0.4
Cycle Q Clear(g_c), s	0.5	6.9	2.6	2.6	5.9	0.1	2.0	0.0	2.5	0.1	0.0	0.4
Prop In Lane	1.00		1.00	1.00		1.00	1.00		0.70	1.00		0.31
Lane Grp Cap(c), veh/h	47	489	415	148	592	502	133	0	265	12	0	162
V/C Ratio(X)	0.47	0.69	0.29	0.74	0.53	0.01	0.65	0.00	0.41	0.42	0.00	0.10
Avail Cap(c_a), veh/h	207	1176	997	494	1469	1245	418	0	1015	209	0	873
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	20.1	13.8	12.2	18.7	11.5	9.5	18.8	0.0	15.8	20.7	0.0	17.4
Incr Delay (d2), s/veh	7.1	1.7	0.4	7.0	0.7	0.0	5.3	0.0	1.0	22.2	0.0	0.3
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	0.3	2.6	0.8	1.2	2.0	0.0	0.9	0.0	0.9	0.1	0.0	0.1
Unsig. Movement Delay, s/veh												
LnGrp Delay(d), s/veh	27.2	15.5	12.6	25.6	12.2	9.5	24.1	0.0	16.8	42.9	0.0	17.7
LnGrp LOS	C	B	B	C	B	A	C	A	B	D	A	B
Approach Vol, veh/h		479			429			196			21	
Approach Delay, s/veh		15.3			15.6			20.0			23.7	
Approach LOS		B			B			C			C	
Timer - Assigned Phs	1	2	3	4	5	6	7	8				
Phs Duration (G+Y+R _c), s	5.3	11.8	8.6	16.2	8.2	8.9	6.1	18.7				
Change Period (Y+R _c), s	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0				
Max Green Setting (Gmax), s	5.0	26.0	12.0	27.0	10.0	21.0	5.0	34.0				
Max Q Clear Time (g_c+l1), s	2.1	4.5	4.6	8.9	4.0	2.4	2.5	7.9				
Green Ext Time (p_c), s	0.0	0.5	0.1	2.3	0.1	0.0	0.0	2.0				
Intersection Summary												
HCM 6th Ctrl Delay			16.4									
HCM 6th LOS			B									

HCM 6th Signalized Intersection Summary Proposed PM - Conventional Intersection (Signal)
 12: Clover Rd & Pleasant St 10/27/2017

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖											
Traffic Volume (veh/h)	80	570	330	190	590	20	250	140	140	60	90	30
Future Volume (veh/h)	80	570	330	190	590	20	250	140	140	60	90	30
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No			No			No			No		
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	87	620	359	207	641	22	272	152	152	65	98	33
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	111	666	565	225	785	665	292	187	187	85	136	46
Arrive On Green	0.06	0.36	0.36	0.13	0.42	0.42	0.16	0.22	0.22	0.05	0.10	0.10
Sat Flow, veh/h	1781	1870	1585	1781	1870	1585	1781	858	858	1781	1339	451
Grp Volume(v), veh/h	87	620	359	207	641	22	272	0	304	65	0	131
Grp Sat Flow(s), veh/h/ln	1781	1870	1585	1781	1870	1585	1781	0	1716	1781	0	1789
Q Serve(g_s), s	3.8	25.3	14.9	9.1	24.0	0.6	12.0	0.0	13.4	2.9	0.0	5.6
Cycle Q Clear(g_c), s	3.8	25.3	14.9	9.1	24.0	0.6	12.0	0.0	13.4	2.9	0.0	5.6
Prop In Lane	1.00		1.00	1.00		1.00	1.00		0.50	1.00		0.25
Lane Grp Cap(c), veh/h	111	666	565	225	785	665	292	0	373	85	0	182
V/C Ratio(X)	0.78	0.93	0.64	0.92	0.82	0.03	0.93	0.00	0.81	0.76	0.00	0.72
Avail Cap(c_a), veh/h	112	684	580	225	802	680	292	0	541	135	0	406
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	36.6	24.6	21.2	34.3	20.3	13.5	32.7	0.0	29.5	37.3	0.0	34.5
Incr Delay (d2), s/veh	28.8	19.1	2.2	39.2	6.5	0.0	35.0	0.0	6.2	12.9	0.0	5.3
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/lr	2.5	14.0	5.6	6.3	11.1	0.2	7.8	0.0	5.9	1.5	0.0	2.7
Unsig. Movement Delay, s/veh												
LnGrp Delay(d), s/veh	65.4	43.7	23.5	73.4	26.8	13.6	67.8	0.0	35.7	50.2	0.0	39.9
LnGrp LOS	E	D	C	E	C	B	E	A	D	D	A	D
Approach Vol, veh/h	1066				870			576			196	
Approach Delay, s/veh	38.7				37.5			50.8			43.3	
Approach LOS	D				D			D			D	
Timer - Assigned Phs	1	2	3	4	5	6	7	8				
Phs Duration (G+Y+Rc), s	8.8	22.2	15.0	33.3	18.0	13.1	10.0	38.3				
Change Period (Y+Rc), s	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0				
Max Green Setting (Gmax), s	25.0	10.0	29.0	13.0	18.0	5.0	34.0					
Max Q Clear Time (g_c+l1), s	15.4	11.1	27.3	14.0	7.6	5.8	26.0					
Green Ext Time (p_c), s	0.0	1.3	0.0	0.9	0.0	0.4	0.0	2.7				
Intersection Summary												
HCM 6th Ctrl Delay		41.2										
HCM 6th LOS		D										

LANE SUMMARY

 Site: 101 [Pleasant Street & Clover Road - AM]

 Network: N101 [Pleasant Street AM Peak - S2A]

New Site
Roundabout

Lane Use and Performance														
	Demand Flows	Arrival Flows			Cap.	Deg. Satn	Lane Util.	Average Delay	Level of Service	95% Back of Queue Veh	Lane Config	Lane Length	Cap. Adj.	Prob. Block.
	Total veh/h	HV %	Total veh/h	HV %	veh/h	v/c	%	sec		Veh	Dist ft	ft	%	%
South: Clover Road														
Lane 1 ^d	196	3.0	196	3.0	1002	0.195	100	5.4	LOS A	0.8	19.6	Full	1600	0.0
Approach	196	3.0	196	3.0		0.195		5.4	LOS A	0.8	19.6			
East: Pleasant Street														
Lane 1	215	3.0	215	3.0	1208	0.178	100	4.5	LOS A	0.8	19.8	Full	616	0.0
Lane 2 ^d	215	3.0	215	3.0	1208	0.178	100	4.5	LOS A	0.8	19.8	Full	616	0.0
Approach	429	3.0	429	3.0		0.178		4.5	LOS A	0.8	19.8			
North: Clover Road														
Lane 1 ^d	22	3.0	22	3.0	881	0.025	100	4.3	LOS A	0.1	2.1	Full	1600	0.0
Approach	22	3.0	22	3.0		0.025		4.3	LOS A	0.1	2.1			
West: Pleasant Street														
Lane 1	239	3.0	239	3.0	1226	0.195	100	4.6	LOS A	0.9	22.2	Full	830	0.0
Lane 2 ^d	239	3.0	239	3.0	1226	0.195	100	4.6	LOS A	0.9	22.2	Full	830	0.0
Approach	478	3.0	478	3.0		0.195		4.6	LOS A	0.9	22.2			
Intersection	1125	3.0	1125	3.0		0.195		4.7	LOS A	0.9	22.2			

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Network Data dialog (Network tab).

Roundabout LOS Method: Same as Signalised Intersections.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

HCM Delay Formula option is used. Control Delay does not include Geometric Delay since Exclude Geometric Delay option applies.

Gap-Accceptance Capacity: Traditional M1.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Largest change in Average Back of Queue or Degree of Saturation for any lane during the last three iterations: 0.1 %

Number of Iterations: 5 (maximum specified: 10)

^d Dominant lane on roundabout approach

LANE SUMMARY

 Site: 101 [Pleasant Street & Clover Road - PM]

 Network: N101 [Pleasant Street PM Peak - S2A]

New Site
Roundabout

Lane Use and Performance															
	Demand Flows	Arrival Flows			Cap.	Deg. Satn	Lane Util.	Average Delay	Level of Service	95% Back of Queue Veh	Lane Config	Lane Length	Cap. Adj.	Prob. Block.	
Total veh/h	Total HV %	Total veh/h	HV %	veh/h	v/c	%	sec			ft		ft	%	%	
South: Clover Road															
Lane 1 ^d	576	3.0	576	3.0	701	0.821	100	28.3	LOS C	7.5	191.2	Full	1600	0.0	0.0
Approach	576	3.0	576	3.0		0.821		28.3	LOS C	7.5	191.2				
East: Pleasant Street															
Lane 1 ^d	442	1.4	442	1.4	868	0.509	100	10.9	LOS B	3.0	76.7	Full	620	0.0	0.0
Lane 2	428	4.6	428	4.6	841	0.509	100	11.2	LOS B	2.9	75.2	Full	620	0.0	0.0
Approach	870	3.0	870	3.0		0.509		11.0	LOS B	3.0	76.7				
North: Clover Road															
Lane 1 ^d	196	3.0	196	3.0	517	0.378	100	13.0	LOS B	1.5	38.3	Full	1600	0.0	0.0
Approach	196	3.0	196	3.0		0.378		13.0	LOS B	1.5	38.3				
West: Pleasant Street															
Lane 1	533	3.0	533	3.0	975	0.546	100	10.8	LOS B	3.6	90.9	Full	821	0.0	0.0
Lane 2 ^d	533	3.0	533	3.0	975	0.546	100	10.8	LOS B	3.6	90.9	Full	821	0.0	0.0
Approach	1065	3.0	1065	3.0		0.546		10.8	LOS B	3.6	90.9				
Intersection	2707	3.0	2707	3.0		0.821		14.8	LOS B	7.5	191.2				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Network Data dialog (Network tab).

Roundabout LOS Method: Same as Signalised Intersections.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

HCM Delay Formula option is used. Control Delay does not include Geometric Delay since Exclude Geometric Delay option applies.

Gap-Acceptance Capacity: Traditional M1.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Largest change in Average Back of Queue or Degree of Saturation for any lane during the last three iterations: 0.1 %

Number of Iterations: 5 (maximum specified: 10)


^d Dominant lane on roundabout approach

Queues

12: Clover Rd & Pleasant St

Proposed AM - Conventional Intersection (Signal)

10/27/2017




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	22	337	120	109	315	5	87	109	5	16
v/c Ratio	0.05	0.48	0.17	0.25	0.30	0.01	0.21	0.24	0.01	0.04
Control Delay	27.6	17.7	0.8	23.4	8.4	0.0	24.1	12.0	27.8	22.5
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	27.6	17.7	0.8	23.4	8.4	0.0	24.1	12.0	27.8	22.5
Queue Length 50th (ft)	5	74	0	25	32	0	20	7	1	3
Queue Length 95th (ft)	32	203	4	93	158	0	80	55	12	22
Internal Link Dist (ft)		741			536			229		538
Turn Bay Length (ft)	100		100	100		100				
Base Capacity (vph)	480	1137	1043	665	1325	1164	622	1031	485	930
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.05	0.30	0.12	0.16	0.24	0.00	0.14	0.11	0.01	0.02

Intersection Summary

Queues
12: Clover Rd & Pleasant St

Proposed PM - Conventional Intersection (Signal)

10/27/2017



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	87	620	359	207	641	22	272	304	65	131
V/c Ratio	0.82	0.96	0.52	0.98	0.84	0.03	0.99	0.65	0.52	0.51
Control Delay	92.1	55.4	12.7	96.4	35.6	0.1	89.8	30.9	54.6	35.8
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	92.1	55.4	12.7	96.4	35.6	0.1	89.8	30.9	54.6	35.8
Queue Length 50th (ft)	46	308	56	109	289	0	142	121	33	56
Queue Length 95th (ft)	#140	#587	152	#266	#552	0	#325	207	#90	108
Internal Link Dist (ft)		741			536			229		538
Turn Bay Length (ft)	100		100	100		100				
Base Capacity (vph)	106	648	685	212	760	768	276	555	127	400
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.82	0.96	0.52	0.98	0.84	0.03	0.99	0.55	0.51	0.33

Intersection Summary

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

QUEUE DISTANCE (%ILE)

Largest 95% Back of Queue Distance for any lane used by vehicle movement (feet)


 Site: 101 [Pleasant Street & Clover Road - AM]

 Network: N101 [Pleasant Street AM Peak - S2A]

New Site
Roundabout

All Movement Classes

	South	East	North	West	Intersection
Vehicle Queue (%ile)	20	20	2	22	22

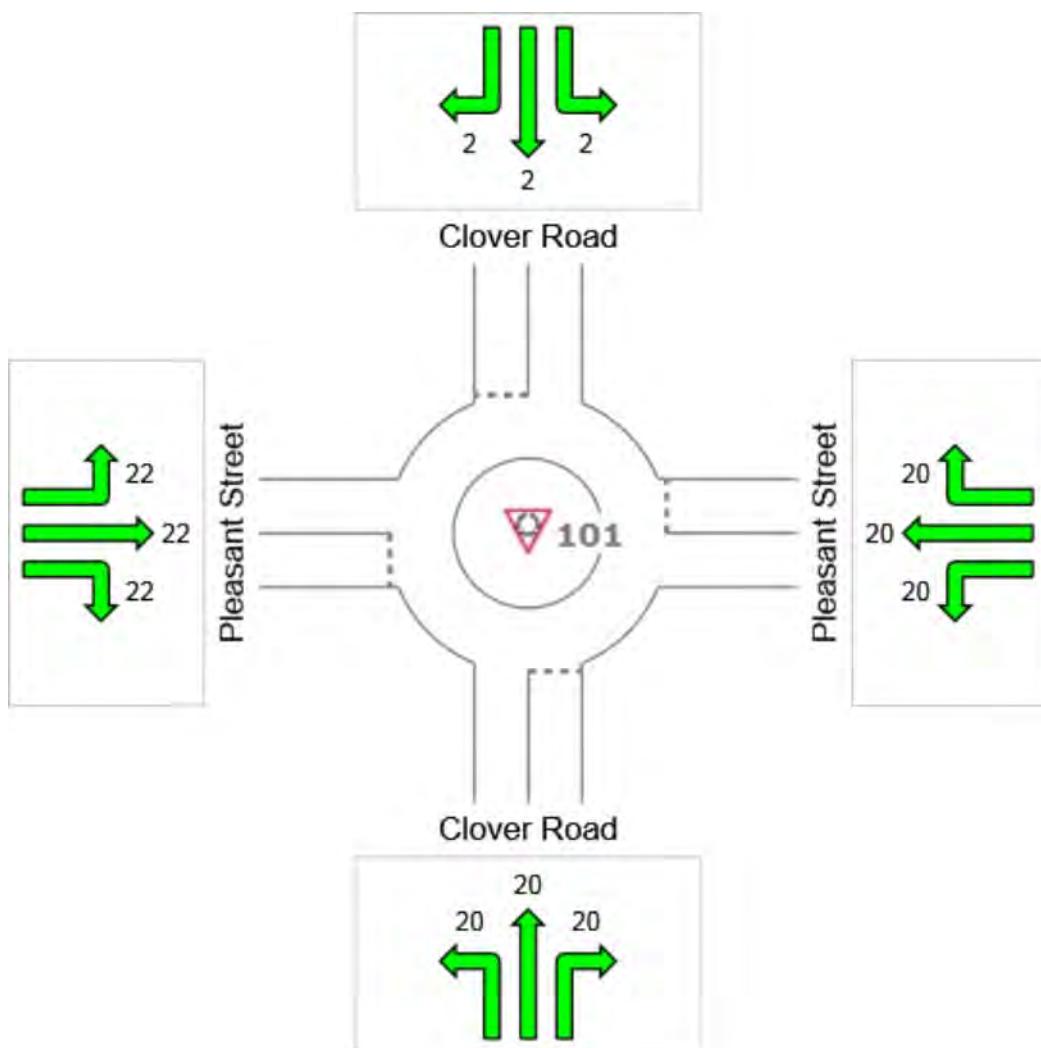

Colour code based on Queue Storage Ratio



QUEUE DISTANCE (%ILE)

Largest 95% Back of Queue Distance for any lane used by vehicle movement (feet)


 Site: 101 [Pleasant Street & Clover Road - PM]

 Network: N101 [Pleasant Street PM Peak - S2A]

New Site
Roundabout

All Movement Classes

	South	East	North	West	Intersection
Vehicle Queue (%ile)	191	77	38	91	191

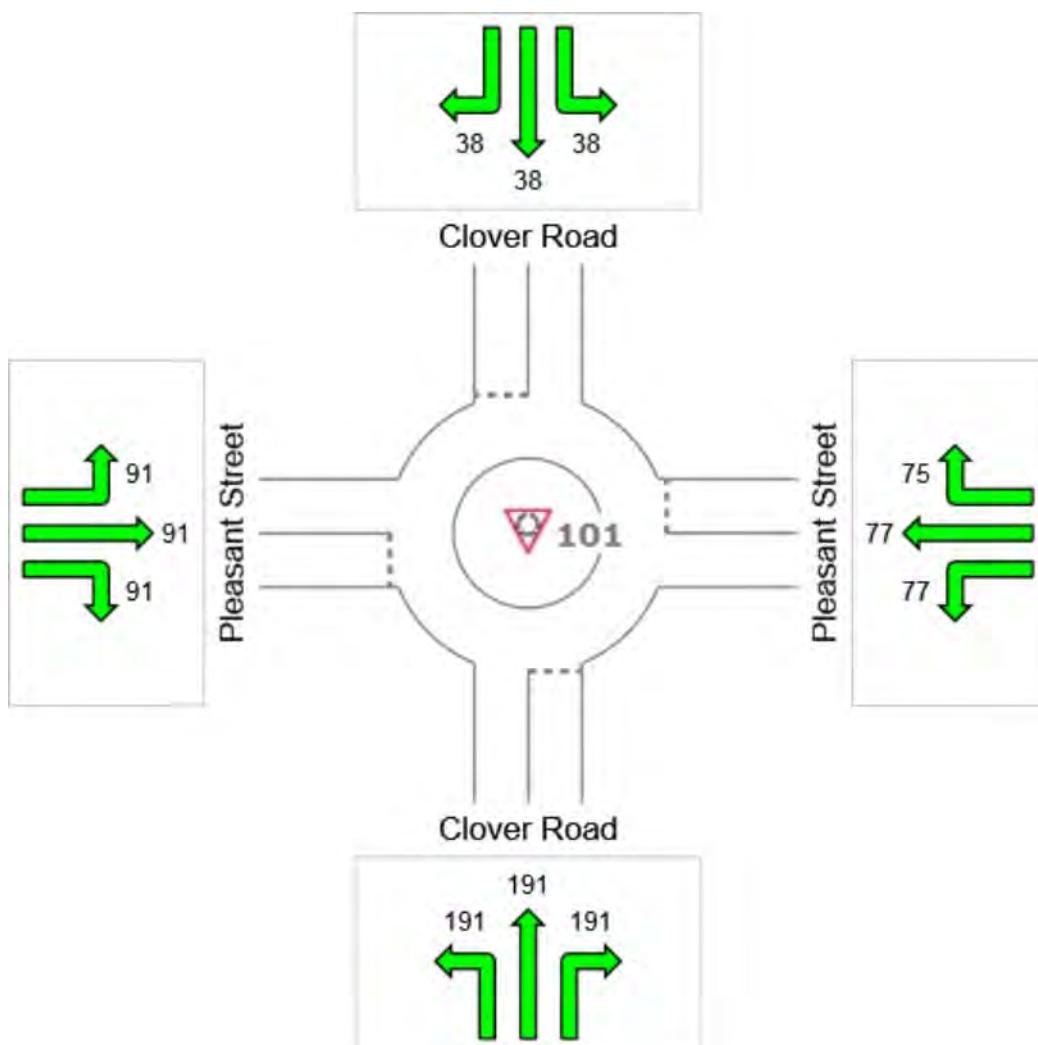

Colour code based on Queue Storage Ratio



PLEASANT STREET & 19TH STREET

TRAFFIC VOLUME COUNTS
CAPACITY ANALYSIS
QUEUE LENGTH ANALYSIS

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :
COUNTED BY :

City of Noblesville
Pleasant Street & 19th Street
9/13/2017
Miovision

	TOTAL VEHICLES (PASSENGER CARS + TRUCKS)											
	AM PEAK HOUR VOLUMES BEGINS 7:30 AM				OFF PEAK HOUR VOLUMES BEGINS				PM PEAK HOUR VOLUMES BEGINS 4:30 PM			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
SOUTHBOUND	26		47	73					80		44	124
EASTBOUND	42		224	266					112		602	714
WESTBOUND		211	76	287					466		199	665

	PEAK HOUR FACTOR											
	AM PEAK HOUR FACTOR				OFF PEAK HOUR FACTOR				PM PEAK HOUR FACTOR			
	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION
SOUTHBOUND	0.68								0.86			
EASTBOUND	0.83		0.87						0.95			
WESTBOUND	0.85								0.93		0.94	

	TRUCK PERCENTAGE											
	AM PEAK HOUR PERCENTAGE				OFF PEAK HOUR PERCENTAGE				PM PEAK HOUR PERCENTAGE			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
SOUTHBOUND	7.7%		10.6%	9.6%					1.3%		0.0%	0.8%
EASTBOUND	0.0%		6.3%	5.3%					0.9%		0.5%	0.6%
WESTBOUND		5.2%	0.0%	3.8%					0.6%		0.0%	0.5%

HOURLY SUMMARY												
HOUR			NB	SB	NB+SB	EB	WB	EB+WB	TOTAL			
6:00 AM	TO	7:00 AM		34	34	65	75	140	174			
7:00 AM	TO	8:00 AM		75	75	251	272	523	598			
8:00 AM	TO	9:00 AM		31	31	148	131	279	310			
4:00 PM	TO	5:00 PM		60	60	347	309	656	716			
5:00 PM	TO	6:00 PM		110	110	701	650	1351	1461			
6:00 PM	TO	7:00 PM		52	52	261	246	507	559			
TOTAL VOLUME				362	362	1773	1683	3456	3818			
PERCENTAGE				9.5%	9.5%	46.4%	44.1%	90.5%	100.0%			

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :

City of Noblesville
Pleasant Street & 19th Street
9/13/2017

DIRECTION OF TRAVEL : SOUTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	17	3	20				14	0	14	31	3	34
7:00 AM - 8:00 AM	24	2	26				46	3	49	70	5	75
8:00 AM - 9:00 AM	14	0	14				15	2	17	29	2	31
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	37	0	37				23	0	23	60	0	60
5:00 PM - 6:00 PM	66	1	67				43	0	43	109	1	110
6:00 PM - 7:00 PM	37	0	37				13	2	15	50	2	52
PASSENGER	195 97.0%						154 95.7%			349 96.4%		
TRUCK	6 3.0%						7 4.3%			13 3.6%		
BOTH	201 55.5%						161 44.5%			362 100.0%		

DIRECTION OF TRAVEL : EASTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	12	1	13	50	2	52				62	3	65
7:00 AM - 8:00 AM	80	1	81	161	9	170				241	10	251
8:00 AM - 9:00 AM	18	0	18	123	7	130				141	7	148
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	52	0	52	294	1	295				346	1	347
5:00 PM - 6:00 PM	113	3	116	580	5	585				693	8	701
6:00 PM - 7:00 PM	31	1	32	229	0	229				260	1	261
PASSENGER	306 98.1%			1437 98.4%						1743 98.3%		
TRUCK	6 1.9%			24 1.6%						30 1.7%		
BOTH	312 17.6%			1461 82.4%						1773 100.0%		

DIRECTION OF TRAVEL : WESTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM				59	0	59	16	0	16	75	0	75
7:00 AM - 8:00 AM				193	10	203	67	2	69	260	12	272
8:00 AM - 9:00 AM				90	8	98	33	0	33	123	8	131
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM				209	2	211	98	0	98	307	2	309
5:00 PM - 6:00 PM				480	2	482	168	0	168	648	2	650
6:00 PM - 7:00 PM				191	1	192	53	1	54	244	2	246
PASSENGER				1222 98.2%			435 99.3%			1657 98.5%		
TRUCK				23 1.8%			3 0.7%			26 1.5%		
BOTH				1245 74.0%			438 26.0%			1683 100.0%		

Intersection

Int Delay, s/veh 2.3

Movement	EBL	EBT	WBT	WBR	SBL	SBR
----------	-----	-----	-----	-----	-----	-----

Lane Configurations						
---------------------	--	--	--	--	--	--

Traffic Vol, veh/h	50	350	300	100	50	90
--------------------	----	-----	-----	-----	----	----

Future Vol, veh/h	50	350	300	100	50	90
-------------------	----	-----	-----	-----	----	----

Conflicting Peds, #/hr	0	0	0	0	0	0
------------------------	---	---	---	---	---	---

Sign Control	Free	Free	Free	Free	Stop	Stop
--------------	------	------	------	------	------	------

RT Channelized	-	None	-	None	-	None
----------------	---	------	---	------	---	------

Storage Length	100	-	-	0	0	100
----------------	-----	---	---	---	---	-----

Veh in Median Storage, #	-	0	0	-	1	-
--------------------------	---	---	---	---	---	---

Grade, %	-	0	0	-	0	-
----------	---	---	---	---	---	---

Peak Hour Factor	92	92	92	92	92	92
------------------	----	----	----	----	----	----

Heavy Vehicles, %	5	5	6	6	4	4
-------------------	---	---	---	---	---	---

Mvmt Flow	54	380	326	109	54	98
-----------	----	-----	-----	-----	----	----

Major/Minor	Major1	Major2	Minor2
-------------	--------	--------	--------

Conflicting Flow All	435	0	-	0	814	326
----------------------	-----	---	---	---	-----	-----

Stage 1	-	-	-	-	326	-
---------	---	---	---	---	-----	---

Stage 2	-	-	-	-	488	-
---------	---	---	---	---	-----	---

Critical Hdwy	4.15	-	-	-	6.44	6.24
---------------	------	---	---	---	------	------

Critical Hdwy Stg 1	-	-	-	-	5.44	-
---------------------	---	---	---	---	------	---

Critical Hdwy Stg 2	-	-	-	-	5.44	-
---------------------	---	---	---	---	------	---

Follow-up Hdwy	2.245	-	-	-	3.536	3.336
----------------	-------	---	---	---	-------	-------

Pot Cap-1 Maneuver	1109	-	-	-	345	711
--------------------	------	---	---	---	-----	-----

Stage 1	-	-	-	-	727	-
---------	---	---	---	---	-----	---

Stage 2	-	-	-	-	613	-
---------	---	---	---	---	-----	---

Platoon blocked, %	-	-	-	-	-	-
--------------------	---	---	---	---	---	---

Mov Cap-1 Maneuver	1109	-	-	-	328	711
--------------------	------	---	---	---	-----	-----

Mov Cap-2 Maneuver	-	-	-	-	428	-
--------------------	---	---	---	---	-----	---

Stage 1	-	-	-	-	691	-
---------	---	---	---	---	-----	---

Stage 2	-	-	-	-	613	-
---------	---	---	---	---	-----	---

Approach	EB	WB	SB
----------	----	----	----

HCM Control Delay, s	1.1	0	12.2
----------------------	-----	---	------

HCM LOS			B
---------	--	--	---

Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	SBLn2
-----------------------	-----	-----	-----	-----	-------	-------

Capacity (veh/h)	1109	-	-	-	428	711
------------------	------	---	---	---	-----	-----

HCM Lane V/C Ratio	0.049	-	-	-	0.127	0.138
--------------------	-------	---	---	---	-------	-------

HCM Control Delay (s)	8.4	-	-	-	14.6	10.9
-----------------------	-----	---	---	---	------	------

HCM Lane LOS	A	-	-	-	B	B
--------------	---	---	---	---	---	---

HCM 95th %tile Q(veh)	0.2	-	-	-	0.4	0.5
-----------------------	-----	---	---	---	-----	-----

Intersection

Int Delay, s/veh 11.8

Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗
Traffic Vol, veh/h	140	810	780	210	110	60
Future Vol, veh/h	140	810	780	210	110	60
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	100	-	-	0	0	100
Veh in Median Storage, #	-	0	0	-	1	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	152	880	848	228	120	65

Major/Minor	Major1	Major2	Minor2			
Conflicting Flow All	1076	0	-	0	2032	848
Stage 1	-	-	-	-	848	-
Stage 2	-	-	-	-	1184	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	648	-	-	-	~ 63	361
Stage 1	-	-	-	-	420	-
Stage 2	-	-	-	-	290	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	648	-	-	-	~ 48	361
Mov Cap-2 Maneuver	-	-	-	-	~ 106	-
Stage 1	-	-	-	-	321	-
Stage 2	-	-	-	-	290	-

Approach EB WB SB

HCM Control Delay, s 1.8 0 136.9


HCM LOS F

Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	SBLn2
Capacity (veh/h)	648	-	-	-	106	361
HCM Lane V/C Ratio	0.235	-	-	-	1.128	0.181
HCM Control Delay (s)	12.3	-	-	-	202.2	17.2
HCM Lane LOS	B	-	-	-	F	C
HCM 95th %tile Q(veh)	0.9	-	-	-	7.6	0.7


Notes

~: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon

HCM 6th Signalized Intersection Summary Proposed AM - Conventional Intersection (Signal)
13: Pleasant St & 19th St 10/10/2017



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑
Traffic Volume (veh/h)	50	350	300	100	50	90
Future Volume (veh/h)	50	350	300	100	50	90
Initial Q (Qb), veh	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00			1.00	1.00	1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach		No	No		No	
Adj Sat Flow, veh/h/ln	1826	1826	1811	1811	1841	1841
Adj Flow Rate, veh/h	54	380	326	109	54	98
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	5	5	6	6	4	4
Cap, veh/h	491	974	544	461	213	190
Arrive On Green	0.06	0.53	0.30	0.30	0.12	0.12
Sat Flow, veh/h	1739	1826	1811	1535	1753	1560
Grp Volume(v), veh/h	54	380	326	109	54	98
Grp Sat Flow(s),veh/h/ln1739	1826	1811	1535	1753	1560	
Q Serve(g_s), s	0.5	3.6	4.5	1.6	0.8	1.7
Cycle Q Clear(g_c), s	0.5	3.6	4.5	1.6	0.8	1.7
Prop In Lane	1.00			1.00	1.00	1.00
Lane Grp Cap(c), veh/h	491	974	544	461	213	190
V/C Ratio(X)	0.11	0.39	0.60	0.24	0.25	0.52
Avail Cap(c_a), veh/h	745	2392	1686	1429	1330	1183
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	5.6	4.0	8.7	7.6	11.5	11.9
Incr Delay (d2), s/veh	0.1	0.3	1.1	0.3	0.6	2.2
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln0.1	0.5	1.2	0.0	0.3	0.1	
Unsig. Movement Delay, s/veh						
LnGrp Delay(d),s/veh	5.7	4.2	9.7	7.9	12.2	14.1
LnGrp LOS	A	A	A	A	B	B
Approach Vol, veh/h	434	435		152		
Approach Delay, s/veh	4.4	9.3		13.4		
Approach LOS	A	A		B		
Timer - Assigned Phs			4	6	7	8
Phs Duration (G+Y+Rc), s			20.5	8.5	6.8	13.7
Change Period (Y+Rc), s			5.0	5.0	5.0	5.0
Max Green Setting (Gmax), s			38.0	22.0	6.0	27.0
Max Q Clear Time (g_c+l1), s			5.6	3.7	2.5	6.5
Green Ext Time (p_c), s			2.5	0.4	0.0	2.3
Intersection Summary						
HCM 6th Ctrl Delay		7.8				
HCM 6th LOS		A				



Movement	EBL	EBT	WBT	WBR	SBL	SBR	
Lane Configurations	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗	
Traffic Volume (veh/h)	140	810	780	210	110	60	
Future Volume (veh/h)	140	810	780	210	110	60	
Initial Q (Qb), veh	0	0	0	0	0	0	
Ped-Bike Adj(A_pbT)	1.00			1.00	1.00	1.00	
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	
Work Zone On Approach		No	No		No		
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	
Adj Flow Rate, veh/h	152	880	848	228	120	65	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	
Percent Heavy Veh, %	2	2	2	2	2	2	
Cap, veh/h	376	1317	1014	859	184	164	
Arrive On Green	0.09	0.70	0.54	0.54	0.10	0.10	
Sat Flow, veh/h	1781	1870	1870	1585	1781	1585	
Grp Volume(v), veh/h	152	880	848	228	120	65	
Grp Sat Flow(s),veh/h/ln	1781	1870	1870	1585	1781	1585	
Q Serve(g_s), s	1.6	13.7	19.8	4.0	3.4	2.0	
Cycle Q Clear(g_c), s	1.6	13.7	19.8	4.0	3.4	2.0	
Prop In Lane	1.00			1.00	1.00	1.00	
Lane Grp Cap(c), veh/h	376	1317	1014	859	184	164	
V/C Ratio(X)	0.40	0.67	0.84	0.27	0.65	0.40	
Avail Cap(c_a), veh/h	429	1691	1331	1128	617	549	
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	
Upstream Filter(l)	1.00	1.00	1.00	1.00	1.00	1.00	
Uniform Delay (d), s/veh	9.6	4.3	10.0	6.4	22.4	21.8	
Incr Delay (d2), s/veh	0.7	0.7	3.7	0.2	3.9	1.6	
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	
%ile BackOfQ(50%),veh/ln	0.7	2.5	6.8	1.0	1.5	1.8	
Unsig. Movement Delay, s/veh							
LnGrp Delay(d),s/veh	10.3	5.0	13.7	6.5	26.3	23.4	
LnGrp LOS	B	A	B	A	C	C	
Approach Vol, veh/h	1032	1076		185			
Approach Delay, s/veh	5.8	12.2		25.3			
Approach LOS		A	B		C		
Timer - Assigned Phs			4	6	7	8	
Phs Duration (G+Y+Rc), s			41.6		10.4	8.4	33.2
Change Period (Y+Rc), s			5.0		5.0	4.0	5.0
Max Green Setting (Gmax), s			47.0		18.0	6.0	37.0
Max Q Clear Time (g_c+l1), s			15.7		5.4	3.6	21.8
Green Ext Time (p_c), s			8.1		0.4	0.1	6.4
Intersection Summary							
HCM 6th Ctrl Delay		10.3					
HCM 6th LOS		B					

LANE SUMMARY

 Site: 101 [Pleasant Street & 19th Street - AM]

 Network: N101 [Pleasant Street AM Peak - S2A]

New Site
Roundabout

Lane Use and Performance															
	Demand Flows	Arrival Flows		Cap.	Deg. Satn	Lane Util.	Average Delay	Level of Service	95% Back of Queue Veh	Lane Config	Lane Length	Cap. h ft	Adj. %	Prob. Block. %	
	Total veh/h	Total HV	% veh/h	HV %	veh/h	v/c	%	sec	Veh	Dist ft					
East: Pleasant Street															
Lane 1 ^d	254	3.0	254	3.0	1321	0.193	100	4.3	LOS A	0.7	19.0	Full	830	0.0	0.0
Lane 2	180	3.0	180	3.0	1321	0.137	71 ⁶	3.8	LOS A	0.5	12.7	Full	830	0.0	0.0
Approach	435	3.0	435	3.0		0.193		4.1	LOS A	0.7	19.0				
North: 19th Street															
Lane 1 ^d	152	3.0	152	3.0	1036	0.147	100	4.8	LOS A	0.6	14.3	Full	1600	0.0	0.0
Approach	152	3.0	152	3.0		0.147		4.8	LOS A	0.6	14.3				
West: Pleasant Street															
Lane 1	217	3.0	217	3.0	1310	0.166	100	4.1	LOS A	0.7	18.7	Short	350	0.0	NA
Lane 2 ^d	217	3.0	217	3.0	1310	0.166	100	4.1	LOS A	0.7	18.7	Full	1100	0.0	0.0
Approach	435	3.0	435	3.0		0.166		4.1	LOS A	0.7	18.7				
Intersection	1022	3.0	1022	3.0		0.193		4.2	LOS A	0.7	19.0				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Network Data dialog (Network tab).

Roundabout LOS Method: Same as Signalised Intersections.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

HCM Delay Formula option is used. Control Delay does not include Geometric Delay since Exclude Geometric Delay option applies.

Gap-Acceptance Capacity: Traditional M1.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Largest change in Average Back of Queue or Degree of Saturation for any lane during the last three iterations: 0.1 %

Number of Iterations: 5 (maximum specified: 10)

⁶ Lane under-utilisation due to downstream effects

^d Dominant lane on roundabout approach

SIDRA INTERSECTION 7.0 | Copyright © 2000-2017 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: A&F ENGINEERING CO., LLC | Processed: Tuesday, October 24, 2017 9:07:44 AM

Project: Z:\2017\17068S - Noblesville, Traffic, Pleasant St. Bridge\SIDRA\Final Scenario\Roundabout Alternative AM Peak - S2A.sip7

LANE SUMMARY

 Site: 101 [Pleasant Street & 19th Street - PM]

 Network: N101 [Pleasant Street PM Peak - S2A]

New Site
Roundabout

Lane Use and Performance															
	Demand Flows	Arrival Flows		Cap.	Deg. Satn	Lane Util.	Average Delay	Level of Service	95% Back of Queue Veh	Lane Config	Lane Length	Cap. h ft	Adj. %	Prob. Block. %	
Total veh/h	HV %	Total veh/h	HV %	veh/h	v/c	%	sec		Dist ft						
East: Pleasant Street															
Lane 1 ^d	630	3.0	630	3.0	1210	0.520	100	8.8	LOS A	3.2	80.9	Full	821	0.0	0.0
Lane 2	447	3.0	447	3.0	1210	0.369	71 ⁶	6.5	LOS A	1.8	46.6	Full	821	0.0	0.0
Approach	1076	3.0	1076	3.0		0.520		7.8	LOS A	3.2	80.9				
North: 19th Street															
Lane 1 ^d	185	3.0	185	3.0	656	0.282	100	9.0	LOS A	1.0	26.7	Full	1600	0.0	0.0
Approach	185	3.0	185	3.0		0.282		9.0	LOS A	1.0	26.7				
West: Pleasant Street															
Lane 1	516	3.0	516	3.0	1232	0.419	100	7.1	LOS A	2.4	62.2	Short	350	0.0	NA
Lane 2 ^d	516	3.0	516	3.0	1232	0.419	100	7.1	LOS A	2.4	62.2	Full	1100	0.0	0.0
Approach	1033	3.0	1033	3.0		0.419		7.1	LOS A	2.4	62.2				
Intersection	2293	3.0	2293	3.0		0.520		7.6	LOS A	3.2	80.9				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Network Data dialog (Network tab).

Roundabout LOS Method: Same as Signalised Intersections.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

HCM Delay Formula option is used. Control Delay does not include Geometric Delay since Exclude Geometric Delay option applies.

Gap-Acceptance Capacity: Traditional M1.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Largest change in Average Back of Queue or Degree of Saturation for any lane during the last three iterations: 0.1 %

Number of Iterations: 5 (maximum specified: 10)

⁶ Lane under-utilisation due to downstream effects

^d Dominant lane on roundabout approach

LANE SUMMARY

 Site: 101 [Pleasant Street & 19th Street - AM - Import]

 Network: N101 [Plesant]

New Site
Roundabout

Lane Use and Performance															
	Demand Flows	Arrival Flows			Cap.	Deg. Satn	Lane Util.	Average Delay	Level of Service	95% Back of Queue Veh	Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %	
	Total veh/h	HV %	Total veh/h	HV %	veh/h	v/c	%	sec							
East: Pleasant Street															
Lane 1 ^d	435	3.0	435	3.0	1265	0.344	100	6.0	LOS A	2.0	51.9	Full	830	0.0	0.0
Approach	435	3.0	435	3.0		0.344		6.0	LOS A	2.0	51.9				
North: 19th Street															
Lane 1 ^d	152	3.0	152	3.0	951	0.160	100	5.3	LOS A	0.7	17.8	Full	1600	0.0	0.0
Approach	152	3.0	152	3.0		0.160		5.3	LOS A	0.7	17.8				
West: Pleasant Street															
Lane 1 ^d	435	3.0	435	3.0	1265	0.344	100	6.0	LOS A	2.0	51.9	Full	1100	0.0	0.0
Approach	435	3.0	435	3.0		0.344		6.0	LOS A	2.0	51.9				
Intersection	1022	3.0	1022	3.0		0.344		5.9	LOS A	2.0	51.9				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Network Data dialog (Network tab). Roundabout LOS Method: Same as Signalled Intersections.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

HCM Delay Formula option is used. Control Delay does not include Geometric Delay since Exclude Geometric Delay option applies.

Gap-Acceptance Capacity: Traditional M1.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Largest change in Average Back of Queue or Degree of Saturation for any lane during the last three iterations: 0.0 %

Number of Iterations: 5 (maximum specified: 10)

^d Dominant lane on roundabout approach

SIDRA INTERSECTION 7.0 | Copyright © 2000-2017 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: A&F ENGINEERING CO., LLC | Processed: Wednesday, October 11, 2017 11:25:20 AM

Project: Z:\2017\17068S - Noblesville, Traffic, Pleasant St. Bridge\SIDRA\Roundabout Alternative - S2B\Roundabout Alternative AM Peak - S2B.sip7

LANE SUMMARY

 Site: 101 [Pleasant Street & 19th Street - PM - Import]

 Network: N101 [Pleasant Street PM Peak - S2B]

New Site
Roundabout

Lane Use and Performance																
	Demand Flows	Arrival Flows			Cap.	Deg. Satn	Lane Util.	Average Delay	Level of Service	95% Back of Queue Veh	Lane Config	Lane Length	Cap. Adj.	Prob. Block.		
	Total veh/h	HV %	Total veh/h	HV %	veh/h	v/c	%	sec		Veh	Dist ft	ft	%	%		
East: Pleasant Street																
Lane 1 ^d	1076	3.0	1019	3.0	1155	0.883	100	25.1	LOS C	18.0	459.8	Full	821	0.0	0.0	
Approach	1076	3.0	1019 ^{N1}	3.0		0.883		25.1	LOS C	18.0	459.8					
North: 19th Street																
Lane 1 ^d	185	3.0	185	3.0	490	0.377	100	13.6	LOS B	1.4	36.5	Full	1600	-15.0 ^{N3}	0.0	
Approach	185	3.0	185	3.0		0.377		13.6	LOS B	1.4	36.5					
West: Pleasant Street																
Lane 1 ^d	1033	3.0	1033	3.0	958	1.077	100	72.3	LOS F	61.1	1563.5	Full	1100	-18.9 ^{N3}	16.6	
Approach	1033	3.0	1033	3.0		1.077		72.3	LOS E	61.1	1563.5					
Intersection	2293	3.0	2237 ^{N1}	3.1		1.077		45.9	LOS D	61.1	1563.5					

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Network Data dialog (Network tab).

Roundabout LOS Method: Same as Signalised Intersections.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

HCM Delay Formula option is used. Control Delay does not include Geometric Delay since Exclude Geometric Delay option applies.

Gap-Acceptance Capacity: Traditional M1.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Largest change in Average Back of Queue or Degree of Saturation for any lane during the last three iterations: 4.3 %

Number of Iterations: 10 (maximum specified: 10)

^d Dominant lane on roundabout approach

^{N1} Arrival Flow value is reduced due to capacity constraint at oversaturated upstream lanes.


^{N3} Capacity Adjustment due to downstream lane blockage determined by the program.

Queues

13: Pleasant St & 19th St


Proposed AM - Conventional Intersection (Signal)

10/27/2017



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Group Flow (vph)	54	380	326	109	54	98
v/c Ratio	0.08	0.32	0.32	0.12	0.10	0.18
Control Delay	4.0	4.8	9.2	3.2	15.1	6.1
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	4.0	4.8	9.2	3.2	15.1	6.1
Queue Length 50th (ft)	4	32	26	0	6	0
Queue Length 95th (ft)	14	79	123	22	37	30
Internal Link Dist (ft)		1026	741		712	
Turn Bay Length (ft)	100				100	
Base Capacity (vph)	710	1674	1479	1277	1295	1184
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.08	0.23	0.22	0.09	0.04	0.08

Intersection Summary



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Group Flow (vph)	152	880	848	228	120	65
v/c Ratio	0.39	0.63	0.72	0.21	0.39	0.20
Control Delay	6.5	8.5	17.5	2.0	29.5	8.9
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	6.5	8.5	17.5	2.0	29.5	8.9
Queue Length 50th (ft)	15	160	257	0	46	0
Queue Length 95th (ft)	37	337	#542	29	90	30
Internal Link Dist (ft)		1026	741		712	
Turn Bay Length (ft)	100				100	
Base Capacity (vph)	385	1415	1193	1096	635	609
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.39	0.62	0.71	0.21	0.19	0.11

Intersection Summary

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

QUEUE DISTANCE (%ILE)

Largest 95% Back of Queue Distance for any lane used by vehicle movement (feet)


 Site: 101 [Pleasant Street & 19th Street - AM]

 Network: N101 [Pleasant Street AM Peak - S2A]

New Site
Roundabout

All Movement Classes

	East	North	West	Intersection
Vehicle Queue (%ile)	19	14	19	19

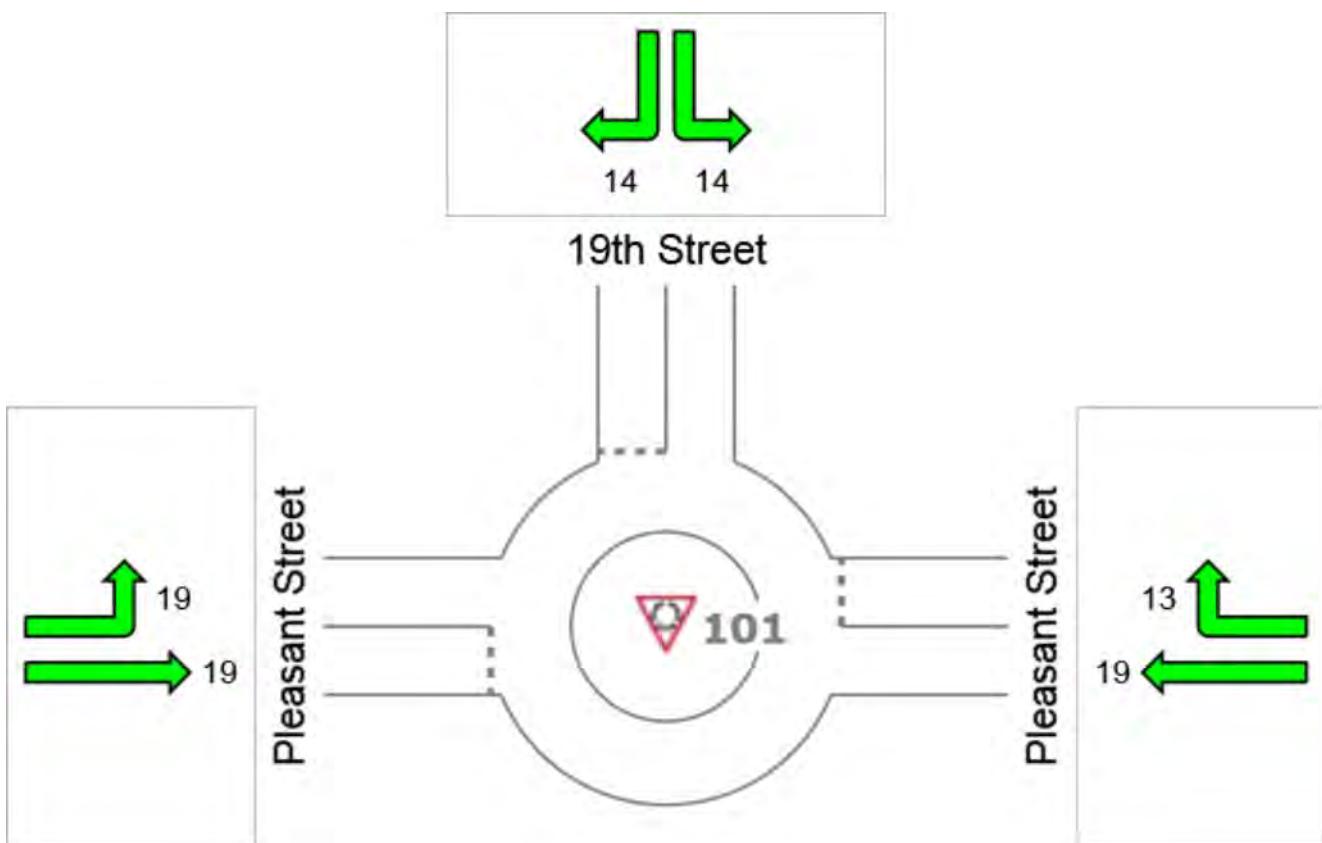

Colour code based on Queue Storage Ratio



QUEUE DISTANCE (%ILE)

Largest 95% Back of Queue Distance for any lane used by vehicle movement (feet)


 Site: 101 [Pleasant Street & 19th Street - PM]

 Network: N101 [Pleasant Street PM Peak - S2A]

New Site
Roundabout

All Movement Classes

	East	North	West	Intersection
Vehicle Queue (%ile)	81	27	62	81

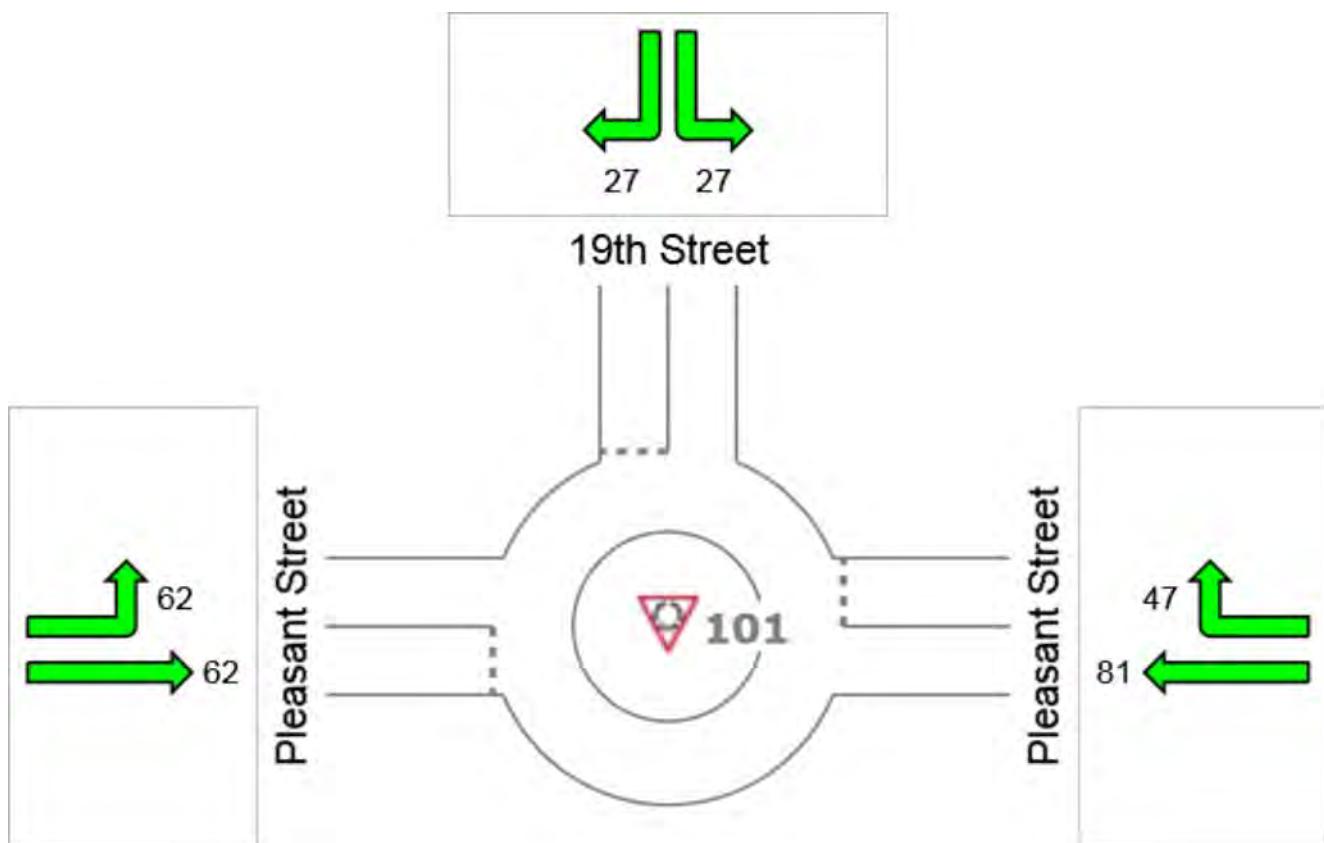

Colour code based on Queue Storage Ratio



QUEUE DISTANCE (%ILE)

Largest 95% Back of Queue Distance for any lane used by vehicle movement (feet)




Network: N101 [Pleasant]

 Site: 101 [Pleasant Street & 19th Street - AM - Import]

New Site
Roundabout

All Movement Classes

	East	North	West	Intersection
Vehicle Queue (%ile)	52	18	52	52

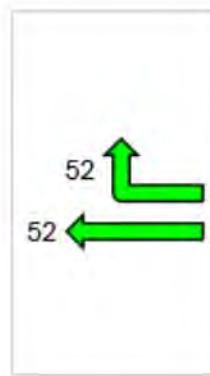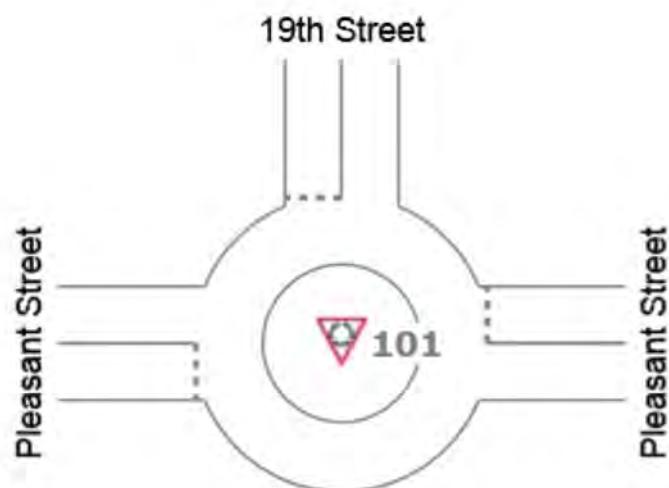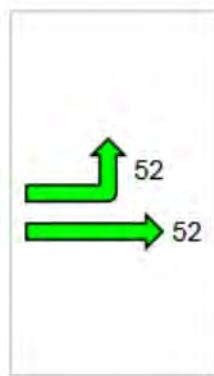

Colour code based on Queue Storage Ratio



QUEUE DISTANCE (%ILE)

Largest 95% Back of Queue Distance for any lane used by vehicle movement (feet)


 Site: 101 [Pleasant Street & 19th Street - PM - Import]

 Network: N101 [Pleasant Street PM Peak - S2B]

New Site
Roundabout

All Movement Classes

	East	North	West	Intersection
Vehicle Queue (%ile)	460	36	1564	1564

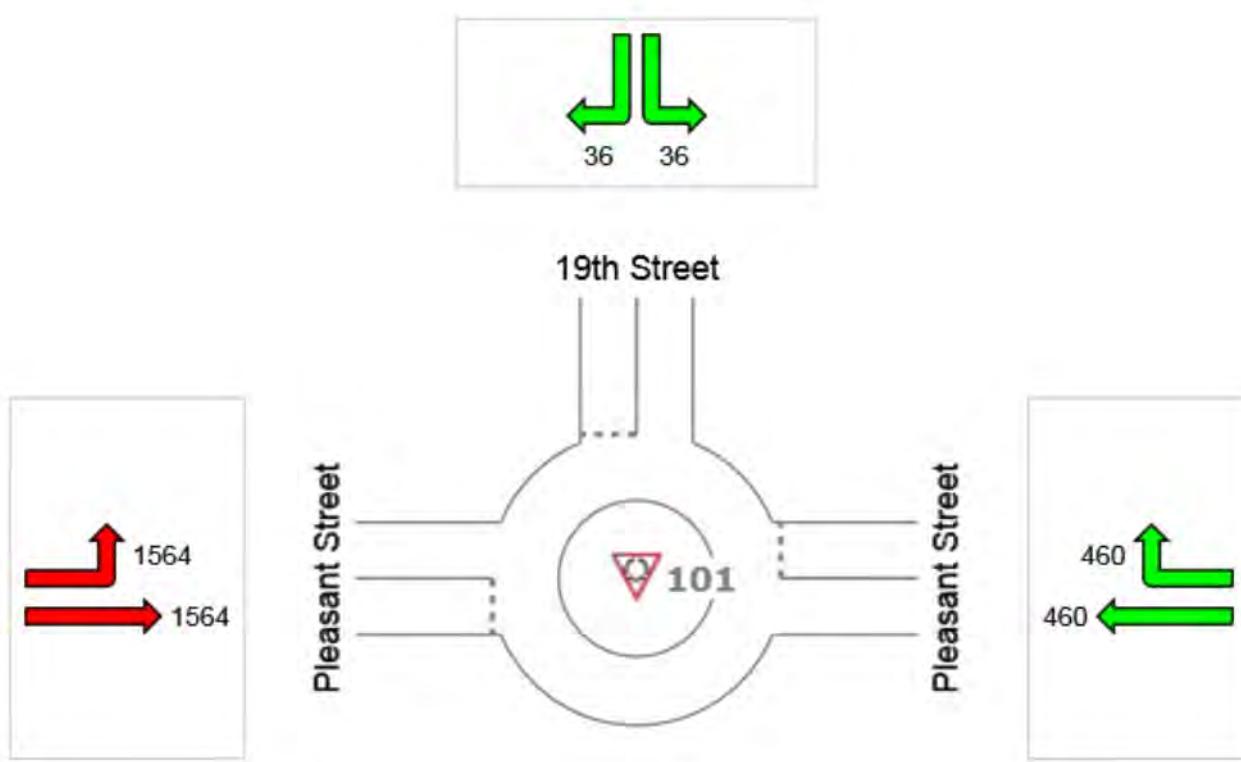

Colour code based on Queue Storage Ratio



PLEASANT STREET & 16TH STREET

TRAFFIC VOLUME COUNTS
CAPACITY ANALYSIS
QUEUE LENGTH ANALYSIS

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :
COUNTED BY :

City of Noblesville
Pleasant Street & 16th Street
9/12/2017
Miovision

	TOTAL VEHICLES (PASSENGER CARS + TRUCKS)											
	AM PEAK HOUR VOLUMES BEGINS 7:15 AM				OFF PEAK HOUR VOLUMES BEGINS				PM PEAK HOUR VOLUMES BEGINS 4:30 PM			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	12	0	41	53					33	0	67	100
SOUTHBOUND	0	2	0	2					1	1	0	2
EASTBOUND	1	202	16	219					0	531	20	551
WESTBOUND	44	220	2	266					65	389	0	454

	PEAK HOUR FACTOR											
	AM PEAK HOUR FACTOR				OFF PEAK HOUR FACTOR				PM PEAK HOUR FACTOR			
	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION
NORTHBOUND	0.63								0.81			
SOUTHBOUND	0.50								0.25			
EASTBOUND	0.90		0.86						0.93			0.95
WESTBOUND	0.83								0.85			

	TRUCK PERCENTAGE											
	AM PEAK HOUR PERCENTAGE				OFF PEAK HOUR PERCENTAGE				PM PEAK HOUR PERCENTAGE			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	8.3%	0.0%	2.4%	3.8%					0.0%	0.0%	1.5%	1.0%
SOUTHBOUND	0.0%	100.0%	0.0%	100.0%					0.0%	0.0%	0.0%	0.0%
EASTBOUND	0.0%	4.0%	0.0%	3.7%					0.0%	0.8%	0.0%	0.7%
WESTBOUND	6.8%	5.9%	50.0%	6.4%					0.0%	0.8%	0.0%	0.7%

HOURLY SUMMARY												
HOUR				NB	SB	NB+SB	EB	WB	EB+WB	TOTAL		
6:00 AM	TO	7:00 AM		18	0	18	54	37	91	109		
7:00 AM	TO	8:00 AM		68	1	69	205	244	449	518		
8:00 AM	TO	9:00 AM		13	1	14	119	113	232	246		
4:00 PM	TO	5:00 PM		59	0	59	273	210	483	542		
5:00 PM	TO	6:00 PM		63	5	68	482	441	923	991		
6:00 PM	TO	7:00 PM		23	0	23	214	188	402	425		
TOTAL VOLUME				244	7	251	1347	1233	2580	2831		
PERCENTAGE				8.6%	0.2%	8.9%	47.6%	43.6%	91.1%	100.0%		

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :

City of Noblesville
Pleasant Street & 16th Street
9/12/2017

DIRECTION OF TRAVEL : NORTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	3	0	3	0	0	0	14	1	15	17	1	18
7:00 AM - 8:00 AM	13	0	13	0	0	0	54	1	55	67	1	68
8:00 AM - 9:00 AM	2	2	4	1	0	1	5	3	8	8	5	13
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	15	0	15	0	0	0	43	1	44	58	1	59
5:00 PM - 6:00 PM	25	0	25	0	0	0	38	0	38	63	0	63
6:00 PM - 7:00 PM	6	0	6	1	0	1	16	0	16	23	0	23
PASSENGER	64 97.0%			2 100.0%			170 96.6%			236 96.7%		
TRUCK	2 3.0%			0 0.0%			6 3.4%			8 3.3%		
BOTH	66 27.0%			2 0.8%			176 72.1%			244 100.0%		

DIRECTION OF TRAVEL : SOUTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0
7:00 AM - 8:00 AM	0	0	0	0	1	1	0	0	0	0	1	1
8:00 AM - 9:00 AM	0	0	0	0	1	1	0	0	0	0	1	1
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0
5:00 PM - 6:00 PM	2	0	2	1	0	1	2	0	2	5	0	5
6:00 PM - 7:00 PM	0	0	0	0	0	0	0	0	0	0	0	0
PASSENGER	2 100.0%			1 33.3%			2 100.0%			5 71.4%		
TRUCK	0 0.0%			2 66.7%			0 0.0%			2 28.6%		
BOTH	2 28.6%			3 42.9%			2 28.6%			7 100.0%		

DIRECTION OF TRAVEL : EASTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	0	0	0	47	2	49	5	0	5	52	2	54
7:00 AM - 8:00 AM	0	0	0	182	9	191	13	1	14	195	10	205
8:00 AM - 9:00 AM	1	0	1	108	3	111	7	0	7	116	3	119
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	0	0	0	258	2	260	13	0	13	271	2	273
5:00 PM - 6:00 PM	1	0	1	465	4	469	12	0	12	478	4	482
6:00 PM - 7:00 PM	3	0	3	201	1	202	9	0	9	213	1	214
PASSENGER	5 100.0%			1261 98.4%			59 98.3%			1325 98.4%		
TRUCK	0 0.0%			21 1.6%			1 1.7%			22 1.6%		
BOTH	5 0.4%			1282 95.2%			60 4.5%			1347 100.0%		

DIRECTION OF TRAVEL : WESTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	1	0	1	36	0	36	0	0	0	37	0	37
7:00 AM - 8:00 AM	40	1	41	190	11	201	1	1	2	231	13	244
8:00 AM - 9:00 AM	13	4	17	90	6	96	0	0	0	103	10	113
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	23	0	23	186	1	187	0	0	0	209	1	210
5:00 PM - 6:00 PM	56	0	56	382	2	384	1	0	1	439	2	441
6:00 PM - 7:00 PM	12	0	12	173	0	173	3	0	3	188	0	188
PASSENGER	145 96.7%			1057 98.1%			5 83.3%			1207 97.9%		
TRUCK	5 3.3%			20 1.9%			1 1.6%			26 2.1%		
BOTH	150 12.2%			1077 87.3%			6 0.5%			1233 100.0%		

Intersection

Int Delay, s/veh 2.1

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↔	↔		↔	↔	
Traffic Vol, veh/h	5	330	20	60	330	5	20	5	50	5	5	5
Future Vol, veh/h	5	330	20	60	330	5	20	5	50	5	5	5
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None									
Storage Length	100	-	-	165	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	1	-	-	1	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	85	85	85	85	85	85	85	85	85	85	85	85
Heavy Vehicles, %	5	5	5	6	6	6	4	4	4	4	4	4
Mvmt Flow	6	388	24	71	388	6	24	6	59	6	6	6

Major/Minor	Major1	Major2		Minor1		Minor2						
Conflicting Flow All	394	0	0	412	0	0	951	948	400	978	957	391
Stage 1	-	-	-	-	-	-	412	412	-	533	533	-
Stage 2	-	-	-	-	-	-	539	536	-	445	424	-
Critical Hdwy	4.15	-	-	4.16	-	-	7.14	6.54	6.24	7.14	6.54	6.24
Critical Hdwy Stg 1	-	-	-	-	-	-	6.14	5.54	-	6.14	5.54	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.14	5.54	-	6.14	5.54	-
Follow-up Hdwy	2.245	-	-	2.254	-	-	3.536	4.036	3.336	3.536	4.036	3.336
Pot Cap-1 Maneuver	1148	-	-	1126	-	-	238	259	646	228	256	653
Stage 1	-	-	-	-	-	-	613	591	-	527	522	-
Stage 2	-	-	-	-	-	-	523	520	-	588	584	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	1148	-	-	1126	-	-	221	241	646	194	239	653
Mov Cap-2 Maneuver	-	-	-	-	-	-	342	350	-	310	337	-
Stage 1	-	-	-	-	-	-	610	588	-	524	489	-
Stage 2	-	-	-	-	-	-	480	487	-	526	581	-

Approach	EB	WB		NB		SB		
HCM Control Delay, s	0.1	1.3		13.8		14.7		
HCM LOS				B		B		
<hr/>								
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1
Capacity (veh/h)	499	1148	-	-	1126	-	-	388
HCM Lane V/C Ratio	0.177	0.005	-	-	0.063	-	-	0.045
HCM Control Delay (s)	13.8	8.2	-	-	8.4	-	-	14.7
HCM Lane LOS	B	A	-	-	A	-	-	B
HCM 95th %tile Q(veh)	0.6	0	-	-	0.2	-	-	0.1

Intersection

Int Delay, s/veh 5.1

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗
Traffic Vol, veh/h	5	860	30	80	690	5	40	5	80	5	5	5
Future Vol, veh/h	5	860	30	80	690	5	40	5	80	5	5	5
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	-	None	-	-	None	-	-	None	-	-
Storage Length	100	-	-	165	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	1	-	-	1	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	85	85	85	85	85	85	85	85	85	85	85	85
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	6	1012	35	94	812	6	47	6	94	6	6	6

Major/Minor	Major1	Major2			Minor1			Minor2				
Conflicting Flow All	818	0	0	1047	0	0	2051	2048	1030	2095	2062	815
Stage 1	-	-	-	-	-	-	1042	1042	-	1003	1003	-
Stage 2	-	-	-	-	-	-	1009	1006	-	1092	1059	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	810	-	-	665	-	-	~ 41	56	283	38	55	377
Stage 1	-	-	-	-	-	-	277	307	-	292	320	-
Stage 2	-	-	-	-	-	-	290	319	-	260	301	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	810	-	-	665	-	-	~ 35	48	283	22	47	377
Mov Cap-2 Maneuver	-	-	-	-	-	-	131	152	-	60	128	-
Stage 1	-	-	-	-	-	-	275	305	-	290	275	-
Stage 2	-	-	-	-	-	-	240	274	-	169	299	-

Approach	EB	WB			NB			SB			
HCM Control Delay, s	0.1	1.2			60.2			43.5			
HCM LOS					F			E			
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1			
Capacity (veh/h)	201	810	-	-	665	-	-	111			
HCM Lane V/C Ratio	0.732	0.007	-	-	0.142	-	-	0.159			
HCM Control Delay (s)	60.2	9.5	-	-	11.3	-	-	43.5			
HCM Lane LOS	F	A	-	-	B	-	-	E			
HCM 95th %tile Q(veh)	4.8	0	-	-	0.5	-	-	0.5			

Notes

~: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon

HCM 6th Signalized Intersection Summary Proposed AM - Conventional Intersection (Signal)
 14: 16th St & Pleasant St 10/10/2017



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑ ↗	↑ ↘		↑ ↗	↑ ↘		↔	↔		↔	↔	
Traffic Volume (veh/h)	5	330	20	60	330	5	20	5	50	5	5	5
Future Volume (veh/h)	5	330	20	60	330	5	20	5	50	5	5	5
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No			No			No			No		
Adj Sat Flow, veh/h/ln	1826	1826	1826	1811	1811	1811	1841	1841	1841	1841	1841	1841
Adj Flow Rate, veh/h	6	388	24	71	388	6	24	6	59	6	6	6
Peak Hour Factor	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85
Percent Heavy Veh, %	5	5	5	6	6	6	4	4	4	4	4	4
Cap, veh/h	599	748	46	584	782	12	252	11	112	273	65	61
Arrive On Green	0.44	0.44	0.44	0.44	0.44	0.44	0.11	0.11	0.11	0.11	0.11	0.11
Sat Flow, veh/h	967	1702	105	943	1779	28	417	104	1026	517	596	556
Grp Volume(v), veh/h	6	0	412	71	0	394	89	0	0	18	0	0
Grp Sat Flow(s), veh/h/ln	967	0	1807	943	0	1806	1547	0	0	1669	0	0
Q Serve(g_s), s	0.1	0.0	3.7	1.3	0.0	3.5	1.0	0.0	0.0	0.0	0.0	0.0
Cycle Q Clear(g_c), s	3.6	0.0	3.7	5.0	0.0	3.5	1.2	0.0	0.0	0.2	0.0	0.0
Prop In Lane	1.00		0.06	1.00		0.02	0.27		0.66	0.33		0.33
Lane Grp Cap(c), veh/h	599	0	794	584	0	794	375	0	0	399	0	0
V/C Ratio(X)	0.01	0.00	0.52	0.12	0.00	0.50	0.24	0.00	0.00	0.05	0.00	0.00
Avail Cap(c_a), veh/h	1396	0	2285	1362	0	2284	1722	0	0	1763	0	0
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	0.00	1.00	0.00	0.00
Uniform Delay (d), s/veh	5.7	0.0	4.5	6.3	0.0	4.4	9.3	0.0	0.0	8.9	0.0	0.0
Incr Delay (d2), s/veh	0.0	0.0	0.5	0.1	0.0	0.5	0.3	0.0	0.0	0.0	0.0	0.0
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	0.0	0.4	0.1	0.0	0.4	0.3	0.0	0.0	0.1	0.0	0.0	0.0
Unsig. Movement Delay, s/veh												
LnGrp Delay(d), s/veh	5.7	0.0	5.0	6.4	0.0	4.9	9.6	0.0	0.0	8.9	0.0	0.0
LnGrp LOS	A	A	A	A	A	A	A	A	A	A	A	A
Approach Vol, veh/h	418			465			89			18		
Approach Delay, s/veh	5.0			5.2			9.6			8.9		
Approach LOS	A			A			A			A		
Timer - Assigned Phs	2		4		6		8					
Phs Duration (G+Y+R _c), s	7.4		14.7		7.4		14.7					
Change Period (Y+R _c), s	5.0		5.0		5.0		5.0					
Max Green Setting (Gmax), s	22.0		28.0		22.0		28.0					
Max Q Clear Time (g_c+l1), s	3.2		5.7		2.2		7.0					
Green Ext Time (p_c), s	0.4		2.6		0.0		2.8					
Intersection Summary												
HCM 6th Ctrl Delay			5.6									
HCM 6th LOS			A									

HCM 6th Signalized Intersection Summary Proposed PM - Conventional Intersection (Signal)
 14: 16th St & Pleasant St 10/27/2017



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑ ↗	↑ ↘		↑ ↗	↑ ↘			↖ ↗			↖ ↗	
Traffic Volume (veh/h)	5	860	30	80	690	5	40	5	80	5	5	5
Future Volume (veh/h)	5	860	30	80	690	5	40	5	80	5	5	5
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No			No			No			No		
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	6	1012	35	94	812	6	47	6	94	6	6	6
Peak Hour Factor	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	437	1255	43	294	1295	10	132	22	125	125	104	72
Arrive On Green	0.70	0.70	0.70	0.70	0.70	0.70	0.12	0.12	0.12	0.12	0.12	0.12
Sat Flow, veh/h	668	1797	62	539	1854	14	387	175	998	322	829	575
Grp Volume(v), veh/h	6	0	1047	94	0	818	147	0	0	18	0	0
Grp Sat Flow(s), veh/h/ln	668	0	1859	539	0	1868	1561	0	0	1726	0	0
Q Serve(g_s), s	0.3	0.0	22.0	8.3	0.0	13.3	3.6	0.0	0.0	0.0	0.0	0.0
Cycle Q Clear(g_c), s	13.6	0.0	22.0	30.3	0.0	13.3	5.1	0.0	0.0	0.5	0.0	0.0
Prop In Lane	1.00		0.03	1.00		0.01	0.32		0.64	0.33		0.33
Lane Grp Cap(c), veh/h	437	0	1298	294	0	1305	279	0	0	300	0	0
V/C Ratio(X)	0.01	0.00	0.81	0.32	0.00	0.63	0.53	0.00	0.00	0.06	0.00	0.00
Avail Cap(c_a), veh/h	584	0	1708	413	0	1716	575	0	0	599	0	0
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	0.00	1.00	0.00	0.00
Uniform Delay (d), s/veh	8.2	0.0	5.9	16.3	0.0	4.6	23.9	0.0	0.0	21.9	0.0	0.0
Incr Delay (d2), s/veh	0.0	0.0	2.2	0.6	0.0	0.5	1.5	0.0	0.0	0.1	0.0	0.0
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	0.0	5.2	1.0	0.0	2.9	1.9	0.0	0.0	0.2	0.0	0.0	0.0
Unsig. Movement Delay, s/veh												
LnGrp Delay(d), s/veh	8.2	0.0	8.1	17.0	0.0	5.1	25.4	0.0	0.0	22.0	0.0	0.0
LnGrp LOS	A	A	A	B	A	A	C	A	A	C	A	A
Approach Vol, veh/h	1053			912			147			18		
Approach Delay, s/veh	8.1			6.3			25.4			22.0		
Approach LOS	A			A			C			C		
Timer - Assigned Phs	2		4		6		8					
Phs Duration (G+Y+R _c), s	12.1		44.5		12.1		44.5					
Change Period (Y+R _c), s	5.0		5.0		5.0		5.0					
Max Green Setting (Gmax), s	18.0		52.0		18.0		52.0					
Max Q Clear Time (g_c+l1), s	7.1		24.0		2.5		32.3					
Green Ext Time (p_c), s	0.5		10.7		0.0		7.3					
Intersection Summary												
HCM 6th Ctrl Delay			8.6									
HCM 6th LOS			A									

LANE SUMMARY

 Site: 101 [Pleasant Street & 16th Street - AM - Import]

 Network: N101 [Pleasant]

New Site
Roundabout

Lane Use and Performance															
	Demand Flows	Arrival Flows			Cap.	Deg. Satn	Lane Util.	Average Delay	Level of Service	95% Back of Queue Veh	Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %	
	Total veh/h	HV %	Total veh/h	HV %	veh/h	v/c	%	sec		Veh	Dist ft				
South: 16th Street															
Lane 1 ^d	82	3.0	82	3.0	909	0.090	100	4.8	LOS A	0.4	9.4	Full	1600	0.0	0.0
Approach	82	3.0	82	3.0	0.090			4.8	LOS A	0.4	9.4				
East: Pleasant Street															
Lane 1 ^d	429	3.0	429	3.0	1295	0.332	100	5.8	LOS A	2.0	50.0	Full	1100	0.0	0.0
Approach	429	3.0	429	3.0	0.332			5.8	LOS A	2.0	50.0				
North: 16th Street															
Lane 1 ^d	16	3.0	16	3.0	839	0.019	100	4.5	LOS A	0.1	1.9	Full	1600	0.0	0.0
Approach	16	3.0	16	3.0	0.019			4.5	LOS A	0.1	1.9				
West: Pleasant Street															
Lane 1 ^d	386	3.0	386	3.0	1237	0.312	100	5.8	LOS A	1.7	44.7	Full	2200	0.0	0.0
Approach	386	3.0	386	3.0	0.312			5.8	LOS A	1.7	44.7				
Intersection	913	3.0	913	3.0	0.332			5.7	LOS A	2.0	50.0				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Network Data dialog (Network tab).
Roundabout LOS Method: Same as Signalled Intersections.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

HCM Delay Formula option is used. Control Delay does not include Geometric Delay since Exclude Geometric Delay option applies.

Gap-Acceptance Capacity: Traditional M1.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Largest change in Average Back of Queue or Degree of Saturation for any lane during the last three iterations: 0.0 %

Number of Iterations: 5 (maximum specified: 10)

^d Dominant lane on roundabout approach

SIDRA INTERSECTION 7.0 | Copyright © 2000-2017 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: A&F ENGINEERING CO., LLC | Processed: Wednesday, October 11, 2017 11:25:20 AM

Project: Z:\2017\17068S - Noblesville, Traffic, Pleasant St. Bridge\SIDRA\Roundabout Alternative - S2B\Roundabout Alternative AM Peak - S2B.sip7

LANE SUMMARY

 Site: 101 [Pleasant Street & 16th Street - PM - Import]

 Network: N101 [Pleasant Street PM Peak - S2B]

New Site
Roundabout

Lane Use and Performance														
	Demand Flows	Arrival Flows			Cap.	Deg. Satn	Lane Util.	Average Delay	Level of Service	95% Back of Queue Veh	Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
	Total veh/h	HV %	Total veh/h	HV %	veh/h	v/c	%	sec		Veh	Dist ft			
South: 16th Street														
Lane 1 ^d	136	3.0	136	3.0	445	0.305	100	13.1	LOS B	1.1	28.0	Full	1600	-10.3 ^{N3} 0.0
Approach	136	3.0	136	3.0		0.305		13.1	LOS B	1.1	28.0			
East: Pleasant Street														
Lane 1 ^d	842	3.0	801	3.0	1265	0.633	100	10.8	LOS B	6.1	156.2	Full	1100	0.0 0.0
Approach	842	3.0	801 ^{N1}	3.0		0.633		10.8	LOS B	6.1	156.2			
North: 16th Street														
Lane 1 ^d	16	3.0	16	3.0	523	0.031	100	7.3	LOS A	0.1	2.7	Full	1600	-5.6 ^{N3} 0.0
Approach	16	3.0	16	3.0		0.031		7.3	LOS A	0.1	2.7			
West: Pleasant Street														
Lane 1 ^d	973	3.0	973	3.0	1036	0.939	100	35.2	LOS D	12.6	322.6	Full	2200	-14.7 ^{N3} 0.0
Approach	973	3.0	973	3.0		0.939		35.2	LOS D	12.6	322.6			
Intersection	1967	3.0	1926 ^{N1}	3.1		0.939		23.3	LOS C	12.6	322.6			

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Network Data dialog (Network tab).

Roundabout LOS Method: Same as Signalised Intersections.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

HCM Delay Formula option is used. Control Delay does not include Geometric Delay since Exclude Geometric Delay option applies.

Gap-Acceptance Capacity: Traditional M1.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Largest change in Average Back of Queue or Degree of Saturation for any lane during the last three iterations: 4.3 %

Number of Iterations: 10 (maximum specified: 10)

^d Dominant lane on roundabout approach

^{N1} Arrival Flow value is reduced due to capacity constraint at oversaturated upstream lanes.

^{N3} Capacity Adjustment due to downstream lane blockage determined by the program.



Lane Group	EBL	EBT	WBL	WBT	NBT	SBT
Lane Group Flow (vph)	6	412	71	394	89	18
v/c Ratio	0.02	0.55	0.18	0.53	0.23	0.05
Control Delay	5.0	9.4	6.5	9.2	7.2	9.3
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	5.0	9.4	6.5	9.2	7.2	9.3
Queue Length 50th (ft)	0	36	5	35	3	1
Queue Length 95th (ft)	3	83	19	80	25	11
Internal Link Dist (ft)		1634		488	467	480
Turn Bay Length (ft)	150		150			
Base Capacity (vph)	891	1670	869	1665	1249	1255
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.01	0.25	0.08	0.24	0.07	0.01

Intersection Summary



Lane Group	EBL	EBT	WBL	WBT	NBT	SBT
Lane Group Flow (vph)	6	1047	94	818	147	18
V/c Ratio	0.02	0.83	0.52	0.65	0.50	0.08
Control Delay	3.4	14.4	17.6	8.3	19.0	22.7
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	3.4	14.4	17.6	8.3	19.0	22.7
Queue Length 50th (ft)	1	198	12	121	20	4
Queue Length 95th (ft)	4	412	60	245	64	20
Internal Link Dist (ft)		1605		527	467	480
Turn Bay Length (ft)	150		150			
Base Capacity (vph)	416	1552	222	1559	551	529
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.01	0.67	0.42	0.52	0.27	0.03

Intersection Summary

QUEUE DISTANCE (%ILE)

Largest 95% Back of Queue Distance for any lane used by vehicle movement (feet)


Network: N101 [Pleasant]

 Site: 101 [Pleasant Street & 16th Street - AM - Import]

New Site
Roundabout

All Movement Classes

	South	East	North	West	Intersection
Vehicle Queue (%ile)	9	50	2	45	50

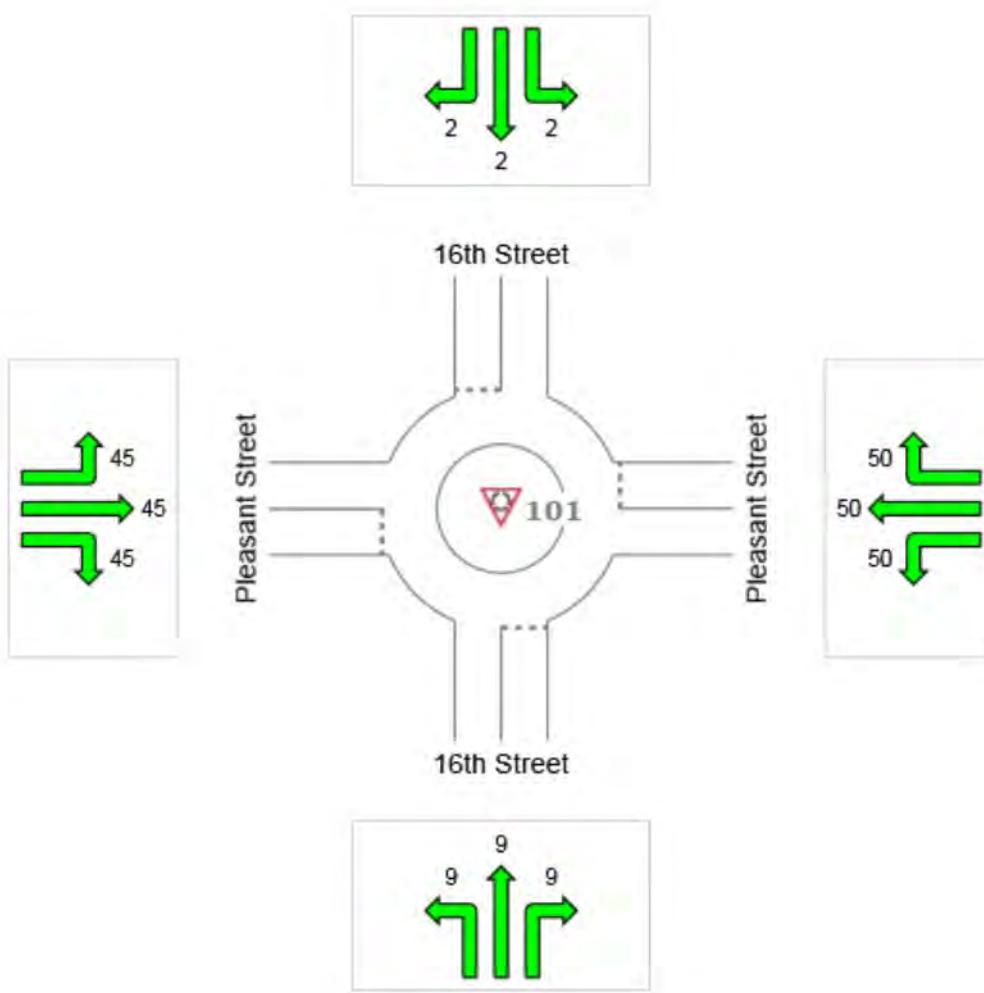

Colour code based on Queue Storage Ratio

[< 0.6]	[0.6 – 0.7]	[0.7 – 0.8]	[0.8 – 0.9]	[0.9 – 1.0]	[> 1.0]
---------	-------------	-------------	-------------	-------------	---------

QUEUE DISTANCE (%ILE)

Largest 95% Back of Queue Distance for any lane used by vehicle movement (feet)


 Site: 101 [Pleasant Street & 16th Street - PM - Import]

 Network: N101 [Pleasant Street PM Peak - S2B]

New Site
Roundabout

All Movement Classes

	South	East	North	West	Intersection
Vehicle Queue (%ile)	28	156	3	323	323

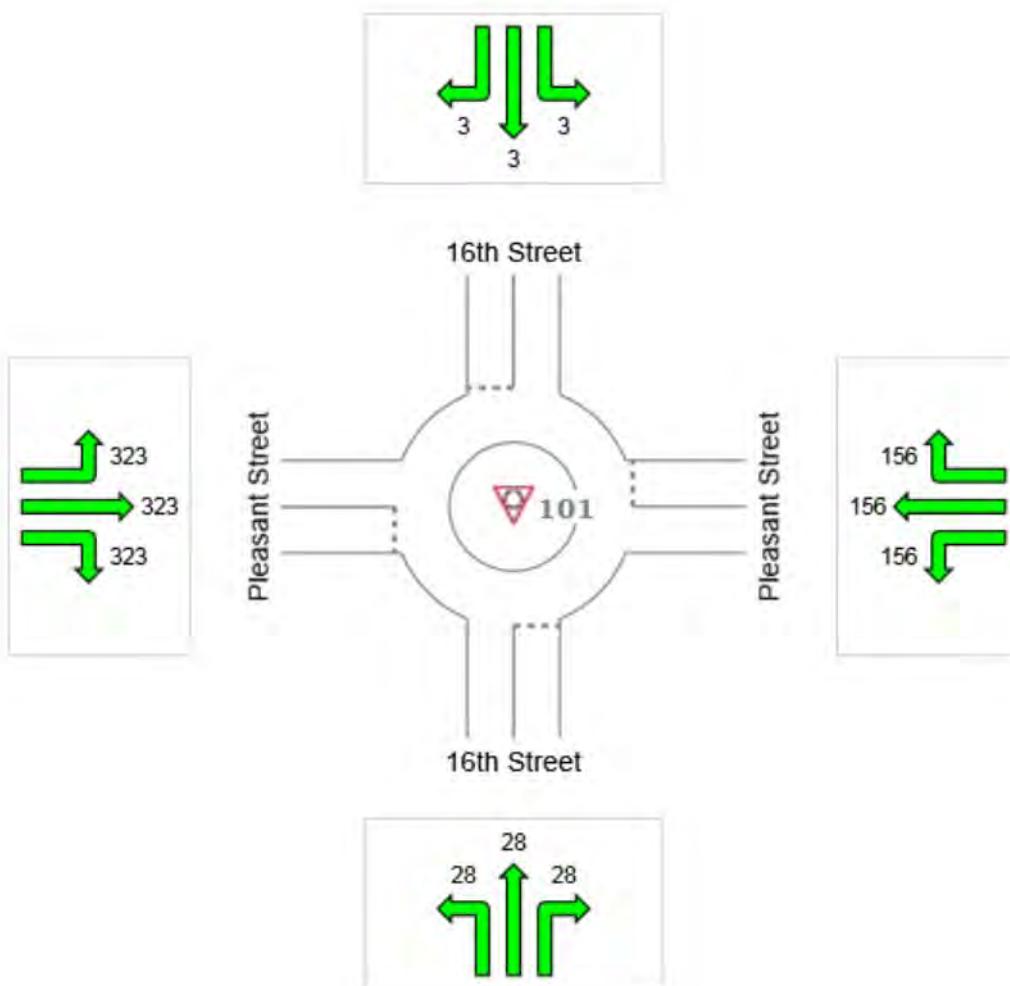

Colour code based on Queue Storage Ratio



PLEASANT STREET & 10TH STREET

TRAFFIC VOLUME COUNTS
CAPACITY ANALYSIS
QUEUE LENGTH ANALYSIS

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :
COUNTED BY :

City of Noblesville
Pleasant Street & 10th Street
9/12/2017
Miovision

	TOTAL VEHICLES (PASSENGER CARS + TRUCKS)											
	AM PEAK HOUR VOLUMES BEGINS 7:30 AM				OFF PEAK HOUR VOLUMES BEGINS				PM PEAK HOUR VOLUMES BEGINS 4:30 PM			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	3	225	28	256					7	375	87	469
SOUTHBOUND	38	233	3	274					67	300	13	380
EASTBOUND	0	161	22	183					0	352	35	387
WESTBOUND	3	133	40	176					2	241	135	378

	PEAK HOUR FACTOR											
	AM PEAK HOUR FACTOR				OFF PEAK HOUR FACTOR				PM PEAK HOUR FACTOR			
	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION
NORTHBOUND	0.77								0.98			
SOUTHBOUND	0.87								0.90			
EASTBOUND	0.86		0.91						0.93			
WESTBOUND	0.88								0.97			0.98

	TRUCK PERCENTAGE											
	AM PEAK HOUR PERCENTAGE				OFF PEAK HOUR PERCENTAGE				PM PEAK HOUR PERCENTAGE			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	0.0%	2.2%	0.0%	2.0%					14.3%	0.3%	1.1%	0.6%
SOUTHBOUND	2.6%	2.6%	0.0%	2.6%					0.0%	1.3%	0.0%	1.1%
EASTBOUND	0.0%	4.3%	4.5%	4.4%					0.0%	0.9%	0.0%	0.8%
WESTBOUND	0.0%	7.5%	5.0%	6.8%					0.0%	1.7%	0.0%	1.1%

HOURLY SUMMARY											
HOUR				NB	SB	NB+SB	EB	WB	EB+WB	TOTAL	
6:00 AM	TO	7:00 AM		65	86	151	37	32	69	220	
7:00 AM	TO	8:00 AM		248	279	527	152	158	310	837	
8:00 AM	TO	9:00 AM		123	129	252	99	80	179	431	
4:00 PM	TO	5:00 PM		230	180	410	195	187	382	792	
5:00 PM	TO	6:00 PM		449	342	791	354	362	716	1507	
6:00 PM	TO	7:00 PM		187	141	328	153	156	309	637	
TOTAL VOLUME				1302	1157	2459	990	975	1965	4424	
PERCENTAGE				29.4%	26.2%	55.6%	22.4%	22.0%	44.4%	100.0%	

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :

City of Noblesville
Pleasant Street & 10th Street
9/12/2017

DIRECTION OF TRAVEL : NORTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	1	1	2	57	3	60	3	0	3	61	4	65
7:00 AM - 8:00 AM	4	0	4	211	13	224	20	0	20	235	13	248
8:00 AM - 9:00 AM	2	0	2	102	2	104	17	0	17	121	2	123
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	2	0	2	189	1	190	38	0	38	229	1	230
5:00 PM - 6:00 PM	12	1	13	355	0	355	80	1	81	447	2	449
6:00 PM - 7:00 PM	10	0	10	157	0	157	20	0	20	187	0	187
PASSENGER	31 93.9%			1071 98.3%			178 99.4%			1280 98.3%		
TRUCK	2 6.1%			19 1.7%			1 0.6%			22 1.7%		
BOTH	33 2.5%			1090 83.7%			179 13.7%			1302 100.0%		

DIRECTION OF TRAVEL : SOUTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	7	1	8	73	4	77	1	0	1	81	5	86
7:00 AM - 8:00 AM	32	2	34	235	4	239	5	1	6	272	7	279
8:00 AM - 9:00 AM	16	0	16	109	3	112	1	0	1	126	3	129
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	36	0	36	136	2	138	6	0	6	178	2	180
5:00 PM - 6:00 PM	62	0	62	262	3	265	15	0	15	339	3	342
6:00 PM - 7:00 PM	33	0	33	102	2	104	4	0	4	139	2	141
PASSENGER	186 98.4%			917 98.1%			32 97.0%			1135 98.1%		
TRUCK	3 1.6%			18 1.9%			1 3.0%			22 1.9%		
BOTH	189 16.3%			935 80.8%			33 2.9%			1157 100.0%		

DIRECTION OF TRAVEL : EASTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	0	0	0	33	2	35	2	0	2	35	2	37
7:00 AM - 8:00 AM	0	0	0	132	8	140	12	0	12	144	8	152
8:00 AM - 9:00 AM	0	0	0	82	3	85	13	1	14	95	4	99
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	0	0	0	171	2	173	22	0	22	193	2	195
5:00 PM - 6:00 PM	0	0	0	324	3	327	27	0	27	351	3	354
6:00 PM - 7:00 PM	1	0	1	141	1	142	10	0	10	152	1	153
PASSENGER	1 100.0%			883 97.9%			86 98.9%			970 98.0%		
TRUCK	0 0.0%			19 2.1%			1 1.1%			20 2.0%		
BOTH	1 0.1%			902 91.1%			87 8.8%			990 100.0%		

DIRECTION OF TRAVEL : WESTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	1	0	1	21	0	21	10	0	10	32	0	32
7:00 AM - 8:00 AM	1	0	1	112	7	119	37	1	38	150	8	158
8:00 AM - 9:00 AM	2	0	2	54	6	60	17	1	18	73	7	80
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	1	0	1	108	3	111	75	0	75	184	3	187
5:00 PM - 6:00 PM	3	0	3	254	1	255	104	0	104	361	1	362
6:00 PM - 7:00 PM	0	0	0	120	0	120	36	0	36	156	0	156
PASSENGER	8 100.0%			669 97.5%			279 99.3%			956 98.1%		
TRUCK	0 0.0%			17 2.5%			2 0.7%			19 1.9%		
BOTH	8 0.8%			686 70.4%			281 28.8%			975 100.0%		

HCM 6th Signalized Intersection Summary Proposed AM - Conventional Intersection (Signal)
 15: 10th St & Pleasant St 10/10/2017



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙ ↖ ↗ ↘ ↙											
Traffic Volume (veh/h)	10	270	70	5	310	40	120	150	40	50	200	40
Future Volume (veh/h)	10	270	70	5	310	40	120	150	40	50	200	40
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No			No			No			No		
Adj Sat Flow, veh/h/ln	1826	1826	1826	1811	1811	1811	1841	1841	1841	1841	1841	1841
Adj Flow Rate, veh/h	11	293	76	5	337	43	130	163	43	54	217	43
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	5	5	5	6	6	6	4	4	4	4	4	4
Cap, veh/h	387	464	120	393	523	67	483	469	124	526	498	99
Arrive On Green	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33
Sat Flow, veh/h	979	1398	363	981	1574	201	1102	1404	370	1157	1492	296
Grp Volume(v), veh/h	11	0	369	5	0	380	130	0	206	54	0	260
Grp Sat Flow(s), veh/h/ln	979	0	1761	981	0	1775	1102	0	1774	1157	0	1788
Q Serve(g_s), s	0.3	0.0	5.3	0.1	0.0	5.4	3.1	0.0	2.6	1.1	0.0	3.4
Cycle Q Clear(g_c), s	5.7	0.0	5.3	5.4	0.0	5.4	6.5	0.0	2.6	3.7	0.0	3.4
Prop In Lane	1.00		0.21	1.00		0.11	1.00		0.21	1.00		0.17
Lane Grp Cap(c), veh/h	387	0	584	393	0	589	483	0	592	526	0	597
V/C Ratio(X)	0.03	0.00	0.63	0.01	0.00	0.64	0.27	0.00	0.35	0.10	0.00	0.44
Avail Cap(c_a), veh/h	913	0	1530	919	0	1542	1000	0	1423	1068	0	1434
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	10.9	0.0	8.4	10.7	0.0	8.5	10.3	0.0	7.5	8.9	0.0	7.8
Incr Delay (d2), s/veh	0.0	0.0	1.1	0.0	0.0	1.2	0.3	0.0	0.3	0.1	0.0	0.5
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	0.0	1.4	0.0	0.0	1.5	0.6	0.0	0.7	0.2	0.0	0.9	
Unsig. Movement Delay, s/veh												
LnGrp Delay(d), s/veh	11.0	0.0	9.6	10.8	0.0	9.7	10.6	0.0	7.9	9.0	0.0	8.3
LnGrp LOS	B	A	A	B	A	A	B	A	A	A	A	A
Approach Vol, veh/h	380			385			336			314		
Approach Delay, s/veh	9.6			9.7			8.9			8.4		
Approach LOS	A			A			A			A		
Timer - Assigned Phs	2		4		6		8					
Phs Duration (G+Y+R _c), s	15.0		14.9		15.0		14.9					
Change Period (Y+R _c), s	5.0		5.0		5.0		5.0					
Max Green Setting (Gmax), s	24.0		26.0		24.0		26.0					
Max Q Clear Time (g_c+l1), s	8.5		7.7		5.7		7.4					
Green Ext Time (p_c), s	1.5		2.2		1.6		2.3					
Intersection Summary												
HCM 6th Ctrl Delay			9.2									
HCM 6th LOS			A									

HCM 6th Signalized Intersection Summary Proposed PM - Conventional Intersection (Signal)
 15: 10th St & Pleasant St 10/27/2017



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗	↖ ↗		↖ ↗	↖ ↗		↖ ↗	↖ ↗		↖ ↗	↖ ↗	
Traffic Volume (veh/h)	5	730	80	5	600	130	60	370	110	50	250	20
Future Volume (veh/h)	5	730	80	5	600	130	60	370	110	50	250	20
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No			No			No			No		
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	5	793	87	5	652	141	65	402	120	54	272	22
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	196	828	91	146	745	161	345	461	138	173	569	46
Arrive On Green	0.50	0.50	0.50	0.50	0.50	0.50	0.33	0.33	0.33	0.33	0.33	0.33
Sat Flow, veh/h	684	1656	182	631	1490	322	1085	1383	413	880	1707	138
Grp Volume(v), veh/h	5	0	880	5	0	793	65	0	522	54	0	294
Grp Sat Flow(s), veh/h/ln	684	0	1838	631	0	1812	1085	0	1796	880	0	1846
Q Serve(g_s), s	0.4	0.0	27.6	0.5	0.0	23.3	3.0	0.0	16.4	3.6	0.0	7.6
Cycle Q Clear(g_c), s	23.7	0.0	27.6	28.0	0.0	23.3	10.6	0.0	16.4	20.0	0.0	7.6
Prop In Lane	1.00		0.10	1.00		0.18	1.00		0.23	1.00		0.07
Lane Grp Cap(c), veh/h	196	0	919	146	0	906	345	0	599	173	0	615
V/C Ratio(X)	0.03	0.00	0.96	0.03	0.00	0.88	0.19	0.00	0.87	0.31	0.00	0.48
Avail Cap(c_a), veh/h	196	0	919	146	0	906	345	0	599	173	0	615
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	23.9	0.0	14.4	27.8	0.0	13.3	20.1	0.0	18.8	28.2	0.0	15.9
Incr Delay (d2), s/veh	0.1	0.0	20.1	0.1	0.0	9.6	0.3	0.0	13.3	1.0	0.0	0.6
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	0.1	0.0	14.3	0.1	0.0	10.1	0.7	0.0	8.3	0.8	0.0	3.0
Unsig. Movement Delay, s/veh												
LnGrp Delay(d), s/veh	23.9	0.0	34.5	27.9	0.0	22.9	20.3	0.0	32.1	29.2	0.0	16.4
LnGrp LOS	C	A	C	C	A	C	C	A	C	C	A	B
Approach Vol, veh/h		885			798			587			348	
Approach Delay, s/veh		34.5			22.9			30.8			18.4	
Approach LOS		C			C			C			B	
Timer - Assigned Phs		2		4		6		8				
Phs Duration (G+Y+R _c), s		25.0		35.0		25.0		35.0				
Change Period (Y+R _c), s		5.0		5.0		5.0		5.0				
Max Green Setting (Gmax), s		20.0		30.0		20.0		30.0				
Max Q Clear Time (g_c+l1), s		18.4		29.6		22.0		30.0				
Green Ext Time (p_c), s		0.6		0.3		0.0		0.0				
Intersection Summary												
HCM 6th Ctrl Delay			28.0									
HCM 6th LOS			C									

LANE SUMMARY

 Site: 101 [Pleasant Street & 10th Street - AM]

 Network: N101 [Pleasant Street AM Peak - S2A]

New Site
Roundabout

Lane Use and Performance															
	Demand Flows	Arrival Flows			Cap.	Deg. Satn	Lane Util.	Average Delay	Level of Service	95% Back of Queue Veh	Lane Config	Lane Length	Cap. Adj.	Prob. Block.	
	Total veh/h	HV %	Total veh/h	HV %	veh/h	v/c	%	sec		Veh	Dist ft	ft	%	%	
South: 10th Street															
Lane 1	130	3.0	130	3.0	933	0.140	100	5.2	LOS A	0.5	13.7	Short	200	0.0	NA
Lane 2 ^d	207	3.0	207	3.0	1007	0.205	100	5.5	LOS A	0.8	20.8	Full	1600	0.0	0.0
Approach	337	3.0	337	3.0	0.205			5.4	LOS A	0.8	20.8				
East: Pleasant Street															
Lane 1	186	3.0	186	3.0	982	0.189	100	5.5	LOS A	0.8	19.6	Short	350	0.0	NA
Lane 2 ^d	200	3.0	200	3.0	1056	0.189	100	5.1	LOS A	0.8	19.2	Full	2200	0.0	0.0
Approach	386	3.0	386	3.0	0.189			5.3	LOS A	0.8	19.6				
North: 10th Street															
Lane 1	54	3.0	54	3.0	855	0.064	100	4.8	LOS A	0.2	5.6	Short	200	0.0	NA
Lane 2 ^d	261	3.0	261	3.0	929	0.281	100	6.8	LOS A	1.1	28.4	Full	1600	0.0	0.0
Approach	315	3.0	315	3.0	0.281			6.4	LOS A	1.1	28.4				
West: Pleasant Street															
Lane 1 ^d	226	3.0	226	3.0	1082	0.209	100	5.2	LOS A	0.8	21.6	Full	670	0.0	0.0
Lane 2	155	3.0	155	3.0	1008	0.154	74 ⁶	5.0	LOS A	0.6	15.5	Full	670	0.0	0.0
Approach	380	3.0	380	3.0	0.209			5.1	LOS A	0.8	21.6				
Intersection	1418	3.0	1418	3.0	0.281			5.5	LOS A	1.1	28.4				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Network Data dialog (Network tab). Roundabout LOS Method: Same as Signalised Intersections.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

HCM Delay Formula option is used. Control Delay does not include Geometric Delay since Exclude Geometric Delay option applies.

Gap-Accentuation Capacity: Traditional M1.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Largest change in Average Back of Queue or Degree of Saturation for any lane during the last three iterations: 0.1 %

Number of Iterations: 5 (maximum specified: 10)

⁶ Lane under-utilisation due to downstream effects

^d Dominant lane on roundabout approach

LANE SUMMARY

 Site: 101 [Pleasant Street & 10th Street - PM]

 Network: N101 [Pleasant Street PM Peak - S2A]

New Site
Roundabout

Lane Use and Performance															
	Demand Flows	Arrival Flows			Cap.	Deg. Satn	Lane Util.	Average Delay	Level of Service	95% Back of Queue Veh	Lane Config	Lane Length	Cap. Adj.	Prob. Block.	
	Total veh/h	HV %	Total veh/h	HV %	veh/h	v/c	%	sec		Veh	Dist ft	ft	%	%	
South: 10th Street															
Lane 1	65	3.0	65	3.0	584	0.112	14 ⁵	7.5	LOS A	0.4	9.8	Short	200	0.0	NA
Lane 2 ^d	522	3.0	522	3.0	653	0.799	100	27.7	LOS C	6.5	166.2	Full	1600	0.0	0.0
Approach	587	3.0	587	3.0	0.799			25.5	LOS C	6.5	166.2				
East: Pleasant Street															
Lane 1	383	3.0	383	3.0	837	0.457	100	10.1	LOS B	2.4	60.9	Short	350	0.0	NA
Lane 2 ^d	416	3.0	416	3.0	911	0.457	100	9.5	LOS A	2.3	60.0	Full	2200	0.0	0.0
Approach	799	3.0	799	3.0	0.457			9.8	LOS A	2.4	60.9				
North: 10th Street															
Lane 1	54	3.0	54	3.0	675	0.081	20 ⁵	6.2	LOS A	0.3	7.0	Short	200	0.0	NA
Lane 2 ^d	293	3.0	293	3.0	746	0.393	100	9.9	LOS A	1.7	43.5	Full	1600	0.0	0.0
Approach	348	3.0	348	3.0	0.393			9.3	LOS A	1.7	43.5				
West: Pleasant Street															
Lane 1 ^d	526	3.0	526	3.0	1031	0.510	100	9.6	LOS A	2.9	74.9	Full	670	0.0	0.0
Lane 2	360	3.0	360	3.0	957	0.376	74 ⁶	7.9	LOS A	1.8	45.6	Full	670	0.0	0.0
Approach	886	3.0	886	3.0	0.510			8.9	LOS A	2.9	74.9				
Intersection	2620	3.0	2620	3.0	0.799			13.0	LOS B	6.5	166.2				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Network Data dialog (Network tab). Roundabout LOS Method: Same as Signalised Intersections.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

HCM Delay Formula option is used. Control Delay does not include Geometric Delay since Exclude Geometric Delay option applies.

Gap-Accentuation Capacity: Traditional M1.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Largest change in Average Back of Queue or Degree of Saturation for any lane during the last three iterations: 0.1 %

Number of Iterations: 5 (maximum specified: 10)

⁵ Lane under-utilisation found by the program

⁶ Lane under-utilisation due to downstream effects


^d Dominant lane on roundabout approach

Queues

15: 10th St & Pleasant St


Proposed AM - Conventional Intersection (Signal)

10/27/2017



Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	11	369	5	380	130	206	54	260
v/c Ratio	0.02	0.40	0.01	0.42	0.34	0.32	0.13	0.40
Control Delay	7.5	9.3	7.4	9.7	13.0	10.2	10.4	11.3
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	7.5	9.3	7.4	9.7	13.0	10.2	10.4	11.3
Queue Length 50th (ft)	1	41	1	44	16	22	6	30
Queue Length 95th (ft)	8	121	5	129	60	74	28	96
Internal Link Dist (ft)		588		845		466		510
Turn Bay Length (ft)	100		100		100		75	
Base Capacity (vph)	773	1402	774	1407	821	1335	862	1342
Starvation Cap Reductn	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.01	0.26	0.01	0.27	0.16	0.15	0.06	0.19

Intersection Summary



Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	5	880	5	793	65	522	54	294
V/c Ratio	0.04	0.95	0.04	0.86	0.22	0.87	0.42	0.49
Control Delay	8.6	35.9	8.8	24.6	16.7	35.6	27.5	18.8
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	8.6	35.9	8.8	24.6	16.7	35.6	27.5	18.8
Queue Length 50th (ft)	1	278	1	226	17	163	15	80
Queue Length 95th (ft)	6	#525	6	#447	43	#325	#48	143
Internal Link Dist (ft)		588		845		466		510
Turn Bay Length (ft)	100		100		100		75	
Base Capacity (vph)	139	960	132	954	321	640	137	642
Starvation Cap Reductn	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.04	0.92	0.04	0.83	0.20	0.82	0.39	0.46

Intersection Summary

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

QUEUE DISTANCE (%ILE)

Largest 95% Back of Queue Distance for any lane used by vehicle movement (feet)


 Site: 101 [Pleasant Street & 10th Street - AM]

 Network: N101 [Plesant Street AM Peak - S2A]

New Site
Roundabout

All Movement Classes

	South	East	North	West	Intersection
Vehicle Queue (%ile)	21	20	28	22	28

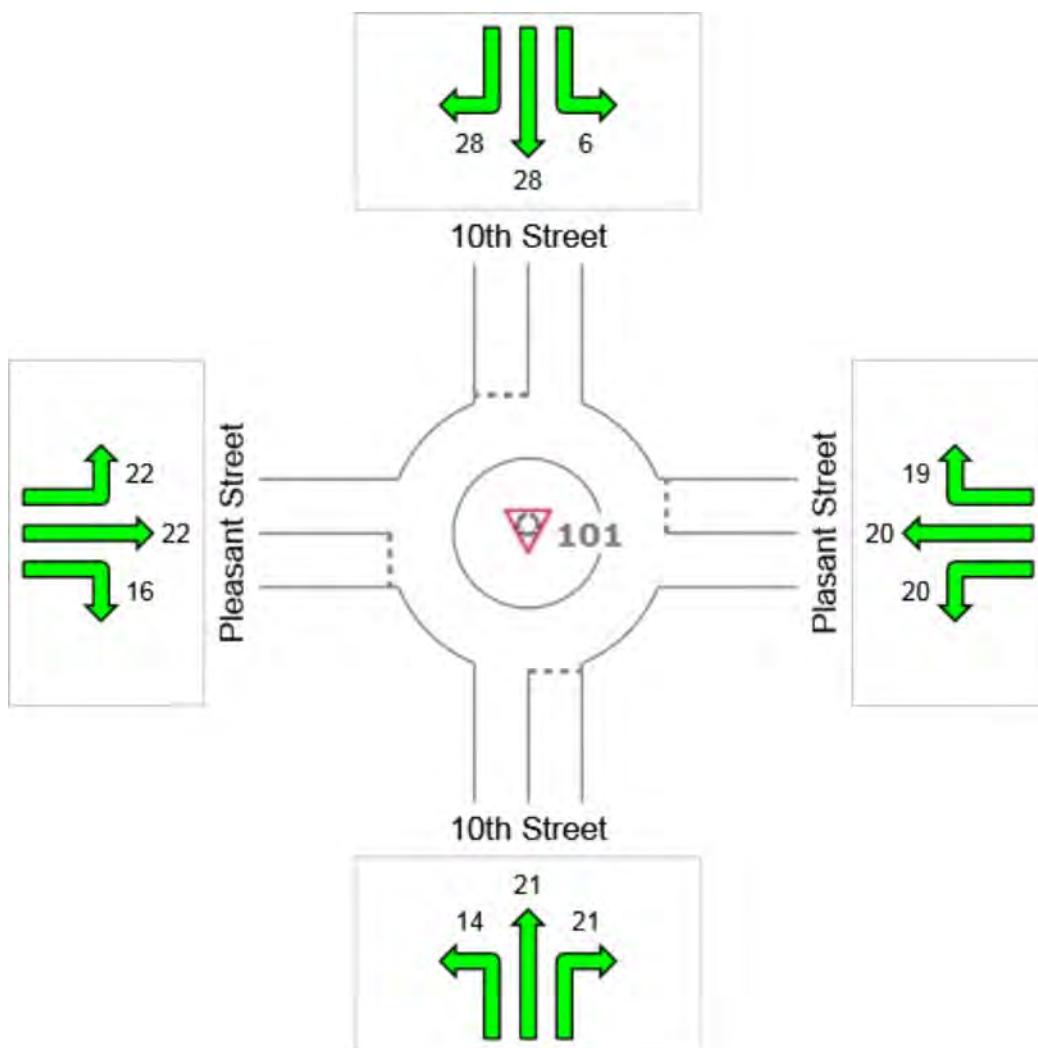

Colour code based on Queue Storage Ratio



QUEUE DISTANCE (%ILE)

Largest 95% Back of Queue Distance for any lane used by vehicle movement (feet)


 Site: 101 [Pleasant Street & 10th Street - PM]

 Network: N101 [Pleasant Street PM Peak - S2A]

New Site
Roundabout

All Movement Classes

	South	East	North	West	Intersection
Vehicle Queue (%ile)	166	61	44	75	166

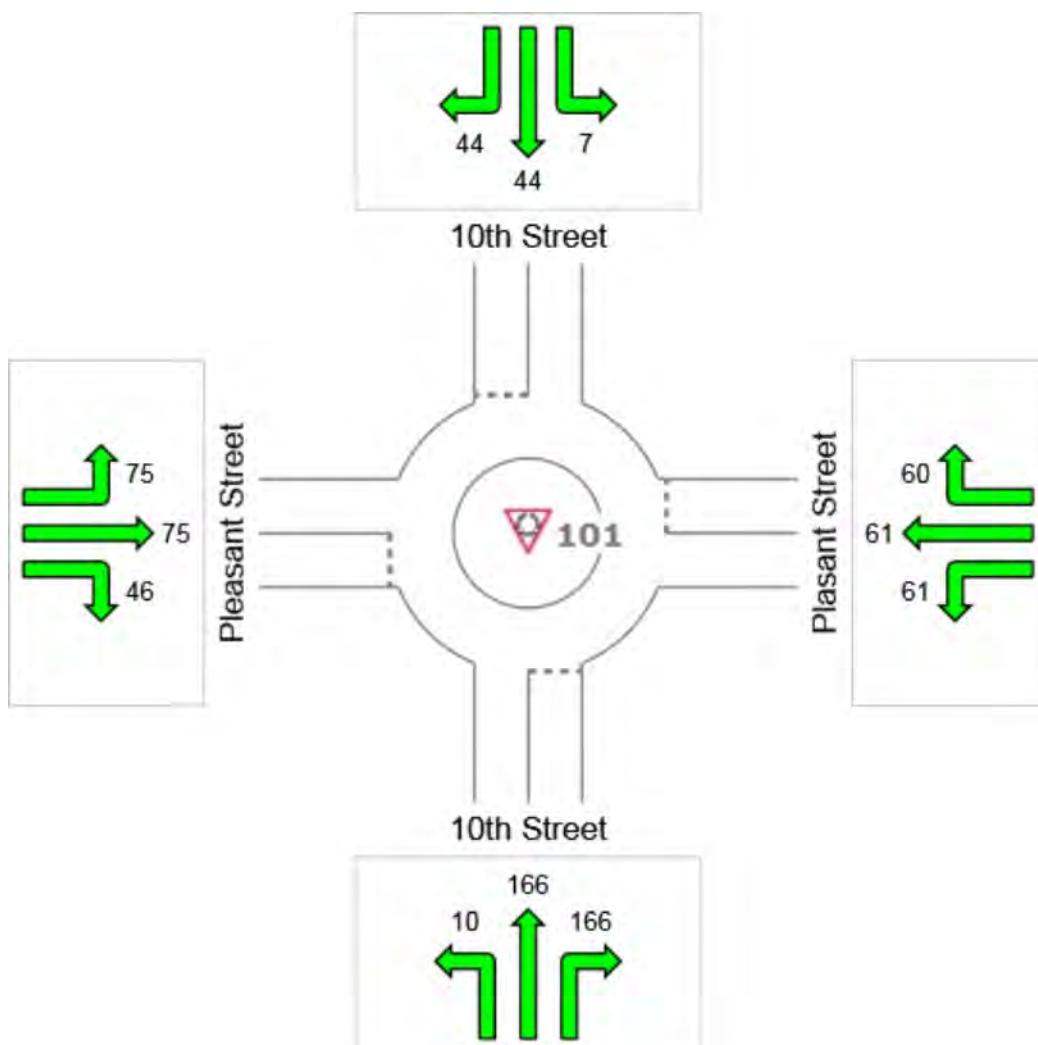

Colour code based on Queue Storage Ratio

[< 0.6]	[0.6 – 0.7]	[0.7 – 0.8]	[0.8 – 0.9]	[0.9 – 1.0]	[> 1.0]
---------	-------------	-------------	-------------	-------------	---------

PLEASANT STREET & 8TH STREET

TRAFFIC VOLUME COUNTS
CAPACITY ANALYSIS
QUEUE LENGTH ANALYSIS

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :
COUNTED BY :

City of Noblesville
Pleasant Street & 8th Street
9/12/2017
Miovision

	TOTAL VEHICLES (PASSENGER CARS + TRUCKS)											
	AM PEAK HOUR VOLUMES BEGINS 7:15 AM				OFF PEAK HOUR VOLUMES BEGINS				PM PEAK HOUR VOLUMES BEGINS 4:30 PM			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	1	264	13	278					9	398	35	442
SOUTHBOUND	126	442	8	576					309	471	5	785
EASTBOUND	1	9	6	16					2	1	4	7
WESTBOUND	13	14	82	109					10	5	162	177

	PEAK HOUR FACTOR											
	AM PEAK HOUR FACTOR				OFF PEAK HOUR FACTOR				PM PEAK HOUR FACTOR			
	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION
NORTHBOUND	0.94								0.94			
SOUTHBOUND	0.93								0.96			
EASTBOUND	0.57		0.96						0.58			
WESTBOUND	0.88								0.85			

	TRUCK PERCENTAGE											
	AM PEAK HOUR PERCENTAGE				OFF PEAK HOUR PERCENTAGE				PM PEAK HOUR PERCENTAGE			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
NORTHBOUND	0.0%	4.9%	38.5%	6.5%					0.0%	1.0%	0.0%	0.9%
SOUTHBOUND	1.6%	2.9%	12.5%	2.8%					1.3%	1.3%	0.0%	1.3%
EASTBOUND	0.0%	11.1%	0.0%	6.3%					0.0%	0.0%	0.0%	0.0%
WESTBOUND	46.2%	14.3%	2.4%	9.2%					30.0%	20.0%	0.6%	2.8%

HOURLY SUMMARY												
HOUR				NB	SB	NB+SB	EB	WB	EB+WB	TOTAL		
6:00 AM	TO	7:00 AM		122	210	332	0	21	21	353		
7:00 AM	TO	8:00 AM		280	554	834	14	100	114	948		
8:00 AM	TO	9:00 AM		149	278	427	7	50	57	484		
4:00 PM	TO	5:00 PM		231	391	622	2	78	80	702		
5:00 PM	TO	6:00 PM		399	750	1149	17	207	224	1373		
6:00 PM	TO	7:00 PM		148	300	448	6	107	113	561		
TOTAL VOLUME				1329	2483	3812	46	563	609	4421		
PERCENTAGE				30.1%	56.2%	86.2%	1.0%	12.7%	13.8%	100.0%		

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :

City of Noblesville
Pleasant Street & 8th Street
9/12/2017

DIRECTION OF TRAVEL : NORTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	2	0	2	115	3	118	0	2	2	117	5	122
7:00 AM - 8:00 AM	1	0	1	256	11	267	6	6	12	263	17	280
8:00 AM - 9:00 AM	2	0	2	132	10	142	4	1	5	138	11	149
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	5	0	5	201	3	204	22	0	22	228	3	231
5:00 PM - 6:00 PM	11	0	11	370	2	372	16	0	16	397	2	399
6:00 PM - 7:00 PM	3	0	3	137	4	141	4	0	4	144	4	148
PASSENGER	24 100.0%			1211 97.3%			52 85.2%			1287 96.8%		
TRUCK	0 0.0%			33 2.7%			9 14.8%			42 3.2%		
BOTH	24 1.8%			1244 93.6%			61 4.6%			1329 100.0%		

DIRECTION OF TRAVEL : SOUTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	33	0	33	175	1	176	1	0	1	209	1	210
7:00 AM - 8:00 AM	120	3	123	415	10	425	5	1	6	540	14	554
8:00 AM - 9:00 AM	74	2	76	194	5	199	3	0	3	271	7	278
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	152	2	154	229	5	234	3	0	3	384	7	391
5:00 PM - 6:00 PM	288	3	291	450	3	453	6	0	6	744	6	750
6:00 PM - 7:00 PM	128	2	130	164	4	168	2	0	2	294	6	300
PASSENGER	795 98.5%			1627 98.3%			20 95.2%			2442 98.3%		
TRUCK	12 1.5%			28 1.7%			1 4.8%			41 1.7%		
BOTH	807 32.5%			1655 66.7%			21 0.8%			2483 100.0%		

DIRECTION OF TRAVEL : EASTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0
7:00 AM - 8:00 AM	1	0	1	8	0	8	5	0	5	14	0	14
8:00 AM - 9:00 AM	0	0	0	1	1	2	5	0	5	6	1	7
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	1	0	1	0	0	0	1	0	1	2	0	2
5:00 PM - 6:00 PM	3	0	3	10	0	10	4	0	4	17	0	17
6:00 PM - 7:00 PM	2	0	2	3	0	3	0	1	1	5	1	6
PASSENGER	7 100.0%			22 95.7%			15 93.8%			44 95.7%		
TRUCK	0 0.0%			1 4.3%			1 6.3%			2 4.3%		
BOTH	7 15.2%			23 50.0%			16 34.8%			46 100.0%		

DIRECTION OF TRAVEL : WESTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	6	0	6	3	0	3	11	1	12	20	1	21
7:00 AM - 8:00 AM	8	6	14	11	1	12	73	1	74	92	8	100
8:00 AM - 9:00 AM	2	2	4	4	1	5	37	4	41	43	7	50
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
4:00 PM - 5:00 PM	4	2	6	3	1	4	68	0	68	75	3	78
5:00 PM - 6:00 PM	3	1	4	9	0	9	193	1	194	205	2	207
6:00 PM - 7:00 PM	2	0	2	9	0	9	96	0	96	107	0	107
PASSENGER	25 69.4%			39 92.9%			478 98.6%			542 96.3%		
TRUCK	11 30.6%			3 7.1%			7 1.4%			21 3.7%		
BOTH	36 6.4%			42 7.5%			485 86.1%			563 100.0%		

HCM 6th Signalized Intersection Summary
16: 8th St & Pleasant St

Proposed AM - Conventional Intersection
10/10/2017

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑ ↗	↑ ↘		↑ ↗	↑ ↘		↑ ↗	↑ ↘		↑ ↗	↑ ↘	
Traffic Volume (veh/h)	5	240	290	30	350	100	180	150	30	90	270	10
Future Volume (veh/h)	5	240	290	30	350	100	180	150	30	90	270	10
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No			No			No			No		
Adj Sat Flow, veh/h/ln	1826	1826	1826	1811	1811	1811	1841	1841	1841	1841	1841	1841
Adj Flow Rate, veh/h	6	276	333	34	402	115	207	172	34	103	310	11
Peak Hour Factor	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
Percent Heavy Veh, %	5	5	5	6	6	6	4	4	4	4	4	4
Cap, veh/h	292	332	400	208	597	171	374	400	79	433	387	14
Arrive On Green	0.44	0.44	0.44	0.44	0.44	0.44	0.12	0.27	0.27	0.07	0.22	0.22
Sat Flow, veh/h	863	753	909	786	1354	387	1753	1493	295	1753	1767	63
Grp Volume(v), veh/h	6	0	609	34	0	517	207	0	206	103	0	321
Grp Sat Flow(s), veh/h/ln	863	0	1662	786	0	1741	1753	0	1788	1753	0	1829
Q Serve(g_s), s	0.3	0.0	20.2	2.5	0.0	14.7	5.4	0.0	5.9	2.8	0.0	10.4
Cycle Q Clear(g_c), s	15.1	0.0	20.2	22.7	0.0	14.7	5.4	0.0	5.9	2.8	0.0	10.4
Prop In Lane	1.00		0.55	1.00		0.22	1.00		0.17	1.00		0.03
Lane Grp Cap(c), veh/h	292	0	732	208	0	767	374	0	480	433	0	400
V/C Ratio(X)	0.02	0.00	0.83	0.16	0.00	0.67	0.55	0.00	0.43	0.24	0.00	0.80
Avail Cap(c_a), veh/h	410	0	959	315	0	1005	395	0	688	484	0	645
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	19.9	0.0	15.4	25.4	0.0	13.9	16.1	0.0	18.9	17.0	0.0	23.1
Incr Delay (d2), s/veh	0.0	0.0	4.9	0.4	0.0	1.1	1.5	0.0	0.6	0.3	0.0	3.8
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	0.1	0.0	7.5	0.5	0.0	5.2	2.1	0.0	2.4	1.1	0.0	4.6
Unsig. Movement Delay, s/veh												
LnGrp Delay(d), s/veh	19.9	0.0	20.3	25.8	0.0	15.0	17.7	0.0	19.5	17.3	0.0	26.8
LnGrp LOS	B	A	C	C	A	B	B	A	B	B	A	C
Approach Vol, veh/h		615			551			413			424	
Approach Delay, s/veh		20.3			15.7			18.6			24.5	
Approach LOS		C			B			B			C	
Timer - Assigned Phs	1	2		4	5	6		8				
Phs Duration (G+Y+R _c), s	8.2	21.7		32.5	11.2	18.7		32.5				
Change Period (Y+R _c), s	4.0	5.0		5.0	4.0	5.0		5.0				
Max Green Setting (Gmax), s	24.0		36.0	8.0	22.0		36.0					
Max Q Clear Time (g_c+l1), s	7.8	7.9		22.2	7.4	12.4		24.7				
Green Ext Time (p_c), s	0.0	1.0		3.8	0.0	1.3		2.8				
Intersection Summary												
HCM 6th Ctrl Delay		19.6										
HCM 6th LOS		B										

HCM 6th Signalized Intersection Summary Proposed PM - Conventional Intersection (Signal)
 16: 8th St & Pleasant St 10/27/2017



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗	↖ ↗		↖ ↗	↖ ↗		↖ ↗	↖ ↗		↖ ↗	↖ ↗	
Traffic Volume (veh/h)	5	490	290	20	520	140	190	330	30	290	260	10
Future Volume (veh/h)	5	490	290	20	520	140	190	330	30	290	260	10
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No			No			No			No		
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	6	563	333	23	598	161	218	379	34	333	299	11
Peak Hour Factor	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	144	529	313	72	682	184	385	405	36	341	537	20
Arrive On Green	0.48	0.48	0.48	0.48	0.48	0.48	0.08	0.24	0.24	0.14	0.30	0.30
Sat Flow, veh/h	706	1102	652	621	1419	382	1781	1691	152	1781	1793	66
Grp Volume(v), veh/h	6	0	896	23	0	759	218	0	413	333	0	310
Grp Sat Flow(s), veh/h/ln	706	0	1753	621	0	1802	1781	0	1843	1781	0	1858
Q Serve(g_s), s	0.8	0.0	48.0	0.0	0.0	37.8	8.0	0.0	21.9	13.8	0.0	14.0
Cycle Q Clear(g_c), s	38.6	0.0	48.0	48.0	0.0	37.8	8.0	0.0	21.9	13.8	0.0	14.0
Prop In Lane	1.00		0.37	1.00		0.21	1.00		0.08	1.00		0.04
Lane Grp Cap(c), veh/h	144	0	842	72	0	865	385	0	442	341	0	557
V/C Ratio(X)	0.04	0.00	1.06	0.32	0.00	0.88	0.57	0.00	0.93	0.98	0.00	0.56
Avail Cap(c_a), veh/h	144	0	842	72	0	865	385	0	442	341	0	558
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	40.7	0.0	26.0	50.0	0.0	23.3	27.9	0.0	37.2	25.5	0.0	29.4
Incr Delay (d2), s/veh	0.1	0.0	49.6	2.5	0.0	10.2	1.9	0.0	27.2	42.2	0.0	1.2
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	0.1	0.0	30.3	0.6	0.0	17.6	0.8	0.0	13.0	9.6	0.0	6.3
Unsig. Movement Delay, s/veh												
LnGrp Delay(d), s/veh	40.8	0.0	75.6	52.5	0.0	33.5	29.8	0.0	64.4	67.7	0.0	30.6
LnGrp LOS	D	A	F	D	A	C	C	A	E	E	A	C
Approach Vol, veh/h												
Approach Delay, s/veh	902				782			631			643	
Approach LOS	75.4				34.1			52.4			49.8	
Timer - Assigned Phs	1	2		4	5	6		8				
Phs Duration (G+Y+Rc), s	8.0	29.0		53.0	12.0	35.0		53.0				
Change Period (Y+Rc), s	4.0	5.0		5.0	4.0	5.0		5.0				
Max Green Setting (Gmax), s	24.0			48.0	8.0	30.0		48.0				
Max Q Clear Time (g_c+Rc), s	23.9			50.0	10.0	16.0		50.0				
Green Ext Time (p_c), s	0.0	0.0		0.0	0.0	1.5		0.0				
Intersection Summary												
HCM 6th Ctrl Delay				54.0								
HCM 6th LOS				D								

LANE SUMMARY

 Site: 101 [Pleasant Street & 8th Street - AM]

 Network: N101 [Pleasant Street AM Peak - S2A]

New Site
Roundabout

Lane Use and Performance															
	Demand Flows	Arrival Flows			Cap.	Deg. Satn	Lane Util.	Average Delay	Level of Service	95% Back of Queue Veh	Lane Config	Lane Length ft	Cap. Adj.	Prob. Block.	
	Total veh/h	HV %	Total veh/h	HV %	veh/h	v/c	%	sec		Veh	Dist ft		ft	%	%
South: 8th Street															
Lane 1	196	3.0	196	3.0	928	0.211	100	6.0	LOS A	0.9	21.9	Short	200	0.0	NA
Lane 2 ^d	196	3.0	196	3.0	1002	0.195	100	5.4	LOS A	0.8	19.6	Full	1600	0.0	0.0
Approach	391	3.0	391	3.0	0.211			5.7	LOS A	0.9	21.9				
East: Pleasant Street															
Lane 1 ^d	355	3.0	355	3.0	1002	0.354	100	7.3	LOS A	1.6	41.0	Full	670	0.0	0.0
Lane 2	166	3.0	166	3.0	928	0.179	51 ⁶	5.6	LOS A	0.7	18.1	Full	670	0.0	0.0
Approach	522	3.0	522	3.0	0.354			6.8	LOS A	1.6	41.0				
North: 8th Street															
Lane 1	98	3.0	98	3.0	736	0.133	100	6.3	LOS A	0.5	12.3	Short	200	0.0	NA
Lane 2 ^d	304	3.0	304	3.0	809	0.376	100	9.0	LOS A	1.7	42.3	Full	1600	0.0	0.0
Approach	402	3.0	402	3.0	0.376			8.3	LOS A	1.7	42.3				
West: Pleasant Street															
Lane 1	266	3.0	266	3.0	877	0.304	92 ⁵	7.4	LOS A	1.3	33.3	Short	200	0.0	NA
Lane 2 ^d	315	3.0	315	3.0	951	0.331	100	7.3	LOS A	1.4	36.7	Full	4169	0.0	0.0
Approach	582	3.0	582	3.0	0.331			7.4	LOS A	1.4	36.7				
Intersection	1897	3.0	1897	3.0	0.376			7.1	LOS A	1.7	42.3				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Network Data dialog (Network tab). Roundabout LOS Method: Same as Signalised Intersections.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

HCM Delay Formula option is used. Control Delay does not include Geometric Delay since Exclude Geometric Delay option applies.

Gap-Accentuation Capacity: Traditional M1.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Largest change in Average Back of Queue or Degree of Saturation for any lane during the last three iterations: 0.1 %

Number of Iterations: 5 (maximum specified: 10)

⁵ Lane under-utilisation found by the program

⁶ Lane under-utilisation due to downstream effects

^d Dominant lane on roundabout approach

LANE SUMMARY

 Site: 101 [Pleasant Street & 8th Street - PM]

 Network: N101 [Pleasant Street PM Peak - S2A]

New Site
Roundabout

Lane Use and Performance															
	Demand Flows	Arrival Flows			Cap.	Deg. Satn	Lane Util.	Average Delay	Level of Service	95% Back of Queue Veh	Lane Config	Lane Length ft	Cap. Adj.	Prob. Block.	
	Total veh/h	HV %	Total veh/h	HV %	veh/h	v/c	%	sec		Veh	Dist ft		ft	%	%
South: 8th Street															
Lane 1	207	3.0	207	3.0	584	0.354	100	11.3	LOS B	1.5	37.1	Short	200	0.0	NA
Lane 2 ^d	391	3.0	391	3.0	653	0.599	100	16.4	LOS B	3.4	86.1	Full	4169	0.0	0.0
Approach	598	3.0	598	3.0	0.599			14.6	LOS B	3.4	86.1				
East: Pleasant Street															
Lane 1 ^d	442	3.0	442	3.0	837	0.528	100	11.7	LOS B	3.0	76.5	Full	670	0.0	0.0
Lane 2	297	3.0	297	3.0	763	0.389	74 ⁶	9.6	LOS A	1.8	45.5	Full	670	0.0	0.0
Approach	739	3.0	739	3.0	0.528			10.8	LOS B	3.0	76.5				
North: 8th Street															
Lane 1 ^d	315	3.0	315	3.0	688	0.458	100	11.9	LOS B	2.2	55.5	Short	200	0.0	NA
Lane 2	293	3.0	293	3.0	618	0.475	100	13.4	LOS B	2.3	59.0	Full	1600	0.0	0.0
Approach	609	3.0	609	3.0	0.475			12.6	LOS B	2.3	59.0				
West: Pleasant Street															
Lane 1	406	3.0	406	3.0	729	0.558	100	13.8	LOS B	3.3	83.4	Short	350	0.0	NA
Lane 2 ^d	447	3.0	447	3.0	801	0.558	100	12.8	LOS B	3.2	83.2	Full	4169	0.0	0.0
Approach	853	3.0	853	3.0	0.558			13.3	LOS B	3.3	83.4				
Intersection	2799	3.0	2799	3.0	0.599			12.8	LOS B	3.4	86.1				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Network Data dialog (Network tab). Roundabout LOS Method: Same as Signalised Intersections.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

HCM Delay Formula option is used. Control Delay does not include Geometric Delay since Exclude Geometric Delay option applies.

Gap-Accentuation Capacity: Traditional M1.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Largest change in Average Back of Queue or Degree of Saturation for any lane during the last three iterations: 0.1 %

Number of Iterations: 5 (maximum specified: 10)

⁶ Lane under-utilisation due to downstream effects


^d Dominant lane on roundabout approach

Queues

16: 8th St & Pleasant St

Proposed AM - Conventional Intersection (Signal)

10/27/2017



Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	6	609	34	517	207	206	103	321
V/c Ratio	0.03	0.84	0.26	0.73	0.52	0.35	0.22	0.71
Control Delay	12.8	26.6	19.6	22.8	18.6	21.2	14.0	33.1
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	12.8	26.6	19.6	22.8	18.6	21.2	14.0	33.1
Queue Length 50th (ft)	1	178	9	160	50	63	23	117
Queue Length 95th (ft)	8	320	30	276	106	128	57	216
Internal Link Dist (ft)		355		588		474		528
Turn Bay Length (ft)	100		100		65		100	
Base Capacity (vph)	285	994	186	1003	397	689	470	638
Starvation Cap Reductn	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.02	0.61	0.18	0.52	0.52	0.30	0.22	0.50


Intersection Summary

Queues

16: 8th St & Pleasant St

Proposed PM - Conventional Intersection (Signal)

10/27/2017



Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	6	896	23	759	218	413	333	310
v/c Ratio	0.06	1.03	0.31	0.86	0.60	0.94	1.02	0.56
Control Delay	15.8	65.1	29.8	34.6	28.5	68.9	82.2	34.0
Queue Delay	0.0	0.0	0.0	0.7	0.0	0.0	0.0	0.0
Total Delay	15.8	65.1	29.8	35.3	28.5	68.9	82.2	34.0
Queue Length 50th (ft)	2	~604	9	407	88	256	~167	164
Queue Length 95th (ft)	9	#795	32	#607	137	#416	#326	241
Internal Link Dist (ft)		355		588		474		528
Turn Bay Length (ft)	100		100		65		100	
Base Capacity (vph)	108	868	74	878	365	446	326	559
Starvation Cap Reductn	0	0	0	20	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.06	1.03	0.31	0.88	0.60	0.93	1.02	0.55

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

QUEUE DISTANCE (%ILE)

Largest 95% Back of Queue Distance for any lane used by vehicle movement (feet)


 Site: 101 [Pleasant Street & 8th Street - AM]

 Network: N101 [Pleasant Street AM Peak - S2A]

New Site
Roundabout

All Movement Classes

	South	East	North	West	Intersection
Vehicle Queue (%ile)	22	41	42	37	42

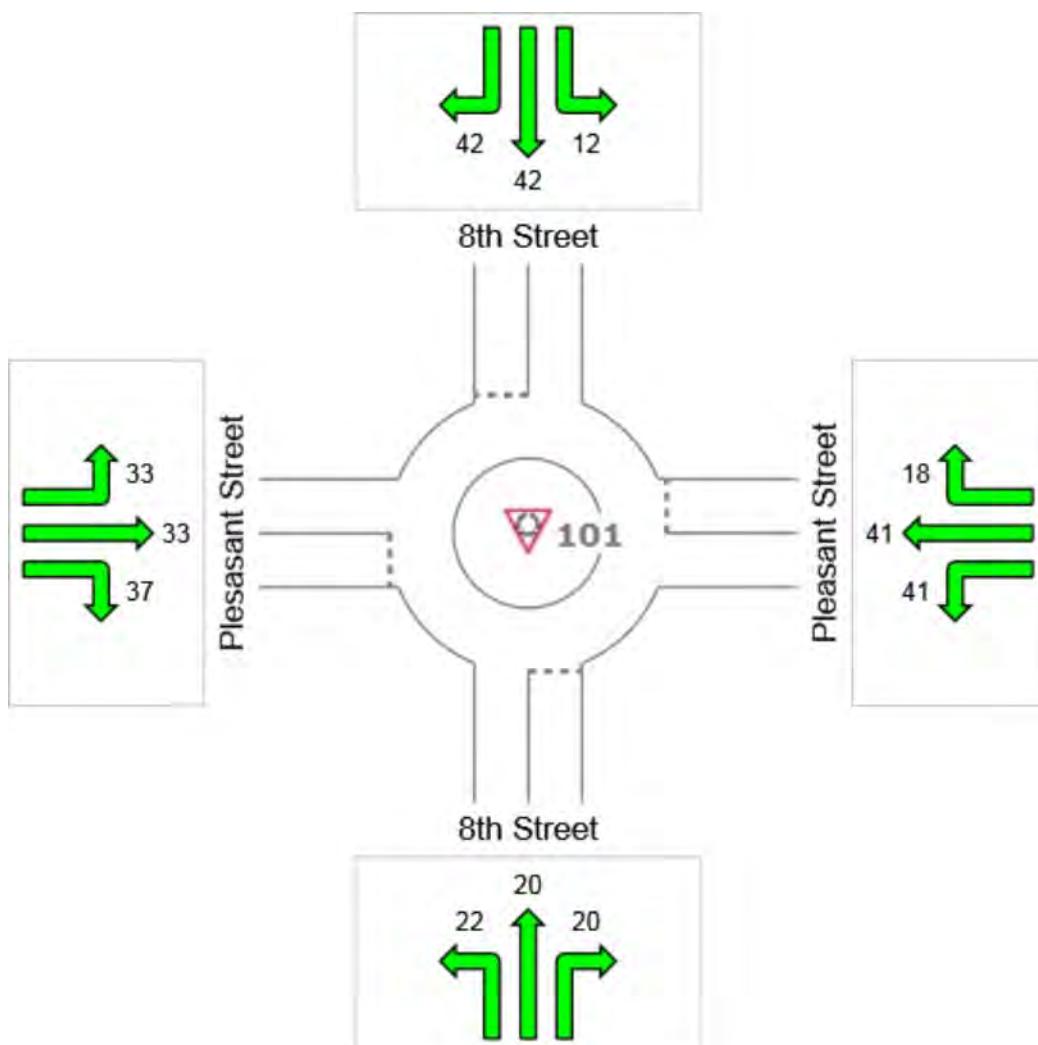

Colour code based on Queue Storage Ratio



QUEUE DISTANCE (%ILE)

Largest 95% Back of Queue Distance for any lane used by vehicle movement (feet)


 Site: 101 [Pleasant Street & 8th Street - PM]

 Network: N101 [Pleasant Street PM Peak - S2A]

New Site
Roundabout

All Movement Classes

	South	East	North	West	Intersection
Vehicle Queue (%ile)	86	77	59	83	86

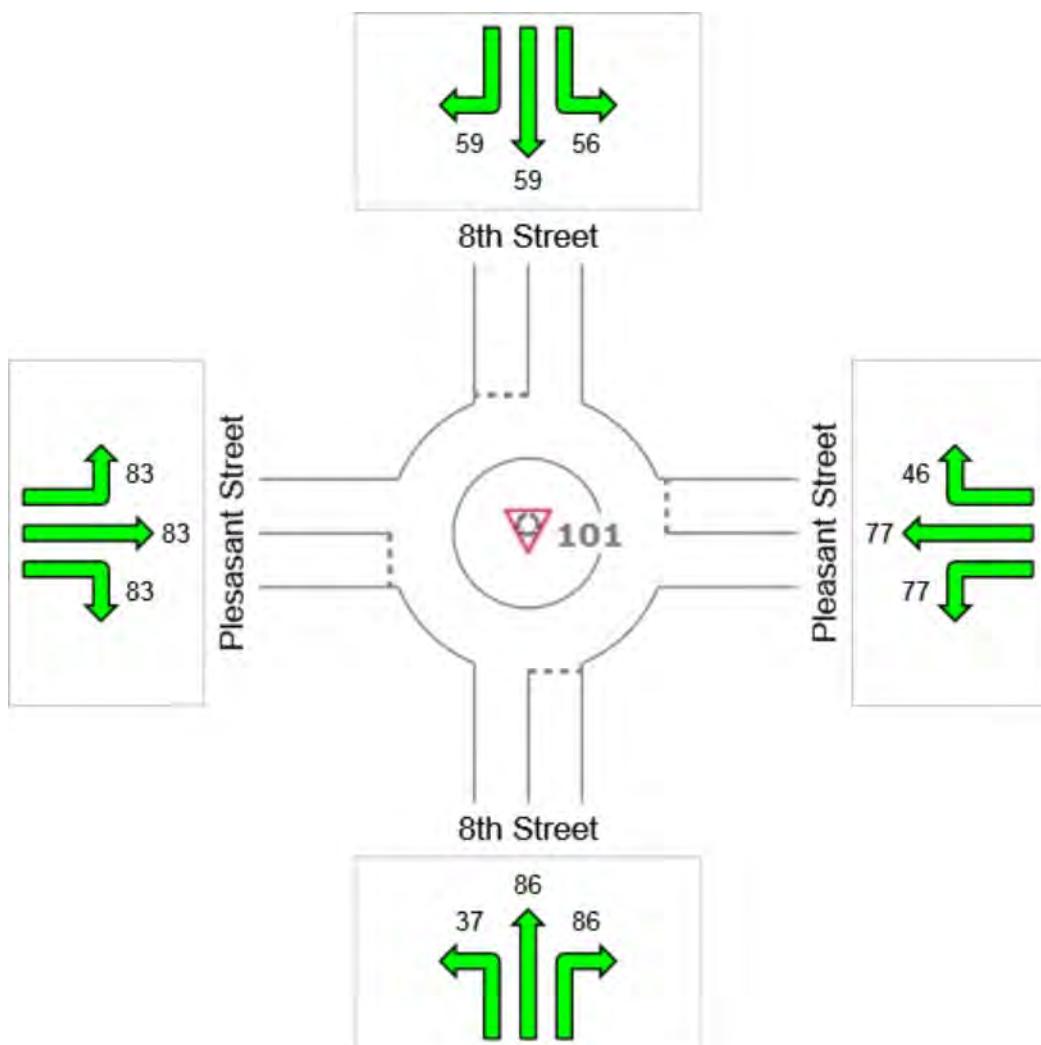

Colour code based on Queue Storage Ratio



PLEASANT STREET & RIVER ROAD

CAPACITY ANALYSIS
QUEUE LENGTH ANALYSIS

HCM 6th Signalized Intersection Summary Proposed AM - Conventional Intersection (Signal)
 40: River Rd & Pleasant St 10/27/2017

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↓		↑	↓		↑	↓		↑	↓	
Traffic Volume (veh/h)	5	320	60	50	170	140	70	90	60	60	160	5
Future Volume (veh/h)	5	320	60	50	170	140	70	90	60	60	160	5
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach		No			No			No			No	
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	5	348	65	54	185	152	76	98	65	65	174	5
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	389	476	89	367	341	280	365	169	112	367	279	8
Arrive On Green	0.01	0.31	0.31	0.06	0.36	0.36	0.07	0.16	0.16	0.06	0.15	0.15
Sat Flow, veh/h	1781	1533	286	1781	950	780	1781	1049	696	1781	1809	52
Grp Volume(v), veh/h	5	0	413	54	0	337	76	0	163	65	0	179
Grp Sat Flow(s), veh/h/ln	1781	0	1819	1781	0	1730	1781	0	1745	1781	0	1861
Q Serve(g_s), s	0.1	0.0	8.9	0.9	0.0	6.8	1.5	0.0	3.8	1.3	0.0	3.9
Cycle Q Clear(g_c), s	0.1	0.0	8.9	0.9	0.0	6.8	1.5	0.0	3.8	1.3	0.0	3.9
Prop In Lane	1.00		0.16	1.00		0.45	1.00		0.40	1.00		0.03
Lane Grp Cap(c), veh/h	389	0	564	367	0	620	365	0	280	367	0	287
V/C Ratio(X)	0.01	0.00	0.73	0.15	0.00	0.54	0.21	0.00	0.58	0.18	0.00	0.62
Avail Cap(c_a), veh/h	621	0	1497	514	0	1424	486	0	958	500	0	1021
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	10.5	0.0	13.5	10.0	0.0	11.2	14.0	0.0	17.0	14.1	0.0	17.3
Incr Delay (d2), s/veh	0.0	0.0	1.9	0.2	0.0	0.7	0.3	0.0	1.9	0.2	0.0	2.2
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	0.0	0.0	3.2	0.3	0.0	2.2	0.5	0.0	1.5	0.5	0.0	1.6
Unsig. Movement Delay, s/veh												
LnGrp Delay(d), s/veh	10.5	0.0	15.3	10.2	0.0	11.9	14.3	0.0	18.9	14.3	0.0	19.5
LnGrp LOS	B	A	B	B	A	B	B	A	B	B	A	B
Approach Vol, veh/h		418			391			239			244	
Approach Delay, s/veh		15.3			11.7			17.4			18.1	
Approach LOS		B			B			B			B	
Timer - Assigned Phs	1	2	3	4	5	6	7	8				
Phs Duration (G+Y+R _c), s	6.7	12.0	6.4	18.6	7.0	11.7	4.3	20.7				
Change Period (Y+R _c), s	4.0	5.0	4.0	5.0	4.0	5.0	4.0	5.0				
Max Green Setting (Gmax), s	6.0	24.0	6.0	36.0	6.0	24.0	6.0	36.0				
Max Q Clear Time (g_c+l1), s	3.3	5.8	2.9	10.9	3.5	5.9	2.1	8.8				
Green Ext Time (p_c), s	0.0	0.8	0.0	2.7	0.0	0.9	0.0	2.2				
Intersection Summary												
HCM 6th Ctrl Delay			15.1									
HCM 6th LOS			B									

HCM 6th Signalized Intersection Summary Proposed PM - Conventional Intersection (Signal)
 40: River Rd & Pleasant St 10/27/2017



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗	↖ ↗		↖ ↗	↖ ↗		↖ ↗	↖ ↗		↖ ↗	↖ ↗	
Traffic Volume (veh/h)	5	360	60	30	250	270	120	240	70	120	170	5
Future Volume (veh/h)	5	360	60	30	250	270	120	240	70	120	170	5
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No			No			No			No		
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	5	391	65	33	272	293	130	261	76	130	185	5
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	203	564	94	317	321	345	431	327	95	316	426	12
Arrive On Green	0.01	0.36	0.36	0.04	0.39	0.39	0.08	0.23	0.23	0.08	0.23	0.23
Sat Flow, veh/h	1781	1564	260	1781	824	887	1781	1392	405	1781	1813	49
Grp Volume(v), veh/h	5	0	456	33	0	565	130	0	337	130	0	190
Grp Sat Flow(s), veh/h/ln	1781	0	1824	1781	0	1711	1781	0	1797	1781	0	1862
Q Serve(g_s), s	0.1	0.0	13.1	0.7	0.0	18.6	3.3	0.0	10.9	3.3	0.0	5.4
Cycle Q Clear(g_c), s	0.1	0.0	13.1	0.7	0.0	18.6	3.3	0.0	10.9	3.3	0.0	5.4
Prop In Lane	1.00		0.14	1.00		0.52	1.00		0.23	1.00		0.03
Lane Grp Cap(c), veh/h	203	0	658	317	0	666	431	0	422	316	0	437
V/C Ratio(X)	0.02	0.00	0.69	0.10	0.00	0.85	0.30	0.00	0.80	0.41	0.00	0.43
Avail Cap(c_a), veh/h	364	0	1034	428	0	970	466	0	728	351	0	754
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	14.7	0.0	16.8	12.9	0.0	17.2	16.0	0.0	22.2	16.8	0.0	20.1
Incr Delay (d2), s/veh	0.0	0.0	1.3	0.1	0.0	4.9	0.4	0.0	3.5	0.9	0.0	0.7
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	0.0	5.2	0.3	0.0	7.3	1.3	0.0	4.7	1.3	0.0	2.2	
Unsig. Movement Delay, s/veh												
LnGrp Delay(d), s/veh	14.7	0.0	18.1	13.1	0.0	22.1	16.4	0.0	25.7	17.7	0.0	20.8
LnGrp LOS	B	A	B	B	A	C	B	A	C	B	A	C
Approach Vol, veh/h		461			598			467			320	
Approach Delay, s/veh		18.1			21.6			23.1			19.5	
Approach LOS		B			C			C			B	
Timer - Assigned Phs	1	2	3	4	5	6	7	8				
Phs Duration (G+Y+R _c), s	8.8	19.5	6.2	27.3	8.8	19.5	4.4	29.0				
Change Period (Y+R _c), s	4.0	5.0	4.0	5.0	4.0	5.0	4.0	5.0				
Max Green Setting (Gmax _g), s	25.0	6.0	35.0	6.0	25.0	6.0	35.0					
Max Q Clear Time (g _c +l _q), s	12.9	2.7	15.1	5.3	7.4	2.1	20.6					
Green Ext Time (p _c), s	0.0	1.6	0.0	2.9	0.0	0.9	0.0	3.4				
Intersection Summary												
HCM 6th Ctrl Delay			20.7									
HCM 6th LOS			C									

LANE SUMMARY

 Site: 101 [Pleasant Street & River Road- AM]

 Network: N101 [Pleasant Street AM Peak - S2A]

New Site
Roundabout

Lane Use and Performance															
	Demand Flows	Arrival Flows			Cap.	Deg. Satn	Lane Util.	Average Delay	Level of Service	95% Back of Queue Veh	Lane Config	Lane Length	Cap. Adj.	Prob. Block.	
	Total veh/h	HV %	Total veh/h	HV %	veh/h	v/c	%	sec		Veh	Dist ft	ft	%	%	
South: 8th Street															
Lane 1 ^d	239	2.0	239	2.0	875	0.273	100	7.0	LOS A	1.3	32.3	Full	1600	0.0	0.0
Approach	239	2.0	239	2.0		0.273		7.0	LOS A	1.3	32.3				
East: Pleasant Street															
Lane 1 ^d	391	2.0	391	2.0	1123	0.349	100	6.7	LOS A	1.9	49.5	Full	4169	0.0	0.0
Approach	391	2.0	391	2.0		0.349		6.7	LOS A	1.9	49.5				
North: 8th Street															
Lane 1 ^d	245	2.0	245	2.0	975	0.251	100	6.2	LOS A	1.2	30.3	Full	1600	0.0	0.0
Approach	245	2.0	245	2.0		0.251		6.2	LOS A	1.2	30.3				
West: Pleasant Street															
Lane 1 ^d	418	2.0	418	2.0	997	0.420	100	8.3	LOS A	2.4	60.2	Full	3692	0.0	0.0
Approach	418	2.0	418	2.0		0.420		8.3	LOS A	2.4	60.2				
Intersection	1293	2.0	1293	2.0		0.420		7.2	LOS A	2.4	60.2				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Network Data dialog (Network tab).
Roundabout LOS Method: Same as Signalised Intersections.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

HCM Delay Formula option is used. Control Delay does not include Geometric Delay since Exclude Geometric Delay option applies.

Gap-Acceptance Capacity: Traditional M1.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Largest change in Average Back of Queue or Degree of Saturation for any lane during the last three iterations: 0.1 %

Number of Iterations: 5 (maximum specified: 10)

^d Dominant lane on roundabout approach

SIDRA INTERSECTION 7.0 | Copyright © 2000-2017 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: A&F ENGINEERING CO., LLC | Processed: Tuesday, October 24, 2017 9:07:44 AM

Project: Z:\2017\17068S - Noblesville, Traffic, Pleasant St. Bridge\SIDRA\Final Scenario\Roundabout Alternative AM Peak - S2A.sip7

LANE SUMMARY

 Site: 101 [Pleasant Street & River Road- PM]

 Network: N101 [Pleasant Street PM Peak - S2A]

New Site
Roundabout

Lane Use and Performance															
	Demand Flows	Arrival Flows			Cap.	Deg. Satn	Lane Util.	Average Delay	Level of Service	95% Back of Queue Veh	Lane Config	Lane Length	Cap. Adj.	Prob. Block.	
	Total veh/h	HV %	Total veh/h	HV %	veh/h	v/c	%	sec		Veh	Dist ft	ft	%	%	
South: 8th Street															
Lane 1 ^d	467	2.0	467	2.0	782	0.598	100	14.2	LOS B	4.3	109.3	Full	1600	0.0	0.0
Approach	467	2.0	467	2.0		0.598		14.2	LOS B	4.3	109.3				
East: Pleasant Street															
Lane 1 ^d	598	2.0	598	2.0	895	0.668	100	15.0	LOS B	6.0	151.6	Full	4169	0.0	0.0
Approach	598	2.0	598	2.0		0.668		15.0	LOS B	6.0	151.6				
North: 8th Street															
Lane 1 ^d	321	2.0	321	2.0	861	0.373	100	8.5	LOS A	1.9	47.4	Full	1600	0.0	0.0
Approach	321	2.0	321	2.0		0.373		8.5	LOS A	1.9	47.4				
West: Pleasant Street															
Lane 1 ^d	462	2.0	462	2.0	942	0.490	100	9.9	LOS A	3.1	77.6	Full	3692	0.0	0.0
Approach	462	2.0	462	2.0		0.490		9.9	LOS A	3.1	77.6				
Intersection	1848	2.0	1848	2.0		0.668		12.4	LOS B	6.0	151.6				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Network Data dialog (Network tab).

Roundabout LOS Method: Same as Signalised Intersections.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

HCM Delay Formula option is used. Control Delay does not include Geometric Delay since Exclude Geometric Delay option applies.

Gap-Acceptance Capacity: Traditional M1.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Largest change in Average Back of Queue or Degree of Saturation for any lane during the last three iterations: 0.1 %

Number of Iterations: 5 (maximum specified: 10)

^d Dominant lane on roundabout approach

SIDRA INTERSECTION 7.0 | Copyright © 2000-2017 Akcelik and Associates Pty Ltd | sidrasolutions.com


Organisation: A&F ENGINEERING CO., LLC | Processed: Tuesday, October 24, 2017 9:53:17 AM

Project: Z:\2017\17068S - Noblesville, Traffic, Pleasant St. Bridge\SIDRA\Final Scenario\Roundabout Alternative PM Peak - S2A.sip7

Queues
40: River Rd & Pleasant St

Proposed AM - Conventional Intersection (Signal)

10/27/2017




Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	5	413	54	337	76	163	65	179
v/c Ratio	0.01	0.47	0.10	0.35	0.16	0.30	0.13	0.37
Control Delay	8.4	18.3	9.1	11.8	14.9	19.5	14.8	25.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	8.4	18.3	9.1	11.8	14.9	19.5	14.8	25.0
Queue Length 50th (ft)	1	126	9	59	17	40	15	58
Queue Length 95th (ft)	6	237	28	170	51	104	45	130
Internal Link Dist (ft)		2246		2402		771		764
Turn Bay Length (ft)	100		100		100		100	
Base Capacity (vph)	620	1247	531	1205	500	932	517	970
Starvation Cap Reductn	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.01	0.33	0.10	0.28	0.15	0.17	0.13	0.18

Intersection Summary

Queues
40: River Rd & Pleasant St

Proposed PM - Conventional Intersection (Signal)

10/27/2017



Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	5	456	33	565	130	337	130	190
v/c Ratio	0.02	0.64	0.09	0.75	0.27	0.66	0.37	0.37
Control Delay	11.0	22.9	11.5	23.4	16.4	29.9	18.0	24.7
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	11.0	22.9	11.5	23.4	16.4	29.9	18.0	24.7
Queue Length 50th (ft)	1	131	7	159	28	108	28	58
Queue Length 95th (ft)	7	306	23	#422	86	255	86	146
Internal Link Dist (ft)		2246		2402		771		764
Turn Bay Length (ft)	100		100		100		100	
Base Capacity (vph)	322	1103	380	1079	475	791	354	807
Starvation Cap Reductn	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.02	0.41	0.09	0.52	0.27	0.43	0.37	0.24

Intersection Summary

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

QUEUE DISTANCE (%ILE)

Largest 95% Back of Queue Distance for any lane used by vehicle movement (feet)


 Site: 101 [Pleasant Street & River Road- AM]

 Network: N101 [Pleasant Street AM Peak - S2A]

New Site
Roundabout

All Movement Classes

	South	East	North	West	Intersection
Vehicle Queue (%ile)	32	49	30	60	60

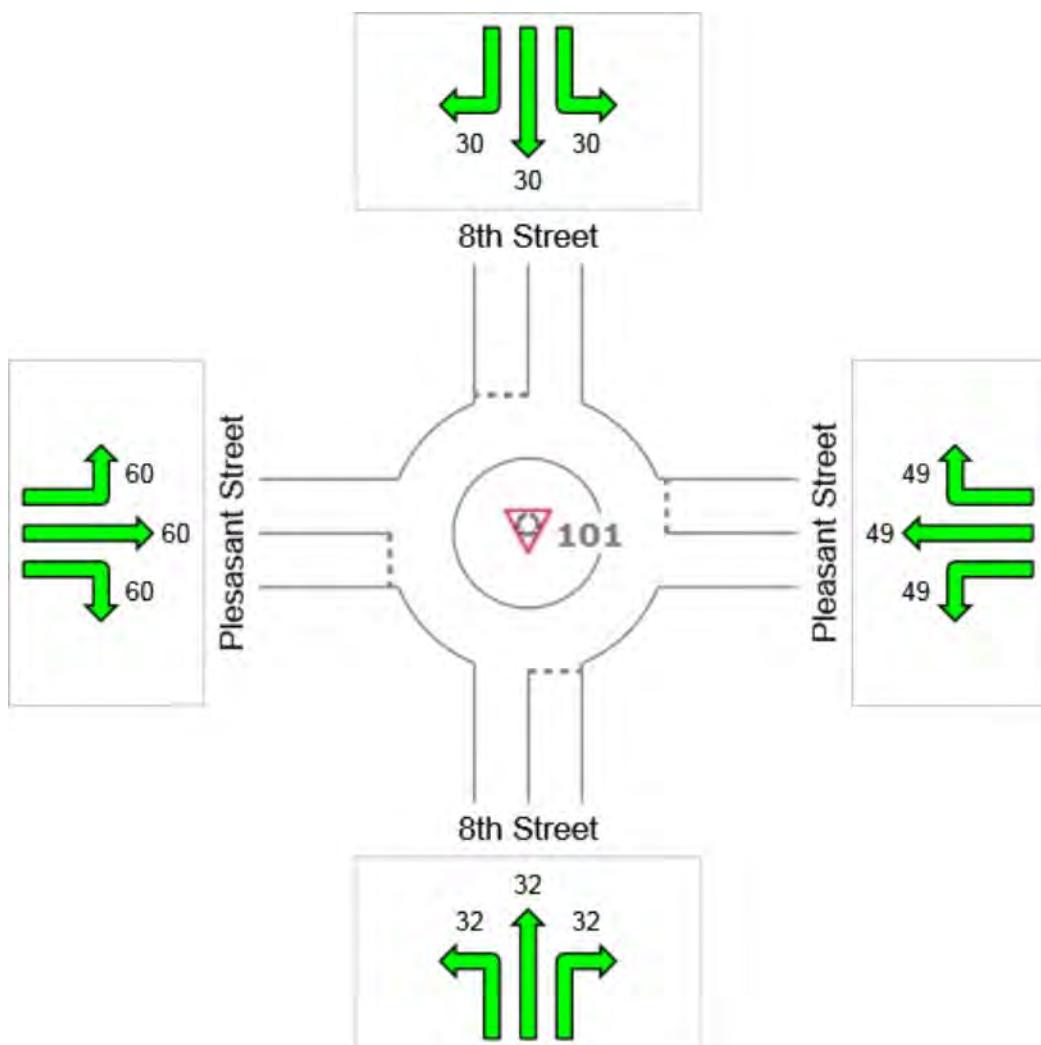

Colour code based on Queue Storage Ratio



QUEUE DISTANCE (%ILE)

Largest 95% Back of Queue Distance for any lane used by vehicle movement (feet)


 Site: 101 [Pleasant Street & River Road- PM]

 Network: N101 [Pleasant Street PM Peak - S2A]

New Site
Roundabout

All Movement Classes

	South	East	North	West	Intersection
Vehicle Queue (%ile)	109	152	47	78	152

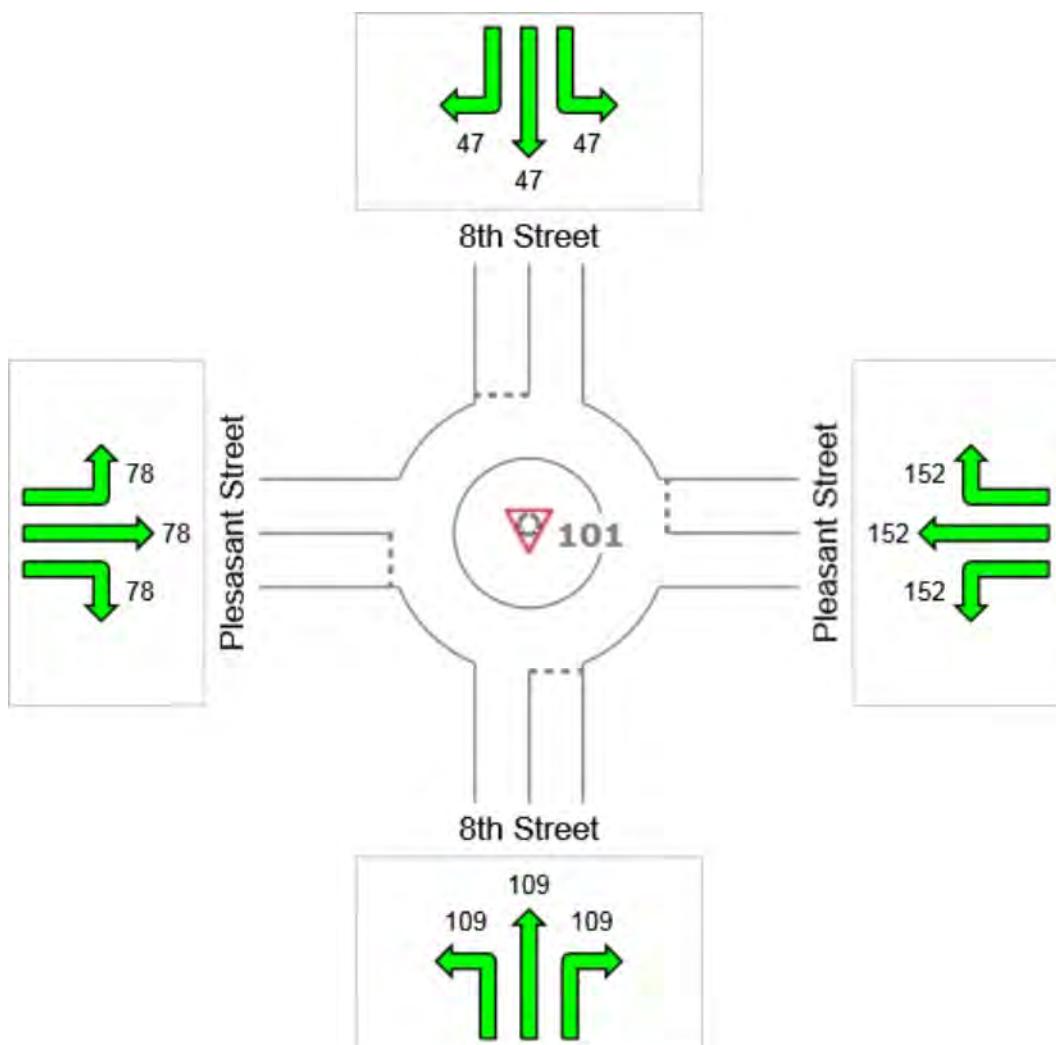

Colour code based on Queue Storage Ratio



SR 32 & HAGUE ROAD/PLEASANT STREET

TRAFFIC VOLUME COUNTS
CAPACITY ANALYSIS
QUEUE LENGTH ANALYSIS

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :
COUNTED BY :

City of Noblesville
SR 32 & Hague Road
9/6/2017
Miovision

	TOTAL VEHICLES (PASSENGER CARS + TRUCKS)											
	AM PEAK HOUR VOLUMES BEGINS 7:00 AM				OFF PEAK HOUR VOLUMES BEGINS 2:00 PM				PM PEAK HOUR VOLUMES BEGINS 5:00 PM			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
SOUTHBOUND	42		257	299	35		90	125	41		139	180
EASTBOUND	94		625	719	113		647	760	299		794	1093
WESTBOUND			779	809			682	735			752	869

	PEAK HOUR FACTOR					
	AM PEAK HOUR FACTOR			OFF PEAK HOUR FACTOR		PM PEAK HOUR FACTOR
	APPROACH	INTERSECTION	APPROACH	INTERSECTION	APPROACH	INTERSECTION
SOUTHBOUND	0.83		0.82		0.80	
EASTBOUND	0.91	0.94	0.84	0.85	0.98	
WESTBOUND	0.91		0.86		0.91	0.94

	TRUCK PERCENTAGE											
	AM PEAK HOUR PERCENTAGE				OFF PEAK HOUR PERCENTAGE				PM PEAK HOUR PERCENTAGE			
	L	T	R	TOTAL	L	T	R	TOTAL	L	T	R	TOTAL
SOUTHBOUND	0.0%		2.7%	5.0%	8.6%		11.1%	23.2%	4.9%		2.9%	8.9%
EASTBOUND	12.8%		6.6%	8.8%	8.8%		10.4%	14.1%	1.7%		2.6%	3.2%
WESTBOUND			7.6%	10.0%	8.2%		9.8%	10.3%	2.8%		1.7%	3.1%

HOURLY SUMMARY												
HOUR			NB	SB	NB+SB	EB	WB	EB+WB	TOTAL			
6:00 AM	TO	7:00 AM		154	154	326	488	814	968			
7:00 AM	TO	8:00 AM		299	299	719	809	1528	1827			
8:00 AM	TO	9:00 AM		204	204	717	728	1445	1649			
10:00 AM	TO	11:00 AM		102	102	567	509	1076	1178			
11:00 AM	TO	12:00 PM		118	118	636	576	1212	1330			
12:00 PM	TO	1:00 PM		123	123	680	677	1357	1480			
1:00 PM	TO	2:00 PM		127	127	731	668	1399	1526			
2:00 PM	TO	3:00 PM		125	125	760	735	1495	1620			
3:00 PM	TO	4:00 PM		120	120	857	755	1612	1732			
4:00 PM	TO	5:00 PM		175	175	988	821	1809	1984			
5:00 PM	TO	6:00 PM		180	180	1093	869	1962	2142			
6:00 PM	TO	7:00 PM		184	184	842	630	1472	1656			
TOTAL VOLUME				1911	1911	8916	8265	17181	19092			
PERCENTAGE				10.0%	10.0%	46.7%	43.3%	90.0%	100.0%			

A & F ENGINEERING CO., LLC
TRAFFIC VOLUME SUMMARY

CLIENT :
INTERSECTION :
DATE :

City of Noblesville
SR 32 & Hague Road
9/6/2017

DIRECTION OF TRAVEL : SOUTHBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	12	0	12				141	1	142	153	1	154
7:00 AM - 8:00 AM	42	0	42				250	7	257	292	7	299
8:00 AM - 9:00 AM	41	2	43				156	5	161	197	7	204
OFF TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
10:00 AM - 11:00 AM	28	0	28				74	0	74	102	0	102
11:00 AM - 12:00 PM	37	1	38				75	5	80	112	6	118
12:00 PM - 1:00 PM	33	3	36				82	5	87	115	8	123
1:00 PM - 2:00 PM	41	1	42				79	6	85	120	7	127
2:00 PM - 3:00 PM	32	3	35				80	10	90	112	13	125
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
3:00 PM - 4:00 PM	30	0	30				86	4	90	116	4	120
4:00 PM - 5:00 PM	49	0	49				124	2	126	173	2	175
5:00 PM - 6:00 PM	39	2	41				135	4	139	174	6	180
6:00 PM - 7:00 PM	46	0	46				137	1	138	183	1	184
PASSENGER	430						1419			1849		
	97.3%						96.6%			96.8%		
TRUCK	12						50			62		
	2.7%						3.4%			3.2%		
BOTH	442						1469			1911		
	23.1%						76.9%			100.0%		

DIRECTION OF TRAVEL : EASTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM	34	2	36	275	15	290				309	17	326
7:00 AM - 8:00 AM	82	12	94	584	41	625				666	53	719
8:00 AM - 9:00 AM	71	3	74	554	89	643				625	92	717
OFF TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
10:00 AM - 11:00 AM	51	2	53	453	61	514				504	63	567
11:00 AM - 12:00 PM	60	6	66	506	64	570				566	70	636
12:00 PM - 1:00 PM	76	6	82	549	49	598				625	55	680
1:00 PM - 2:00 PM	90	3	93	574	64	638				664	67	731
2:00 PM - 3:00 PM	103	10	113	580	67	647				683	77	760
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
3:00 PM - 4:00 PM	144	5	149	648	60	708				792	65	857
4:00 PM - 5:00 PM	244	2	246	699	43	742				943	45	988
5:00 PM - 6:00 PM	294	5	299	773	21	794				1067	26	1093
6:00 PM - 7:00 PM	173	1	174	655	13	668				828	14	842
PASSENGER	1422			6850						8272		
	96.1%			92.1%						92.8%		
TRUCK	57			587						644		
	3.9%			7.9%						7.2%		
BOTH	1479			7437						8916		
	16.6%			83.4%						100.0%		

DIRECTION OF TRAVEL : WESTBOUND

HOUR	LEFT			THROUGH			RIGHT			TOTAL		
AM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
6:00 AM - 7:00 AM				456	21	477	9	2	11	465	23	488
7:00 AM - 8:00 AM				720	59	779	27	3	30	747	62	809
8:00 AM - 9:00 AM				644	58	702	20	6	26	664	64	728
OFF TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
10:00 AM - 11:00 AM				429	53	482	24	3	27	453	56	509
11:00 AM - 12:00 PM				493	37	530	41	5	46	534	42	576
12:00 PM - 1:00 PM				553	70	623	52	2	54	605	72	677
1:00 PM - 2:00 PM				552	66	618	48	2	50	600	68	668
2:00 PM - 3:00 PM				615	67	682	52	1	53	667	68	735
PM TIME PERIOD	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH	PASS	TRUCK	BOTH
3:00 PM - 4:00 PM				636	52	688	62	5	67	698	57	755
4:00 PM - 5:00 PM				703	30	733	86	2	88	789	32	821
5:00 PM - 6:00 PM				731	21	752	115	2	117	846	23	869
6:00 PM - 7:00 PM				528	14	542	88	0	88	616	14	630
PASSENGER				7060			624			7684		
	92.8%			95.0%						93.0%		
TRUCK				548			33			581		
	7.2%			5.0%						7.0%		
BOTH				7608			657			8265		
	92.1%			7.9%						100.0%		

HCM 6th Signalized Intersection Summary
18: pleasant st/Hague Rd & SR 32

Proposed AM - Final

10/24/2017

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (veh/h)	110	450	310	5	690	30	220	20	5	30	20	340
Future Volume (veh/h)	110	450	310	5	690	30	220	20	5	30	20	340
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach		No			No			No			No	
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	120	489	337	5	750	33	239	22	5	33	22	370
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	196	873	740	304	873	740	280	541	123	614	33	553
Arrive On Green	0.47	0.47	0.47	0.47	0.47	0.47	0.37	0.37	0.37	0.37	0.37	0.37
Sat Flow, veh/h	691	1870	1585	663	1870	1585	992	1475	335	1383	90	1509
Grp Volume(v), veh/h	120	489	337	5	750	33	239	0	27	33	0	392
Grp Sat Flow(s),veh/h/ln	691	1870	1585	663	1870	1585	992	0	1810	1383	0	1599
Q Serve(g_s), s	6.6	11.3	8.6	0.3	21.4	0.7	9.7	0.0	0.6	0.9	0.0	12.3
Cycle Q Clear(g_c), s	28.0	11.3	8.6	11.7	21.4	0.7	22.0	0.0	0.6	1.5	0.0	12.3
Prop In Lane	1.00		1.00	1.00		1.00	1.00		0.19	1.00		0.94
Lane Grp Cap(c), veh/h	196	873	740	304	873	740	280	0	664	614	0	586
V/C Ratio(X)	0.61	0.56	0.46	0.02	0.86	0.04	0.85	0.00	0.04	0.05	0.00	0.67
Avail Cap(c_a), veh/h	196	873	740	304	873	740	280	0	664	614	0	586
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	27.9	11.6	10.8	15.8	14.2	8.7	26.8	0.0	12.2	12.7	0.0	15.9
Incr Delay (d2), s/veh	5.6	0.8	0.4	0.0	8.6	0.0	21.9	0.0	0.0	0.0	0.0	2.9
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	2.0	4.2	2.7	0.0	9.6	0.2	5.0	0.0	0.2	0.3	0.0	4.5
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	33.5	12.4	11.3	15.8	22.9	8.7	48.7	0.0	12.2	12.7	0.0	18.9
LnGrp LOS	C	B	B	B	C	A	D	A	B	B	A	B
Approach Vol, veh/h		946			788			266			425	
Approach Delay, s/veh		14.7			22.2			45.0			18.4	
Approach LOS		B			C			D			B	
Timer - Assigned Phs		2		4		6		8				
Phs Duration (G+Y+R _c), s		27.0		33.0		27.0		33.0				
Change Period (Y+R _c), s		5.0		5.0		5.0		5.0				
Max Green Setting (Gmax), s		22.0		28.0		22.0		28.0				
Max Q Clear Time (g_c+l1), s		24.0		30.0		14.3		23.4				
Green Ext Time (p_c), s		0.0		0.0		1.6		2.2				
Intersection Summary												
HCM 6th Ctrl Delay			21.1									
HCM 6th LOS			C									

HCM 6th Signalized Intersection Summary
18: pleasant st/Hague Rd & SR 32

Proposed PM - Final

10/24/2017

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (veh/h)	360	560	380	5	580	60	260	80	5	30	30	160
Future Volume (veh/h)	360	560	380	5	580	60	260	80	5	30	30	160
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No		No		No		No		No	No		No
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	391	609	413	5	630	65	283	87	5	33	33	174
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	359	1075	911	294	1075	911	322	525	30	434	78	410
Arrive On Green	0.57	0.57	0.57	0.57	0.57	0.57	0.30	0.30	0.30	0.30	0.30	0.30
Sat Flow, veh/h	750	1870	1585	552	1870	1585	1175	1752	101	1304	259	1366
Grp Volume(v), veh/h	391	609	413	5	630	65	283	0	92	33	0	207
Grp Sat Flow(s),veh/h/ln	750	1870	1585	552	1870	1585	1175	0	1852	1304	0	1625
Q Serve(g_s), s	28.7	16.4	12.0	0.5	17.3	1.5	15.8	0.0	2.9	1.5	0.0	8.2
Cycle Q Clear(g_c), s	46.0	16.4	12.0	16.9	17.3	1.5	24.0	0.0	2.9	4.5	0.0	8.2
Prop In Lane	1.00		1.00	1.00		1.00	1.00		0.05	1.00		0.84
Lane Grp Cap(c), veh/h	359	1075	911	294	1075	911	322	0	556	434	0	487
V/C Ratio(X)	1.09	0.57	0.45	0.02	0.59	0.07	0.88	0.00	0.17	0.08	0.00	0.42
Avail Cap(c_a), veh/h	359	1075	911	294	1075	911	322	0	556	434	0	487
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	29.2	10.7	9.8	16.0	10.9	7.5	33.5	0.0	20.6	22.3	0.0	22.5
Incr Delay (d2), s/veh	73.3	0.7	0.4	0.0	0.8	0.0	22.9	0.0	0.1	0.1	0.0	0.6
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	14.2	6.1	3.7	0.1	6.5	0.5	7.5	0.0	1.2	0.5	0.0	3.1
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	102.5	11.4	10.1	16.1	11.7	7.6	56.4	0.0	20.8	22.3	0.0	23.0
LnGrp LOS	F	B	B	B	B	A	E	A	C	C	A	C
Approach Vol, veh/h	1413				700			375			240	
Approach Delay, s/veh	36.3				11.4			47.7			23.0	
Approach LOS	D				B			D			C	
Timer - Assigned Phs	2		4		6		8					
Phs Duration (G+Y+R _c), s	29.0		51.0		29.0		51.0					
Change Period (Y+R _c), s	5.0		5.0		5.0		5.0					
Max Green Setting (Gmax), s	24.0		46.0		24.0		46.0					
Max Q Clear Time (g_c+l1), s	26.0		48.0		10.2		19.3					
Green Ext Time (p_c), s	0.0		0.0		1.1		5.0					
Intersection Summary												
HCM 6th Ctrl Delay			30.3									
HCM 6th LOS			C									

LANE SUMMARY

Site: 1 [SR 32 & Hague Road AM Peak - Two-Lane RAB]

SR 32 & Hague Road AM Peak - Two-Lane RAB

Site Category: (None)

Roundabout

Lane Use and Performance													
	Demand Flows			Deg.	Lane	Average	Level of	95% Back of	Queue	Lane	Lane	Cap.	Prob.
	Total	HV	Cap.	Satn	Util.	Delay	Service	Veh	Dist	Config	Length	Adj.	Block.
	veh/h	%	veh/h	v/c	%	sec			ft		ft	%	%
South: Pleasant Street													
Lane 1 ^d	239	2.0	798	0.300	100	7.9	LOS A	1.2	30.5	Full	1600	0.0	0.0
Lane 2	27	2.0	725	0.037	13 ⁵	5.3	LOS A	0.1	3.3	Full	1600	0.0	0.0
Approach	266	2.0		0.300		7.7	LOS A	1.2	30.5				
East: SR 32													
Lane 1	379	2.0	926	0.409	100	8.6	LOS A	2.0	50.4	Full	1600	0.0	0.0
Lane 2 ^d	409	2.0	1001	0.409	100	8.1	LOS A	2.0	49.9	Full	1600	0.0	0.0
Approach	788	2.0		0.409		8.3	LOS A	2.0	50.4				
North: Hague Road													
Lane 1	54	2.0	520	0.104	17 ⁵	8.2	LOS A	0.4	9.0	Full	1600	0.0	0.0
Lane 2 ^d	370	2.0	588	0.629	100	19.1	LOS B	4.1	104.1	Full	1600	0.0	0.0
Approach	424	2.0		0.629		17.7	LOS B	4.1	104.1				
West: SR 32													
Lane 1	460	2.0	1251	0.368	100	6.4	LOS A	2.0	51.1	Full	1600	0.0	0.0
Lane 2 ^d	486	2.0	1322	0.368	100	6.1	LOS A	2.0	49.8	Full	1600	0.0	0.0
Approach	946	2.0		0.368		6.3	LOS A	2.0	51.1				
Intersection	2424	2.0		0.629		9.1	LOS A	4.1	104.1				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Site tab).

Roundabout LOS Method: Same as Signalised Intersections.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

HCM Delay Formula option is used. Control Delay does not include Geometric Delay since Exclude Geometric Delay option applies.

Gap-Acceptance Capacity: Traditional M1.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

⁵ Lane under-utilisation found by the program

^d Dominant lane on roundabout approach

SIDRA INTERSECTION 8.0 | Copyright © 2000-2018 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: A&F ENGINEERING CO., LLC | Processed: Tuesday, October 30, 2018 2:54:46 PM

Project: Z:\2017\17068S - Noblesville, Traffic, Pleasant St. Bridge\SIDRA\SR 32 & Hague Street\SR 32 & Hague Road.sip8

LANE SUMMARY

Site: 1 [SR 32 & Hague Road PM Peak - Two-Lane RAB]

SR 32 & Hague Road AM Peak - Two-Lane RAB

Site Category: (None)

Roundabout

Lane Use and Performance													
	Demand Flows			Deg.	Lane	Average	Level of	95% Back of	Queue	Lane	Lane	Cap.	Prob.
	Total	HV	Cap.	Satn	Util.	Delay	Service	Veh	Dist	Config	Length	Adj.	Block.
	veh/h	%	veh/h	v/c	%	sec			ft		ft	%	%
South: Pleasant Street													
Lane 1 ^d	283	2.0	569	0.497	100	14.9	LOS B	2.6	65.0	Full	1600	0.0	0.0
Lane 2	92	2.0	502	0.184	37 ⁵	9.7	LOS A	0.6	16.2	Full	1600	0.0	0.0
Approach	375	2.0		0.497		13.6	LOS B	2.6	65.0				
East: SR 32													
Lane 1	332	2.0	648	0.513	100	13.8	LOS B	3.1	77.7	Full	1600	0.0	0.0
Lane 2 ^d	369	2.0	720	0.513	100	12.7	LOS B	3.1	78.8	Full	1600	0.0	0.0
Approach	701	2.0		0.513		13.2	LOS B	3.1	78.8				
North: Hague Road													
Lane 1	65	2.0	559	0.117	42 ⁵	7.9	LOS A	0.4	10.2	Full	1600	0.0	0.0
Lane 2 ^d	174	2.0	628	0.277	100	9.3	LOS A	1.0	26.1	Full	1600	0.0	0.0
Approach	239	2.0		0.277		8.9	LOS A	1.0	26.1				
West: SR 32													
Lane 1	687	2.0	1239	0.555	100	9.2	LOS A	4.1	103.5	Full	1600	0.0	0.0
Lane 2 ^d	726	2.0	1309	0.555	100	8.9	LOS A	4.0	101.2	Full	1600	0.0	0.0
Approach	1413	2.0		0.555		9.1	LOS A	4.1	103.5				
Intersection	2728	2.0		0.555		10.7	LOS B	4.1	103.5				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Site tab). Roundabout LOS Method: Same as Signalised Intersections.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

HCM Delay Formula option is used. Control Delay does not include Geometric Delay since Exclude Geometric Delay option applies.

Gap-Acceptance Capacity: Traditional M1.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

⁵ Lane under-utilisation found by the program

^d Dominant lane on roundabout approach

SIDRA INTERSECTION 8.0 | Copyright © 2000-2018 Akcelik and Associates Pty Ltd | sidrasolutions.com


Organisation: A&F ENGINEERING CO., LLC | Processed: Tuesday, October 30, 2018 3:00:49 PM

Project: Z:\2017\17068S - Noblesville, Traffic, Pleasant St. Bridge\SIDRA\SR 32 & Hague Street\SR 32 & Hague Road.sip8

Queues
18: pleasant st/Hague Rd & SR 32

Proposed AM - Final

10/25/2017




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	120	489	337	5	750	33	239	27	33	392
V/c Ratio	0.90	0.55	0.36	0.02	0.85	0.04	0.94	0.04	0.07	0.60
Control Delay	81.0	14.3	2.6	8.8	25.7	3.5	65.7	11.0	12.9	14.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	81.0	14.3	2.6	8.8	25.7	3.5	65.7	11.0	12.9	14.6
Queue Length 50th (ft)	38	120	0	1	227	0	79	5	8	70
Queue Length 95th (ft)	#132	200	36	6	#432	11	#202	18	23	148
Internal Link Dist (ft)		2918			652			1286		3234
Turn Bay Length (ft)	200			350			150		150	
Base Capacity (vph)	133	887	930	331	887	772	270	681	515	679
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.90	0.55	0.36	0.02	0.85	0.04	0.89	0.04	0.06	0.58

Intersection Summary

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	391	609	413	5	630	65	283	92	33	207
v/c Ratio	0.95	0.56	0.38	0.01	0.88	0.09	1.01	0.23	0.12	0.64
Control Delay	54.0	14.4	2.5	7.8	39.7	0.2	86.7	28.5	22.1	18.1
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	54.0	14.4	2.5	7.8	39.7	0.2	86.7	28.5	22.1	18.1
Queue Length 50th (ft)	132	152	0	1	279	0	~124	34	12	15
Queue Length 95th (ft)	#343	386	48	6	#537	0	#245	83	32	77
Internal Link Dist (ft)		2918			676			1286		3234
Turn Bay Length (ft)	200			350			150		150	
Base Capacity (vph)	413	1092	1098	435	721	717	279	486	282	500
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.95	0.56	0.38	0.01	0.87	0.09	1.01	0.19	0.12	0.41

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

QUEUE DISTANCE (%ILE)

Largest 95% Back of Queue Distance for any lane used by vehicle movement (feet)

Site: 1 [SR 32 & Hague Road AM Peak - Two-Lane RAB]


SR 32 & Hague Road AM Peak - Two-Lane RAB

Site Category: (None)

Roundabout

All Movement Classes

	Approaches				Intersection
	South	East	North	West	
Vehicle Queue (%ile)	30	50	104	51	104

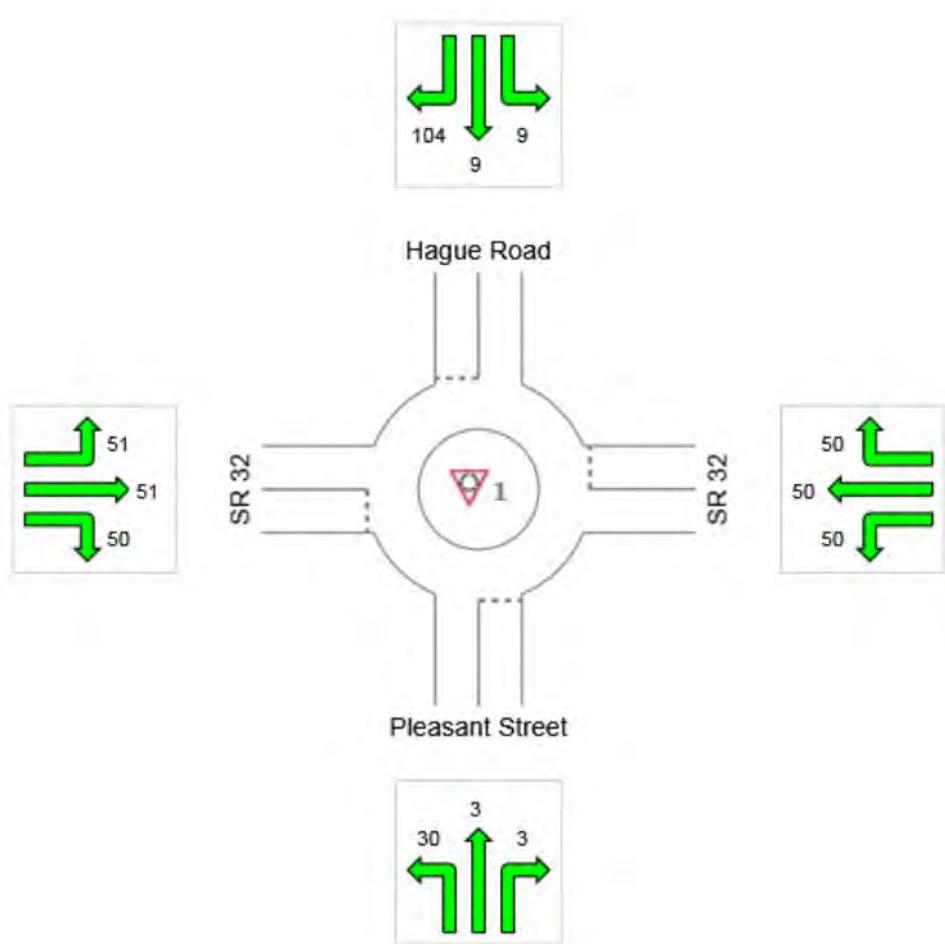

Colour code based on Queue Storage Ratio



QUEUE DISTANCE (%ILE)

Largest 95% Back of Queue Distance for any lane used by vehicle movement (feet)

▼ Site: 1 [SR 32 & Hague Road PM Peak - Two-Lane RAB]


SR 32 & Hague Road AM Peak - Two-Lane RAB

Site Category: (None)

Roundabout

All Movement Classes

	Approaches				Intersection
	South	East	North	West	
Vehicle Queue (%ile)	65	79	26	103	103

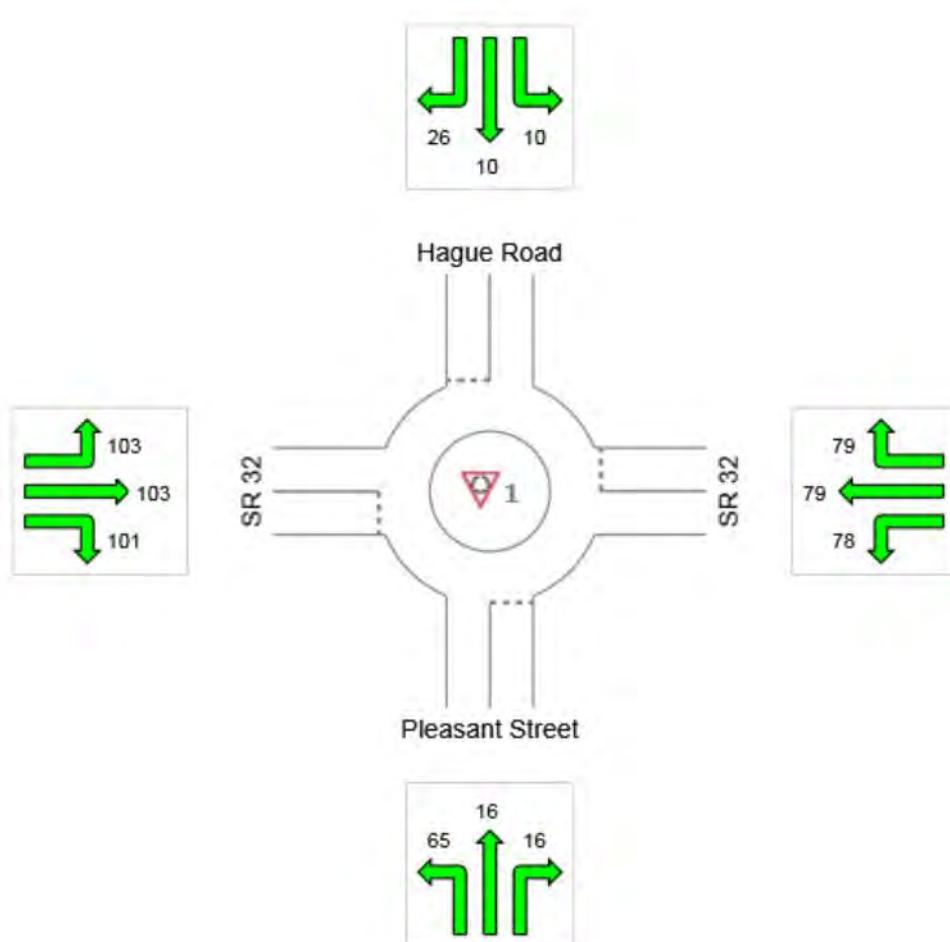

Colour code based on Queue Storage Ratio



24-HOUR TRAFFIC VOLUME COUNTS

SR 32 & HAGUE RD - TMC

Wed Sep 6, 2017

Full Length (1PM-1PM (+1))

All Classes (Lights and Motorcycles, Heavy)

All Movements

ID: 443718, Location: 40.043568, -86.039659

Provided by: A&F Engineering

8365 Keystone Crossing, Suite 201, Indianapolis, IN, 46240, US

Leg Direction	North Southbound				West Eastbound				East Westbound				
	Time	L	R	U	App	L	T	U	App	T	R	U	App
2017-09-06 1:00PM	42	85	0	127	93	638	0	731	618	50	0	668	1526
2:00PM	35	90	0	125	113	647	0	760	682	53	0	735	1620
3:00PM	30	90	0	120	149	708	0	857	688	67	0	755	1732
4:00PM	49	126	0	175	246	742	0	988	733	88	0	821	1984
5:00PM	41	139	0	180	299	794	0	1093	752	117	0	869	2142
6:00PM	46	138	0	184	174	668	0	842	542	88	0	630	1656
7:00PM	34	88	0	122	128	467	0	595	426	72	0	498	1215
8:00PM	25	70	0	95	90	317	0	407	359	53	0	412	914
9:00PM	8	33	0	41	61	177	0	238	247	26	0	273	552
10:00PM	6	12	0	18	30	77	0	107	96	6	0	102	227
11:00PM	5	8	1	14	15	59	0	74	54	5	0	59	147
2017-09-07 12:00AM	2	7	0	9	9	37	0	46	29	2	0	31	86
1:00AM	0	2	0	2	4	11	0	15	16	0	0	16	33
2:00AM	0	2	0	2	2	10	0	12	16	0	0	16	30
3:00AM	1	2	0	3	2	17	0	19	22	3	0	25	47
4:00AM	1	19	0	20	3	35	0	38	50	0	0	50	108
5:00AM	6	45	0	51	7	100	0	107	139	2	0	141	299
6:00AM	12	142	0	154	36	290	0	326	477	11	0	488	968
7:00AM	41	257	1	299	94	625	0	719	779	30	0	809	1827
8:00AM	43	161	0	204	74	643	0	717	702	26	0	728	1649
9:00AM	29	94	0	123	59	542	0	601	542	37	0	579	1303
10:00AM	28	74	0	102	53	514	0	567	482	27	0	509	1178
11:00AM	38	80	0	118	66	570	0	636	530	46	0	576	1330
12:00PM	36	87	0	123	82	598	0	680	623	54	0	677	1480
Total	558	1851	2	2411	1889	9286	0	11175	9604	863	0	10467	24053
% Approach	23.1%	76.8%	0.1%	-	16.9%	83.1%	0%	-	91.8%	8.2%	0%	-	-
% Total	2.3%	7.7%	0%	10.0%	7.9%	38.6%	0%	46.5%	39.9%	3.6%	0%	43.5%	-
Lights and Motorcycles	541	1793	2	2336	1826	8593	0	10419	8975	826	0	9801	22556
% Lights and Motorcycles	97.0%	96.9%	100%	96.9%	96.7%	92.5%	0%	93.2%	93.5%	95.7%	0%	93.6%	93.8%
Heavy	17	58	0	75	63	693	0	756	629	37	0	666	1497
% Heavy	3.0%	3.1%	0%	3.1%	3.3%	7.5%	0%	6.8%	6.5%	4.3%	0%	6.4%	6.2%

* L: Left, R: Right, T: Thru, U: U-Turn

SR 32 & CHERRY TREE RD - TMC

Wed Sep 6, 2017

Full Length (12PM-12PM (+1))

All Classes (Lights and Motorcycles, Heavy)

All Movements

ID: 443717, Location: 40.044999, -86.035065

Provided by: A&F Engineering

8365 Keystone Crossing, Suite 201, Indianapolis, IN, 46240, US

Leg Direction	South Northbound				West Eastbound				East Westbound				
Time	L	R	U	App	T	R	U	App	L	T	U	App	Int
2017-09-06 12:00PM	4	50	0	54	606	6	0	612	31	658	0	689	1355
1:00PM	5	63	0	68	674	6	0	680	53	671	0	724	1472
2:00PM	5	62	0	67	673	8	0	681	48	739	1	788	1536
3:00PM	3	60	0	63	733	6	0	739	65	747	0	812	1614
4:00PM	5	88	0	93	767	18	0	785	67	806	0	873	1751
5:00PM	3	102	0	105	803	12	0	815	79	850	0	929	1849
6:00PM	11	102	0	113	712	12	0	724	57	619	0	676	1513
7:00PM	5	48	0	53	486	3	0	489	53	490	1	544	1086
8:00PM	5	29	0	34	332	7	0	339	62	397	0	459	832
9:00PM	2	11	0	13	179	2	0	181	16	268	0	284	478
10:00PM	0	5	0	5	84	0	0	84	8	105	0	113	202
11:00PM	0	1	0	1	62	0	0	62	6	54	0	60	123
2017-09-07 12:00AM	0	0	0	0	37	1	0	38	2	31	0	33	71
1:00AM	0	2	0	2	9	0	0	9	1	15	0	16	27
2:00AM	0	0	0	0	11	0	0	11	0	17	0	17	28
3:00AM	2	2	0	4	17	0	0	17	6	25	0	31	52
4:00AM	0	1	0	1	37	0	0	37	3	51	0	54	92
5:00AM	0	3	0	3	107	0	0	107	1	146	0	147	257
6:00AM	0	28	0	28	310	3	0	313	22	497	0	519	860
7:00AM	4	78	0	82	662	6	0	668	24	816	0	840	1590
8:00AM	3	59	0	62	675	5	0	680	28	702	1	731	1473
9:00AM	2	40	0	42	558	5	0	563	29	575	0	604	1209
10:00AM	4	38	0	42	527	8	0	535	31	506	0	537	1114
11:00AM	3	56	0	59	595	3	0	598	33	577	0	610	1267
Total	66	928	0	994	9656	111	0	9767	725	10362	3	11090	21851
% Approach	6.6%	93.4%	0%	-	98.9%	1.1%	0%	-	6.5%	93.4%	0%	-	-
% Total	0.3%	4.2%	0%	4.5%	44.2%	0.5%	0%	44.7%	3.3%	47.4%	0%	50.8%	-
Lights and Motorcycles	65	905	0	970	8977	106	0	9083	709	9641	3	10353	20406
% Lights and Motorcycles	98.5%	97.5%	0%	97.6%	93.0%	95.5%	0%	93.0%	97.8%	93.0%	100%	93.4%	93.4%
Heavy	1	23	0	24	679	5	0	684	16	721	0	737	1445
% Heavy	1.5%	2.5%	0%	2.4%	7.0%	4.5%	0%	7.0%	2.2%	7.0%	0%	6.6%	6.6%

* L: Left, R: Right, T: Thru, U: U-Turn

SR 32 & River Rd - TMC

Provided by: A&F Engineering

Wed Sep 6, 2017

8365 Keystone Crossing, Suite 201, Indianapolis, IN, 46240, US

Full Length (12PM-12PM (+1))

All Classes (Lights and Motorcycles, Heavy)

All Movements

ID: 443656, Location: 40.047009, -86.028038

Leg Direction	South Northbound					North Southbound					West Eastbound					East Westbound					
Time	L	T	R	U	App	L	T	R	U	App	L	T	R	U	App	L	T	R	U	App	Int
2017-09-06																					
12:00PM	117	93	104	0	314	53	73	65	0	191	42	540	72	0	654	100	540	47	0	687	1846
1:00PM	106	81	102	0	289	48	98	61	0	207	55	593	71	0	719	83	555	39	0	677	1892
2:00PM	125	97	103	0	325	43	104	61	0	208	51	594	71	0	716	89	606	39	0	734	1983
3:00PM	133	121	135	0	389	47	122	79	0	248	46	640	63	0	749	106	572	27	0	705	2091
4:00PM	136	124	152	0	412	59	122	84	0	265	69	669	69	0	807	116	653	11	0	780	2264
5:00PM	142	139	193	0	474	52	133	103	0	288	50	720	54	0	824	111	650	28	0	789	2375
6:00PM	111	78	115	0	304	43	98	63	0	204	41	722	46	0	809	63	507	28	0	598	1915
7:00PM	72	48	68	0	188	22	44	24	0	90	31	507	39	0	577	88	425	15	0	528	1383
8:00PM	40	44	39	0	123	22	40	26	0	88	14	302	38	0	354	66	359	17	0	442	1007
9:00PM	20	38	28	0	86	8	29	9	0	46	7	185	18	0	210	50	244	7	0	301	643
10:00PM	17	17	19	0	53	2	21	3	0	26	6	82	15	0	103	38	86	3	0	127	309
11:00PM	5	15	7	0	27	2	13	7	0	22	4	52	12	0	68	18	48	0	0	66	183
2017-09-07																					
12:00AM	1	8	7	0	16	1	3	0	0	4	1	32	2	0	35	9	32	3	0	44	99
1:00AM	0	3	5	0	8	0	2	0	0	2	0	13	0	0	13	5	16	0	0	21	44
2:00AM	3	5	5	0	13	1	3	1	0	5	0	9	1	0	10	4	14	0	0	18	46
3:00AM	4	2	1	0	7	0	4	5	0	9	0	14	3	0	17	5	18	3	0	26	59
4:00AM	1	3	6	0	10	1	5	2	0	8	4	30	0	0	34	9	52	3	0	64	116
5:00AM	9	15	20	0	44	2	24	8	0	34	0	87	13	0	100	23	125	5	0	153	331
6:00AM	37	17	54	0	108	12	86	30	0	128	3	269	23	0	295	52	434	6	0	492	1023
7:00AM	77	71	99	0	247	12	130	69	0	211	20	638	56	0	714	91	688	28	0	807	1979
8:00AM	70	73	84	0	227	22	135	71	0	228	44	552	65	0	661	70	587	27	0	684	1800
9:00AM	87	69	88	0	244	42	76	54	0	172	31	507	56	0	594	65	469	28	0	562	1572
10:00AM	58	71	108	0	237	37	70	45	0	152	28	477	59	0	564	78	451	39	0	568	1521
11:00AM	102	84	100	0	286	69	77	53	0	199	33	551	54	0	638	78	457	42	0	577	1700
Total	1473	1316	1642	0	4431	600	1512	923	0	3035	580	8785	900	0	10265	1417	8588	445	0	10450	28181
% Approach	33.2%	29.7%	37.1%	0%	-	19.8%	49.8%	30.4%	0%	-	5.7%	85.6%	8.8%	0%	-	13.6%	82.2%	4.3%	0%	-	-
% Total	5.2%	4.7%	5.8%	0%	15.7%	2.1%	5.4%	3.3%	0%	10.8%	2.1%	31.2%	3.2%	0%	36.4%	5.0%	30.5%	1.6%	0%	37.1%	-
Lights and Motorcycles	1205	1188	1536	0	3929	585	1370	905	0	2860	567	8352	655	0	9574	1330	8183	429	0	9942	26305
% Lights and Motorcycles	81.8%	90.3%	93.5%	0%	88.7%	97.5%	90.6%	98.0%	0%	94.2%	97.8%	95.1%	72.8%	0%	93.3%	93.9%	95.3%	96.4%	0%	95.1%	93.3%
Heavy	268	128	106	0	502	15	142	18	0	175	13	433	245	0	691	87	405	16	0	508	1876
% Heavy	18.2%	9.7%	6.5%	0%	11.3%	2.5%	9.4%	2.0%	0%	5.8%	2.2%	4.9%	27.2%	0%	6.7%	6.1%	4.7%	3.6%	0%	4.9%	6.7%

*L: Left, R: Right, T: Thru, U: U-Turn

SR 32/38 & HWY 19 - TMC

Tue Sep 12, 2017

Full Length (1PM-1PM (+1))

All Classes (Lights and Motorcycles, Heavy)

All Movements

ID: 445349, Location: 40.046498, -86.01887

Provided by: A&F Engineering

8365 Keystone Crossing, Suite 201, Indianapolis, IN, 46240, US

Leg Direction	North Southbound				West Eastbound				East Westbound				
Time	L	R	U	App	L	T	U	App	T	R	U	App	Int
2017-09-12 1:00PM	76	95	0	171	104	805	0	909	866	37	0	903	1983
2:00PM	47	116	0	163	134	914	0	1048	897	47	0	944	2155
3:00PM	68	105	0	173	168	953	0	1121	840	44	0	884	2178
4:00PM	60	116	0	176	234	1161	0	1395	970	59	0	1029	2600
5:00PM	52	119	0	171	226	1182	0	1408	971	41	0	1012	2591
6:00PM	64	84	0	148	191	913	0	1104	797	39	0	836	2088
7:00PM	33	80	0	113	119	574	0	693	673	34	0	707	1513
8:00PM	31	52	0	83	80	399	0	479	586	28	0	614	1176
9:00PM	24	51	0	75	49	197	0	246	353	15	0	368	689
10:00PM	9	22	0	31	27	132	0	159	171	4	0	175	365
11:00PM	7	11	0	18	16	78	0	94	85	3	0	88	200
2017-09-13 12:00AM	2	1	0	3	12	40	0	52	51	2	0	53	108
1:00AM	3	4	0	7	3	36	0	39	33	2	0	35	81
2:00AM	2	1	0	3	4	25	0	29	26	0	0	26	58
3:00AM	1	8	0	9	5	30	0	35	32	0	0	32	76
4:00AM	7	24	0	31	3	69	0	72	81	1	0	82	185
5:00AM	25	46	0	71	17	196	0	213	211	5	0	216	500
6:00AM	54	128	0	182	72	477	0	549	591	17	0	608	1339
7:00AM	140	245	0	385	157	834	0	991	858	30	0	888	2264
8:00AM	106	181	0	287	117	807	0	924	837	20	0	857	2068
9:00AM	81	112	0	193	75	803	0	878	693	45	0	738	1809
10:00AM	74	63	0	137	87	757	0	844	685	39	0	724	1705
11:00AM	63	84	0	147	104	830	0	934	766	26	0	792	1873
12:00PM	81	86	0	167	116	843	0	959	805	49	0	854	1980
Total	1110	1834	0	2944	2120	13055	0	15175	12878	587	0	13465	31584
% Approach	37.7%	62.3%	0%	-	14.0%	86.0%	0%	-	95.6%	4.4%	0%	-	-
% Total	3.5%	5.8%	0%	9.3%	6.7%	41.3%	0%	48.0%	40.8%	1.9%	0%	42.6%	-
Lights and Motorcycles	1072	1722	0	2794	1995	12403	0	14398	12262	562	0	12824	30016
% Lights and Motorcycles	96.6%	93.9%	0%	94.9%	94.1%	95.0%	0%	94.9%	95.2%	95.7%	0%	95.2%	95.0%
Heavy	38	112	0	150	125	652	0	777	616	25	0	641	1568
% Heavy	3.4%	6.1%	0%	5.1%	5.9%	5.0%	0%	5.1%	4.8%	4.3%	0%	4.8%	5.0%

* L: Left, R: Right, T: Thru, U: U-Turn

SR 32/38 & 8TH ST - TMC

Tue Sep 12, 2017

Full Length (1PM-1PM (+1))

All Classes (Lights and Motorcycles, Heavy)

All Movements

ID: 445421, Location: 40.045623, -86.014715

Provided by: A&F Engineering

8365 Keystone Crossing, Suite 201, Indianapolis, IN, 46240, US

Leg Direction	South Northbound					North Southbound					West Eastbound					East Westbound					
Time	L	T	R	U	App	L	T	R	U	App	L	T	R	U	App	L	T	R	U	App	Int
2017-09-12																					
1:00PM	254	178	11	0	443	35	158	23	0	216	13	480	373	0	866	12	631	54	0	697	2222
2:00PM	281	180	19	0	480	19	129	29	0	177	15	527	391	0	933	11	647	36	0	694	2284
3:00PM	269	188	10	0	467	25	175	29	0	229	17	533	454	0	1004	8	580	41	0	629	2329
4:00PM	302	248	13	0	563	27	194	22	0	243	17	634	552	0	1203	10	679	36	0	725	2734
5:00PM	319	275	9	0	603	20	187	13	0	220	16	645	580	0	1241	6	695	22	1	724	2788
6:00PM	275	184	9	0	468	21	134	4	0	159	14	560	394	0	968	2	566	29	0	597	2192
7:00PM	223	120	4	0	347	16	80	7	0	103	5	349	249	0	603	10	472	24	0	506	1559
8:00PM	198	99	2	0	299	13	53	7	0	73	7	253	158	0	418	5	415	16	0	436	1226
9:00PM	117	47	3	0	167	6	36	4	0	46	0	135	78	0	213	4	245	11	0	260	686
10:00PM	60	26	2	0	88	1	9	1	0	11	2	82	46	0	130	2	111	3	0	116	345
11:00PM	29	12	2	0	43	3	9	2	0	14	1	57	24	0	82	1	54	2	0	57	196
2017-09-13																					
12:00AM	17	7	1	0	25	0	6	0	0	6	1	25	14	0	40	1	35	0	0	36	107
1:00AM	11	2	0	0	13	0	3	0	0	3	0	24	12	0	36	0	23	2	0	25	77
2:00AM	6	2	0	0	8	0	0	0	0	0	1	14	12	0	27	0	18	0	0	18	53
3:00AM	6	0	0	0	6	0	4	1	0	5	0	20	11	0	31	1	25	1	0	27	69
4:00AM	26	2	1	0	29	0	6	0	0	6	0	30	49	0	79	0	54	0	0	54	168
5:00AM	52	7	3	0	62	2	37	0	0	39	0	106	113	0	219	5	172	1	0	178	498
6:00AM	152	45	4	0	201	5	84	3	0	92	1	233	277	0	511	4	454	3	0	461	1265
7:00AM	220	118	8	0	346	15	199	10	0	224	9	478	382	0	869	5	682	15	0	702	2141
8:00AM	228	139	6	0	373	22	195	14	0	231	20	437	439	0	896	3	629	27	0	659	2159
9:00AM	192	90	15	0	297	23	127	29	0	179	18	477	378	0	873	5	549	62	0	616	1965
10:00AM	216	105	16	0	337	31	120	12	0	163	18	496	341	0	855	10	498	28	0	536	1891
11:00AM	243	102	23	0	368	26	134	14	0	174	17	478	363	0	858	8	542	23	0	573	1973
12:00PM	254	142	20	0	416	36	149	23	0	208	28	503	383	0	914	15	589	70	0	674	2212
Total	3950	2318	181	0	6449	346	2228	247	0	2821	220	7576	6073	0	13869	128	9365	506	1	10000	33139
% Approach	61.2%	35.9%	2.8%	0%	-	12.3%	79.0%	8.8%	0%	-	1.6%	54.6%	43.8%	0%	-	1.3%	93.7%	5.1%	0%	-	-
% Total	11.9%	7.0%	0.5%	0%	19.5%	1.0%	6.7%	0.7%	0%	8.5%	0.7%	22.9%	18.3%	0%	41.9%	0.4%	28.3%	1.5%	0%	30.2%	-
Lights and Motorcycles	3814	2284	170	0	6268	334	2188	244	0	2766	218	7055	5924	0	13197	120	8854	503	1	9478	31709
% Lights and Motorcycles	96.6%	98.5%	93.9%	0%	97.2%	96.5%	98.2%	98.8%	0%	98.1%	99.1%	93.1%	97.5%	0%	95.2%	93.8%	94.5%	99.4%	100%	94.8%	95.7%
Heavy	136	34	11	0	181	12	40	3	0	55	2	521	149	0	672	8	511	3	0	522	1430
% Heavy	3.4%	1.5%	6.1%	0%	2.8%	3.5%	1.8%	1.2%	0%	1.9%	0.9%	6.9%	2.5%	0%	4.8%	6.3%	5.5%	0.6%	0%	5.2%	4.3%

* L: Left, R: Right, T: Thru, U: U-Turn

SR 32/38 & 14TH ST - TMC

Tue Sep 26, 2017

Full Length (1PM-1PM (+1))

All Classes (Lights and Motorcycles, Heavy)

All Movements

ID: 451888, Location: 40.045683, -86.007614

Provided by: A&F Engineering

8365 Keystone Crossing, Suite 201, Indianapolis, IN, 46240, US

Leg Direction	North Southbound				West Eastbound				East Westbound				
Time	L	R	U	App	L	T	U	App	T	R	U	App	Int
2017-09-26 1:00PM	4	1	0	5	2	521	0	523	528	4	0	532	1060
2:00PM	2	3	0	5	7	573	0	580	544	5	0	549	1134
3:00PM	1	4	0	5	12	601	0	613	567	4	0	571	1189
4:00PM	3	1	0	4	20	540	0	560	486	13	0	499	1063
5:00PM	1	1	0	2	19	635	0	654	508	11	0	519	1175
6:00PM	3	3	0	6	11	521	0	532	486	14	0	500	1038
7:00PM	0	5	0	5	5	397	0	402	379	4	0	383	790
8:00PM	3	1	0	4	0	281	0	281	348	3	0	351	636
9:00PM	1	1	0	2	4	198	0	202	236	0	0	236	440
10:00PM	0	0	0	0	0	110	0	110	115	1	0	116	226
11:00PM	0	0	0	0	0	65	0	65	64	0	0	64	129
2017-09-27 12:00AM	1	0	0	1	0	33	0	33	23	0	0	23	57
1:00AM	0	0	0	0	0	25	0	25	23	0	0	23	48
2:00AM	0	0	0	0	0	18	0	18	10	0	0	10	28
3:00AM	1	0	0	1	0	19	0	19	20	0	0	20	40
4:00AM	0	0	0	0	0	33	0	33	64	0	0	64	97
5:00AM	2	1	0	3	0	98	0	98	162	0	0	162	263
6:00AM	0	1	0	1	0	231	0	231	434	1	0	435	667
7:00AM	3	1	0	4	0	389	0	389	576	6	0	582	975
8:00AM	0	1	0	1	5	443	0	448	591	4	0	595	1044
9:00AM	5	1	0	6	2	510	0	512	493	0	0	493	1011
10:00AM	3	1	0	4	6	518	0	524	522	2	0	524	1052
11:00AM	3	1	0	4	6	529	0	535	506	5	0	511	1050
12:00PM	3	8	0	11	5	563	0	568	546	10	0	556	1135
Total	39	35	0	74	104	7851	0	7955	8231	87	0	8318	16347
% Approach	52.7%	47.3%	0%	-	1.3%	98.7%	0%	-	99.0%	1.0%	0%	-	-
% Total	0.2%	0.2%	0%	0.5%	0.6%	48.0%	0%	48.7%	50.4%	0.5%	0%	50.9%	-
Lights and Motorcycles	36	31	0	67	100	7375	0	7475	7782	85	0	7867	15409
% Lights and Motorcycles	92.3%	88.6%	0%	90.5%	96.2%	93.9%	0%	94.0%	94.5%	97.7%	0%	94.6%	94.3%
Heavy	3	4	0	7	4	476	0	480	449	2	0	451	938
% Heavy	7.7%	11.4%	0%	9.5%	3.8%	6.1%	0%	6.0%	5.5%	2.3%	0%	5.4%	5.7%

* L: Left, R: Right, T: Thru, U: U-Turn

SR 32/38 & CUMBERLAND RD - TMC

Thu Sep 21, 2017

Full Length (2PM-2PM (+1))

All Classes (Lights and Motorcycles, Heavy)

All Movements

ID: 448855, Location: 40.045641, -85.995666

Provided by: A&F Engineering

8365 Keystone Crossing, Suite 201, Indianapolis, IN, 46240, US

Leg Direction	South Northbound					North Southbound					West Eastbound					East Westbound					
Time	L	T	R	U	App	L	T	R	U	App	L	T	R	U	App	L	T	R	U	App	Int
2017-09-21																					
2:00PM	63	179	64	0	306	172	199	115	0	486	91	526	41	0	658	19	422	104	0	545	1995
3:00PM	62	173	83	0	318	152	156	101	0	409	68	502	38	0	608	15	425	88	0	528	1863
4:00PM	66	233	130	0	429	193	198	99	0	490	67	458	26	0	551	23	446	134	0	603	2073
5:00PM	57	271	132	0	460	169	187	90	0	446	76	458	27	0	561	8	477	157	0	642	2109
6:00PM	55	173	61	0	289	122	148	75	0	345	87	487	41	0	615	7	394	135	0	536	1785
7:00PM	49	129	37	0	215	129	103	92	0	324	57	428	35	0	520	10	303	88	0	401	1460
8:00PM	47	117	45	0	209	135	109	67	0	311	48	363	32	0	443	12	260	42	0	314	1277
9:00PM	37	72	22	0	131	62	37	23	0	122	35	230	19	0	284	5	172	49	0	226	763
10:00PM	9	50	10	0	69	23	20	17	0	60	19	115	7	0	141	0	87	21	0	108	378
11:00PM	4	22	7	0	33	14	12	4	0	30	5	71	1	0	77	0	41	16	0	57	197
2017-09-22																					
12:00AM	6	22	3	0	31	12	2	2	0	16	5	40	3	0	48	0	26	6	0	32	127
1:00AM	0	10	0	0	10	4	1	4	0	9	3	18	0	0	21	0	25	3	0	28	68
2:00AM	1	6	1	0	8	4	4	2	0	10	1	10	1	0	12	0	15	2	0	17	47
3:00AM	1	6	0	0	7	4	2	3	0	9	2	16	0	0	18	0	24	2	0	26	60
4:00AM	3	5	1	0	9	6	4	6	0	16	2	36	1	0	39	0	49	6	0	55	119
5:00AM	12	21	1	0	34	32	13	12	0	57	13	92	6	0	111	5	144	13	0	162	364
6:00AM	25	57	4	0	86	109	38	37	0	184	19	229	13	0	261	1	371	49	0	421	952
7:00AM	52	250	19	0	321	155	117	123	0	395	84	334	19	0	437	10	600	146	0	756	1909
8:00AM	46	129	13	0	188	128	121	70	0	319	68	371	35	0	474	9	510	73	0	592	1573
9:00AM	40	100	19	0	159	131	106	76	0	313	59	384	36	0	479	8	456	77	0	541	1492
10:00AM	61	124	33	0	218	143	123	90	0	356	72	458	51	0	581	16	506	84	0	606	1761
11:00AM	58	134	48	0	240	135	115	78	0	328	63	531	59	0	653	28	436	66	0	530	1751
12:00PM	77	204	73	0	354	134	141	81	0	356	83	512	60	0	655	21	473	99	0	593	1958
1:00PM	60	192	78	0	330	174	195	94	0	463	82	528	65	0	675	20	518	99	0	637	2105
Total	891	2679	884	0	4454	2342	2151	1361	0	5854	1109	7197	616	0	8922	217	7180	1559	0	8956	28186
% Approach	20.0%	60.1%	19.8%	0%	-	40.0%	36.7%	23.2%	0%	-	12.4%	80.7%	6.9%	0%	-	2.4%	80.2%	17.4%	0%	-	-
% Total	3.2%	9.5%	3.1%	0%	15.8%	8.3%	7.6%	4.8%	0%	20.8%	3.9%	25.5%	2.2%	0%	31.7%	0.8%	25.5%	5.5%	0%	31.8%	-
Lights and Motorcycles	874	2600	865	0	4339	2281	2134	1350	0	5765	1096	6704	607	0	8407	214	6760	1525	0	8499	27010
% Lights and Motorcycles	98.1%	97.1%	97.9%	0%	97.4%	97.4%	99.2%	99.2%	0%	98.5%	98.8%	93.1%	98.5%	0%	94.2%	98.6%	94.2%	97.8%	0%	94.9%	95.8%
Heavy	17	79	19	0	115	61	17	11	0	89	13	493	9	0	515	3	420	34	0	457	1176
% Heavy	1.9%	2.9%	2.1%	0%	2.6%	2.6%	0.8%	0.8%	0%	1.5%	1.2%	6.9%	1.5%	0%	5.8%	1.4%	5.8%	2.2%	0%	5.1%	4.2%

*L: Left, R: Right, T: Thru, U: U-Turn

SR 32/38 & SR 37 - TMC

Tue Aug 29, 2017

Full Length (3PM-3PM (+1))

All Classes (Lights and Motorcycles, Heavy)

All Movements

ID: 442136, Location: 40.045656, -85.994125

Provided by: A&F Engineering

8365 Keystone Crossing, Suite 201, Indianapolis, IN, 46240, US

Leg Direction	South Northbound					North Southbound					West Eastbound					East Westbound					
Time	L	T	R	U	App	L	T	R	U	App	L	T	R	U	App	L	T	R	U	App	Int
2017-08-29																					
3:00PM	210	767	170	2	1149	98	583	52	1	734	103	380	264	0	747	131	275	115	0	521	3151
4:00PM	201	1012	234	1	1448	107	580	58	0	745	74	436	254	0	764	145	361	180	0	686	3643
5:00PM	246	1163	187	1	1597	89	622	63	0	774	96	434	258	0	788	132	393	179	1	705	3864
6:00PM	198	892	143	0	1233	90	594	52	2	738	109	372	251	0	732	103	254	111	0	468	3171
7:00PM	156	616	106	0	878	75	532	27	0	634	73	311	249	0	633	93	153	76	0	322	2467
8:00PM	105	508	82	0	695	69	407	22	1	499	61	183	222	0	466	65	157	74	0	296	1956
9:00PM	83	357	59	0	499	27	207	31	0	265	41	136	99	0	276	46	90	46	0	182	1222
10:00PM	32	211	51	0	294	14	100	17	0	131	13	84	56	0	153	32	57	28	0	117	695
11:00PM	19	115	29	0	163	9	72	4	0	85	9	55	36	0	100	14	33	18	0	65	413
2017-08-30																					
12:00AM	9	49	13	0	71	2	34	3	0	39	3	29	16	0	48	11	21	8	0	40	198
1:00AM	7	25	12	0	44	4	20	2	0	26	3	20	10	0	33	11	20	4	0	35	138
2:00AM	4	20	14	0	38	2	28	1	0	31	4	12	14	0	30	6	3	3	0	12	111
3:00AM	9	18	5	0	32	5	47	5	0	57	2	14	12	0	28	7	9	3	0	19	136
4:00AM	7	36	12	0	55	13	131	7	0	151	3	16	15	0	34	13	38	2	0	53	293
5:00AM	30	81	17	0	128	13	416	23	0	452	10	43	70	0	123	43	110	10	0	163	866
6:00AM	74	246	36	0	356	39	887	65	0	991	20	175	154	0	349	104	299	55	0	458	2154
7:00AM	135	454	73	0	662	98	1042	93	0	1233	31	273	180	0	484	177	456	126	0	759	3138
8:00AM	181	360	82	0	623	80	821	85	1	987	29	257	199	0	485	174	420	64	0	658	2753
9:00AM	179	375	102	1	657	65	604	72	0	741	47	258	257	0	562	121	302	66	0	489	2449
10:00AM	183	376	108	0	667	55	482	54	0	591	65	275	257	0	597	151	236	58	0	445	2300
11:00AM	206	419	130	1	756	64	543	69	0	676	84	294	304	0	682	175	253	62	0	490	2604
12:00PM	230	533	126	1	890	79	532	52	1	664	76	332	332	0	740	170	297	73	1	541	2835
1:00PM	248	518	129	1	896	63	484	51	0	598	67	289	307	0	663	163	310	88	0	561	2718
2:00PM	200	670	146	3	1019	71	496	34	0	601	72	338	295	0	705	164	295	94	0	553	2878
Total	2952	9821	2066	11	14850	1231	10264	942	6	12443	1095	5016	4111	0	10222	2251	4842	1543	2	8638	46153
% Approach	19.9%	66.1%	13.9%	0.1%	-	9.9%	82.5%	7.6%	0%	-	10.7%	49.1%	40.2%	0%	-	26.1%	56.1%	17.9%	0%	-	-
% Total	6.4%	21.3%	4.5%	0%	32.2%	2.7%	22.2%	2.0%	0%	27.0%	2.4%	10.9%	8.9%	0%	22.1%	4.9%	10.5%	3.3%	0%	18.7%	-
Lights and Motorcycles	2843	9425	1968	10	14246	1175	9857	902	6	11940	1050	4688	3925	0	9663	2154	4548	1477	2	8181	44030
% Lights and Motorcycles	96.3%	96.0%	95.3%	90.9%	95.9%	95.5%	96.0%	95.8%	100%	96.0%	95.9%	93.5%	95.5%	0%	94.5%	95.7%	93.9%	95.7%	100%	94.7%	95.4%
Heavy	109	396	98	1	604	56	407	40	0	503	45	328	186	0	559	97	294	66	0	457	2123
% Heavy	3.7%	4.0%	4.7%	9.1%	4.1%	4.5%	4.0%	4.2%	0%	4.0%	4.1%	6.5%	4.5%	0%	5.5%	4.3%	6.1%	4.3%	0%	5.3%	4.6%

*L: Left, R: Right, T: Thru, U: U-Turn